

## **OIL ANALYSIS REPORT**

ISO

### Machine Id

NK 112332 Component Compressor Fluid CIMARRON HB-150 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90004126	TO90003965	
Sample Date		Client Info		05 Jun 2024	11 Apr 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ATTENTION	ABNORMAL	
		and the set	l'act // acces		to be a second	history O
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		0	4	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m		<1	<1	
Titanium	ppm	ASTM D5185m		0	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	<1	2	
Lead	ppm	ASTM D5185m	>25	<1	0	
Copper	ppm	ASTM D5185m		0	<1	
Tin	ppm	ASTM D5185m	>15	2	<1	
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		<1	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	2	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	<1	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	0	2	<1	
Calcium	ppm	ASTM D5185m	0	2	1	
Phosphorus	ppm	ASTM D5185m	0	20	47	
Zinc	ppm	ASTM D5185m	0	10	37	
Sulfur	ppm	ASTM D5185m	0	378	524	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	
Sodium	ppm	ASTM D5185m		<1	8	
Potassium	ppm	ASTM D5185m	>20	5	1	
Water	%	ASTM D6304	>2.26	1.30	▲ 0.402	
ppm Water	ppm	ASTM D6304	>22600	13000	4026	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	13820	10830	
Particles >6µm		ASTM D7647		2971	2438	
Particles >14µm		ASTM D7647	>320	111	160	
Particles >21µm		ASTM D7647		20	37	
Particles >38µm		ASTM D7647	>20	2	1	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>21/19/14</b>	21/18/14	
FLUID DEGRADA		method	limit/base	current	history1	history2
	mg KOH/g	ASTM D8045		0.25	0.29	
Acid Number (AN)	iiiy i∖∪⊓/ÿ	A0 HVI D0040		0.23	0.23	

Contact/Location: CARLOS LEAL - CIMCAR Page 1 of 2



# **OIL ANALYSIS REPORT**

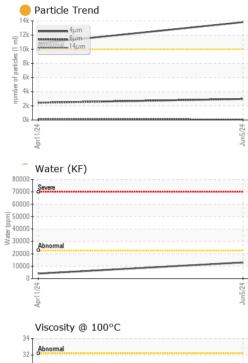

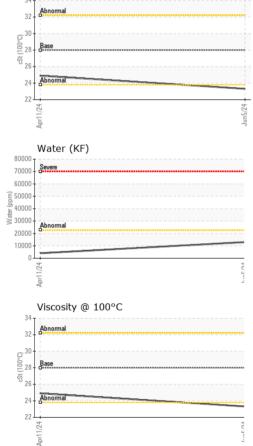



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CIMCAR [WUSCAR] 06205576 (Generated: 06/22/2024 14:47:47) Rev: 1

Certificate 12367

Contact/Location: CARLOS LEAL - CIMCAR

F: