

## **OIL ANALYSIS REPORT**

# Sample Rating Trend



Machine Id

# LEROI 111923 - HP4 (S/N LE17275)

Compressor

CIMARRON HB-150 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2024	Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90004077	TO90004235	
Sample Date		Client Info		05 Jun 2024	02 May 2024	
•	hrs	Client Info		05 Juli 2024	,	
Machine Age		Client Info		0	0	
Oil Age Oil Changed	hrs	Client Info		N/A	N/A	
		Client Info		N/A NORMAL	ABNORMAL	
Sample Status				NORWAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	28	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m		<1	<1	
Titanium	ppm	ASTM D5185m		0	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	<1	2	
Lead	ppm	ASTM D5185m	>25	<1	0	
Copper	ppm	ASTM D5185m	>50	0	<1	
Tin	ppm	ASTM D5185m	>15	2	<1	
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	0	
Barium	ppm	ASTM D5185m	0	0	1	
Molybdenum	ppm	ASTM D5185m	0	0	<1	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m	0	3	<1	
Calcium	ppm	ASTM D5185m	0	2	4	
Phosphorus	ppm	ASTM D5185m	0	14	80	
Zinc	ppm	ASTM D5185m	0	8	3	
Sulfur	ppm	ASTM D5185m	0	283	9049	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon		ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m	>25	2	2	
	ppm		- 20	_	2	
Potassium	ppm	ASTM D5185m	>20	5		
Water ppm Water	% ppm	ASTM D6304 ASTM D6304	>2.26 >22600	0.961 9610	△ 0.959 △ 9590	
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm	-200	ASTM D7647	>10000	6223		
Particles >6µm		ASTM D7647	>2500	1847		
Particles >14um		ASTM D7647	>320	88		
Particles >14µm		ASTM D7647	>80	17		
•		ASTM D7647	>20	0		
Particles >38μm Particles >71μm				0		
		ASTM D7647				
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/18/14		
FLUID DEGRAD	NOITE	method	limit/base	current	history1	history2
Agid Number /ANI	ma 1/011/-	VCTM DOUVE		0.00	0.00	

Acid Number (AN)


mg KOH/g ASTM D8045

0.82

0.09



## OIL ANALYSIS REPORT

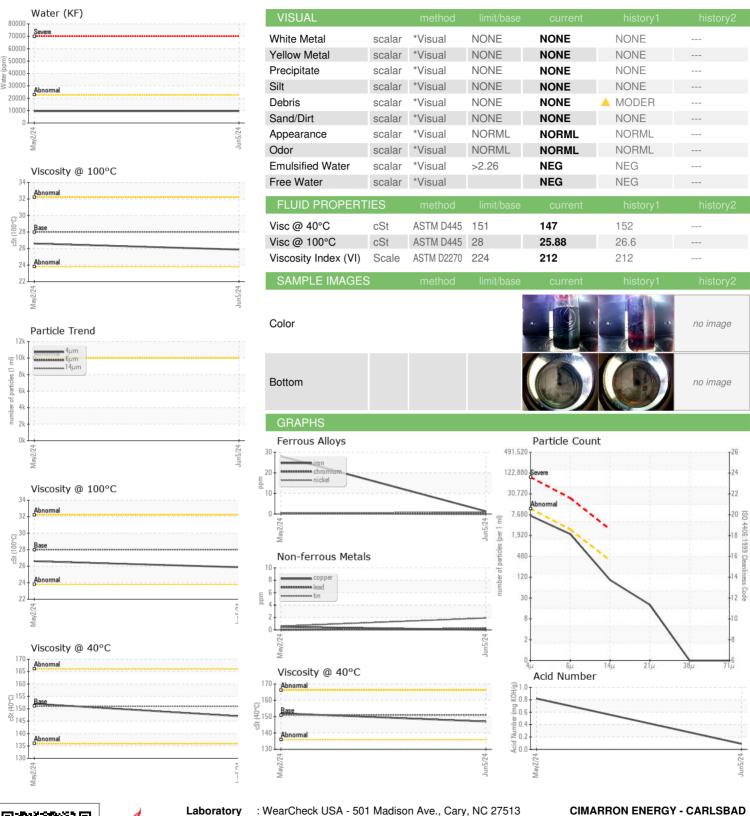





Certificate 12367

Laboratory Sample No.

: TO90004077 Lab Number : 06205578

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** Unique Number : 11073039

: 17 Jun 2024 Diagnosed : 18 Jun 2024 - Jonathan Hester

: 10 Jun 2024

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

cleal@cimarron.com

4425 GRANDI RD, UNIT F

Contact: CARLOS LEAL

CARLSBAD, NM

UM 88220-8923

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CIMCAR [WUSCAR] 06205578 (Generated: 06/22/2024 14:46:07) Rev: 1

Contact/Location: CARLOS LEAL - CIMCAR

T:

F: