



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
79-107
 Component
Rear Left Final Drive
 Fluid
TO-4 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number | Client Info | | | WC0920966 | --- | --- |
| Sample Date | Client Info | | | 18 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 2654 | --- | --- |
| Oil Age | hrs | Client Info | | 517 | --- | --- |
| Oil Changed | Client Info | | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | --- | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >500 | 730 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 8 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 11 | --- | --- |
| Lead | ppm | ASTM D5185m | >25 | 2 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | 3 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | --- | --- |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 24 | --- | --- |
| Barium | ppm | ASTM D5185m | | 26 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | <1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 6 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 7 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 68 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 630 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 43 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 19702 | --- | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >75 | 67 | --- | --- |
| Sodium | ppm | ASTM D5185m | | 2 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 7 | --- | --- |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |



OIL ANALYSIS REPORT






| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 87.4 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | | |
|--------|--|--|--|----------|----------|----------|
| Color | | | | no image | no image | no image |
| Bottom | | | | no image | no image | no image |

GRAPHS

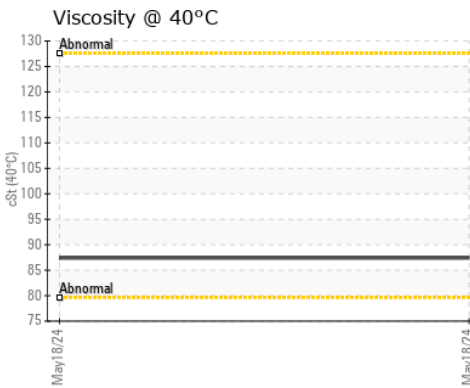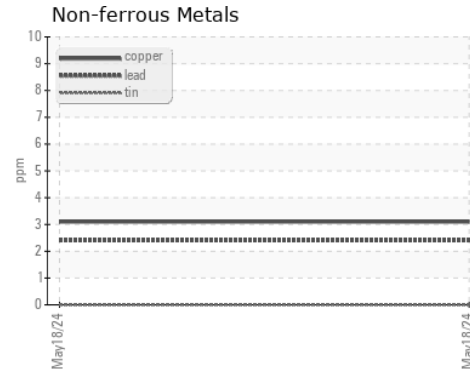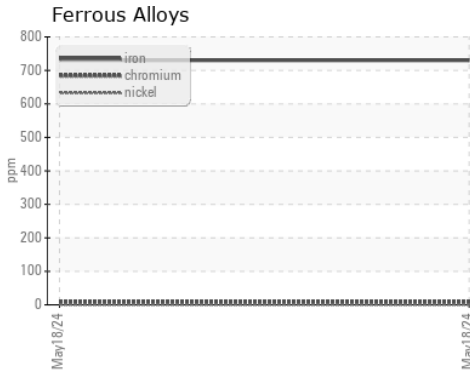

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0920966 **Received** : 10 Jun 2024
Lab Number : **06205764** **Tested** : 13 Jun 2024
Unique Number : 11073225 **Diagnosed** : 13 Jun 2024 - Angela Borella
Test Package : FLEET

NANA LYNDEN LOGISTICS
 P.O. BOX 570
 KOTZEBUE, AK
 US 99752
 Contact: Mark Tatlow
 nanalynden@lynden.com
 T: (907)754-5551
 F: (800)418-0974

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)