




OIL ANALYSIS REPORT

Area
CRANE - T LANGE
 Machine Id
T LANGE MAIN ENGINE
 Component
Main Engine
 Fluid
CHEVRON DELO 400 LE 15W40 (--- GAL)

Sample Rating Trend

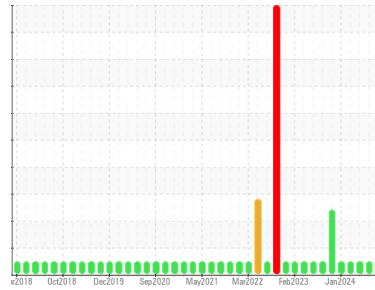

NORMAL

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0922385	WC0892640	WC0892643
Sample Date	Client Info			31 May 2024	16 Apr 2024	18 Mar 2024
Machine Age	hrs	Client Info		37245	36508	36090
Oil Age	hrs	Client Info		500	500	0
Oil Changed	Client Info			Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Water	WC Method	>0.1		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	5	4	3
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	3	3	4
Lead	ppm	ASTM D5185m	>18	3	0	2
Copper	ppm	ASTM D5185m	>80	3	2	3
Tin	ppm	ASTM D5185m	>14	<1	<1	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		352	444	325
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		129	127	120
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		702	699	631
Calcium	ppm	ASTM D5185m		1661	1610	1535
Phosphorus	ppm	ASTM D5185m	1200	751	748	716
Zinc	ppm	ASTM D5185m	1300	904	872	850
Sulfur	ppm	ASTM D5185m	3200	2923	2969	2757




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6	6	6
Sodium	ppm	ASTM D5185m	>75	2	2	2
Potassium	ppm	ASTM D5185m	>20	1	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.4	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.9	6.4	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	22.3	22.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	16.6	16.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	8.9	9.4	9.3







OIL ANALYSIS REPORT

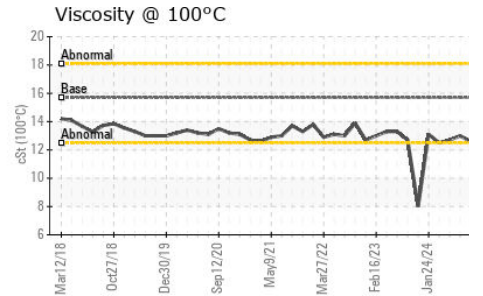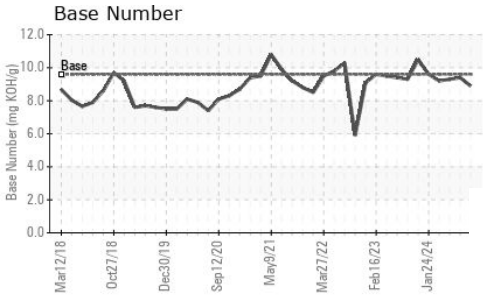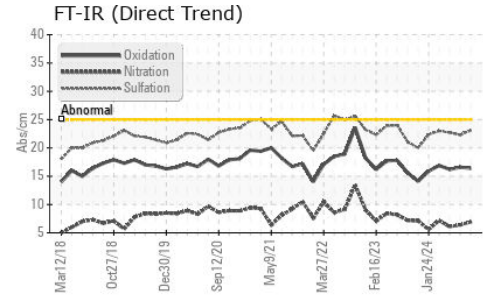

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	12.6	13.0	12.7

GRAPHS

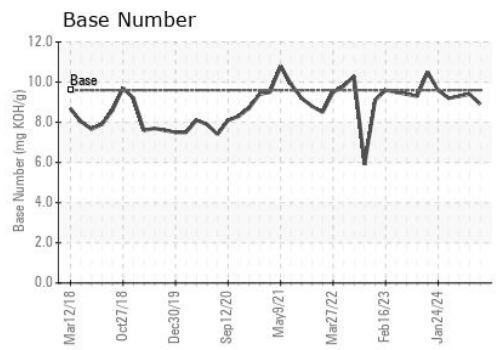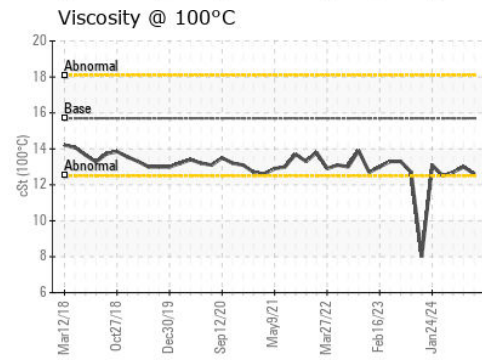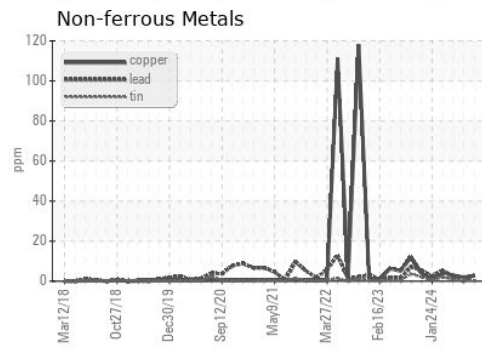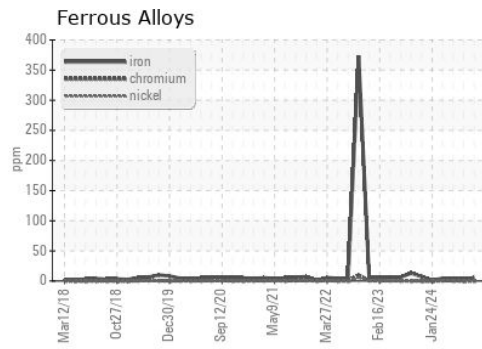

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0922385 **Received** : 10 Jun 2024
Lab Number : **06205916** **Tested** : 12 Jun 2024
Unique Number : 11073377 **Diagnosed** : 12 Jun 2024 - Wes Davis
Test Package : FLEET

ASSOCIATED TERMINALS - CRANE
 CONVENT, LA
 US 70723
 Contact: GREG JOSEY
 gjosey@associatedterminals.com
 T:
 F: (225)562-3515

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)