



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**KENWORTH DT-05 T880**  
 Component  
**1 Diesel Engine**  
 Fluid  
**SHELL ROTELLA T3 15W40 (42 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number      | Client Info |             |            | <b>PE0003317</b>   | ---      | ---      |
| Sample Date        | Client Info |             |            | <b>11 Mar 2024</b> | ---      | ---      |
| Machine Age        | mls         | Client Info |            | <b>99327</b>       | ---      | ---      |
| Oil Age            | mls         | Client Info |            | <b>10180</b>       | ---      | ---      |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | ---      | ---      |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ---      | ---      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >3.0   |            | <b>&lt;1.0</b> | ---      | ---      |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | ---      | ---      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | ---      | ---      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >90        | <b>18</b>    | ---      | ---      |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | ---      | ---      |
| Nickel      | ppm | ASTM D5185m | >2         | <b>0</b>     | ---      | ---      |
| Titanium    | ppm | ASTM D5185m | >2         | <b>61</b>    | ---      | ---      |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | ---      | ---      |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>8</b>     | ---      | ---      |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | ---      | ---      |
| Copper      | ppm | ASTM D5185m | >330       | <b>&lt;1</b> | ---      | ---      |
| Tin         | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | ---      | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | ---      | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>&lt;1</b> | ---      | ---      |




| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 10         | <b>105</b>   | ---      | ---      |
| Barium     | ppm | ASTM D5185m | 0          | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm | ASTM D5185m | 10         | <b>22</b>    | ---      | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm | ASTM D5185m | 10         | <b>360</b>   | ---      | ---      |
| Calcium    | ppm | ASTM D5185m | 2600       | <b>1774</b>  | ---      | ---      |
| Phosphorus | ppm | ASTM D5185m | 1050       | <b>954</b>   | ---      | ---      |
| Zinc       | ppm | ASTM D5185m | 1250       | <b>1213</b>  | ---      | ---      |
| Sulfur     | ppm | ASTM D5185m | 3900       | <b>3980</b>  | ---      | ---      |

| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>7</b>  | ---      | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>2</b>  | ---      | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>26</b> | ---      | ---      |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >6         | <b>0.4</b>  | ---      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>10.2</b> | ---      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>21.5</b> | ---      | ---      |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>15.8</b> | ---      | ---      |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 10.6       | <b>6.8</b>  | ---      | ---      |





# OIL ANALYSIS REPORT

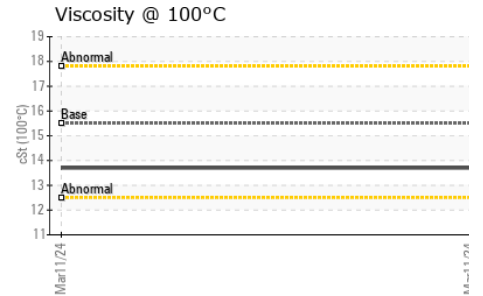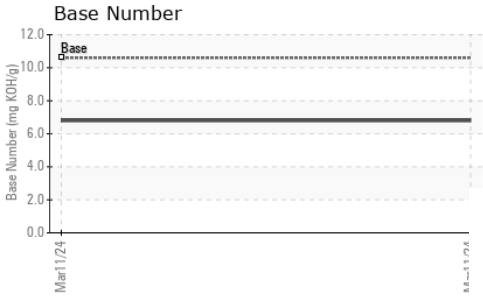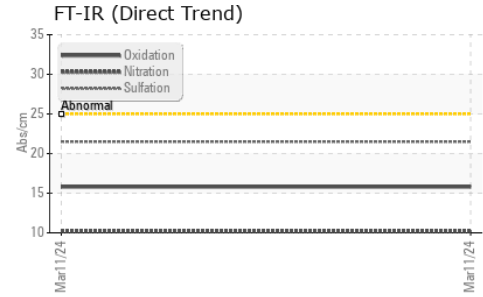

| VISUAL           | method | limit/base | current | history1     | history2 |     |
|------------------|--------|------------|---------|--------------|----------|-----|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | ---      | --- |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | ---      | --- |
| Emulsified Water | scalar | *Visual    | >0.2    | <b>NEG</b>   | ---      | --- |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | ---      | --- |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |     |
|------------------|--------|------------|---------|-------------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.5    | <b>13.7</b> | ---      | --- |

## GRAPHS

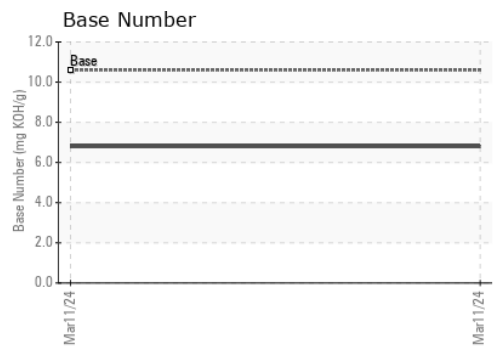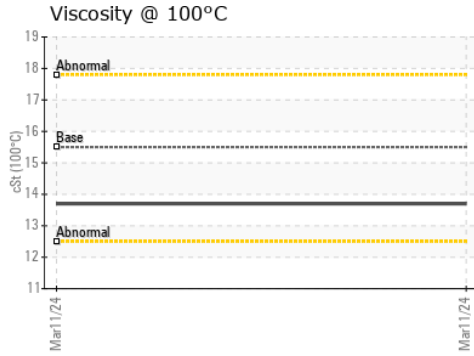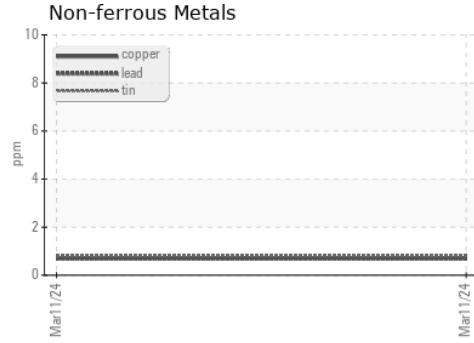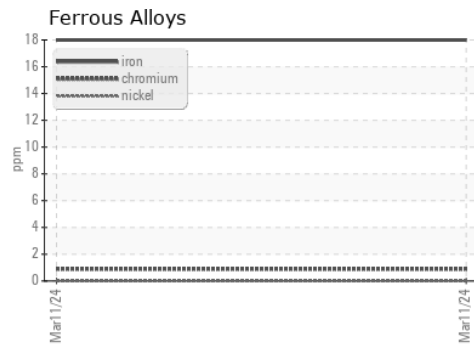

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0003317      **Received** : 11 Jun 2024  
**Lab Number** : **06206243**      **Tested** : 13 Jun 2024  
**Unique Number** : 11073704      **Diagnosed** : 13 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN )

**HOFFMAN CONSTRUCTION**  
 159 16TH ST E SUITE 101  
 PACIFIC, WA  
 US 98047  
 Contact: LUKE HUIZENGA  
 luke@hofcon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)