




# OIL ANALYSIS REPORT

## Sample Rating Trend

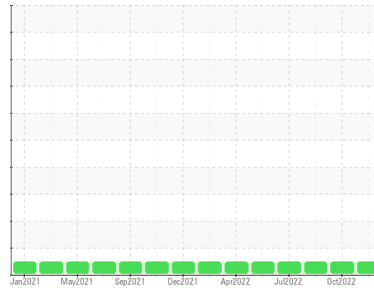

**NORMAL**



Machine Id  
**SALVAGNINI SALVAGNINI 2**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>PTK0005488</b>  | PTK0003749  | PTK0003733  |
| Sample Date        | Client Info |             |            | <b>17 Apr 2024</b> | 18 Oct 2022 | 23 Aug 2022 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.1       | <b>NEG</b> | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current  | history1 | history2 |
|-------------|-----|-------------|------------|----------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>0</b> | 0        | 0        |
| Chromium    | ppm | ASTM D5185m | >10        | <b>0</b> | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >10        | <b>0</b> | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Silver      | ppm | ASTM D5185m |            | <b>0</b> | 0        | <1       |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>0</b> | 0        | <1       |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b> | 0        | 0        |
| Copper      | ppm | ASTM D5185m | >75        | <b>1</b> | 20       | 20       |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b> | 0        | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |





| ADDITIVES  |     | method      | limit/base | current     | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 5          | <b>0</b>    | 0        | 0        |
| Barium     | ppm | ASTM D5185m | 5          | <b>0</b>    | 0        | 2        |
| Molybdenum | ppm | ASTM D5185m | 5          | <b>0</b>    | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>    | 0        | 0        |
| Magnesium  | ppm | ASTM D5185m | 25         | <b>0</b>    | 0        | <1       |
| Calcium    | ppm | ASTM D5185m | 200        | <b>107</b>  | 59       | 57       |
| Phosphorus | ppm | ASTM D5185m | 300        | <b>1156</b> | 308      | 308      |
| Zinc       | ppm | ASTM D5185m | 370        | <b>622</b>  | 511      | 491      |
| Sulfur     | ppm | ASTM D5185m | 2500       | <b>3214</b> | 948      | 915      |

| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >20        | <b>1</b> | 0        | <1       |
| Sodium       | ppm | ASTM D5185m |            | <b>1</b> | 0        | 0        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | 1        | <1       |

| FLUID CLEANLINESS |  | method       | limit/base | current        | history1 | history2 |
|-------------------|--|--------------|------------|----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   | >5000      | <b>283</b>     | 1148     | 469      |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>70</b>      | 274      | 124      |
| Particles >14µm   |  | ASTM D7647   | >160       | <b>4</b>       | 16       | 13       |
| Particles >21µm   |  | ASTM D7647   | >40        | <b>1</b>       | 3        | 2        |
| Particles >38µm   |  | ASTM D7647   | >10        | <b>0</b>       | 0        | 0        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>       | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >19/17/14  | <b>15/13/9</b> | 17/15/11 | 16/14/11 |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.57       | <b>0.77</b> | 0.42     | 0.48     |

# OIL ANALYSIS REPORT

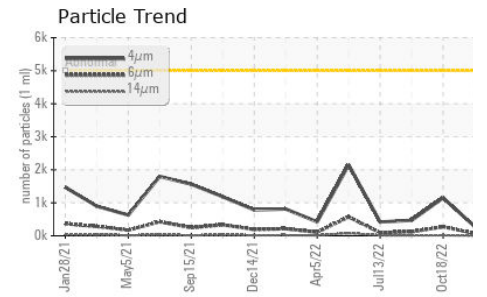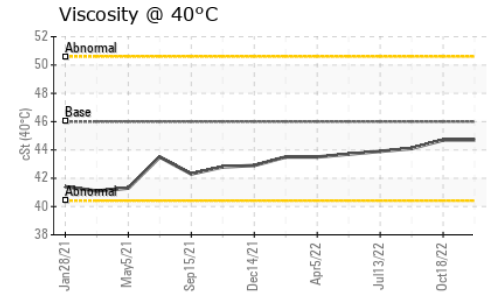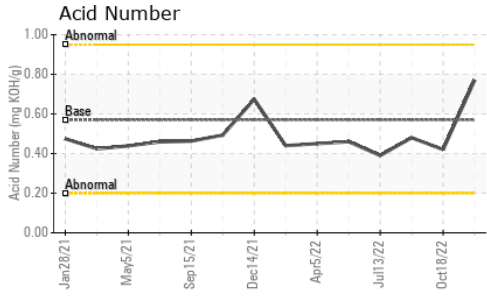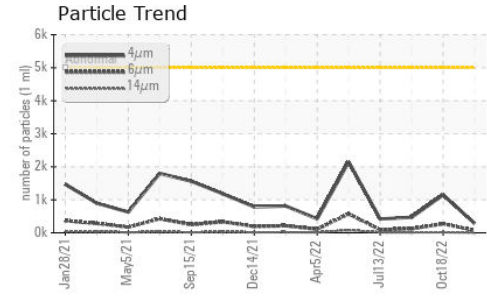

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 46 | 44.7    | 44.7     | 44.1     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         |          |          |
| Bottom        |        |            |         |          |          |

### GRAPHS



**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PTK0005488      **Received** : 11 Jun 2024  
**Lab Number** : 06206446      **Tested** : 13 Jun 2024  
**Unique Number** : 11073907      **Diagnosed** : 13 Jun 2024 - Don Baldrige  
**Test Package** : MOB 2

**APG CASH DRAWER**  
 5250 INDUSTRIAL BLVD NE  
 FRIDLEY, MN  
 US 55421  
 Contact: JARRETT BUCKHOLZ  
 jarrett.buckholz@us.cashdrawer.com  
 T: (763)571-5000  
 F: (763)571-5771

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)