

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO



Machine Id CATERPILLAR 962G 7BW00347 Component Hydraulic System

Fluid {not provided} (--- GAL

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


|                                     |               |              |             | 1                 |          |          |
|-------------------------------------|---------------|--------------|-------------|-------------------|----------|----------|
| -)                                  |               | L            |             | May2024           |          |          |
| SAMPLE INFORM                       | <b>MATION</b> | method       | limit/base  | current           | history1 | history2 |
| Sample Number                       |               | Client Info  |             | PTK0005343        |          |          |
| Sample Date                         |               | Client Info  |             | 10 May 2024       |          |          |
| Machine Age                         | hrs           | Client Info  |             | 0                 |          |          |
| Oil Age                             | hrs           | Client Info  |             | 0                 |          |          |
| Oil Changed                         |               | Client Info  |             | N/A               |          |          |
| Sample Status                       |               |              |             | ABNORMAL          |          |          |
| CONTAMINATIO                        | N             | method       | limit/base  | current           | history1 | history2 |
| Water                               |               | WC Method    | >0.1        | NEG               |          |          |
| WEAR METALS                         |               | method       | limit/base  | current           | history1 | history2 |
| Iron                                | ppm           | ASTM D5185m  | >20         | 4                 |          |          |
| Chromium                            | ppm           | ASTM D5185m  |             | 1                 |          |          |
| Nickel                              | ppm           |              | >10         | 0                 |          |          |
| Titanium                            | ppm           | ASTM D5185m  | -           | ۰<br><1           |          |          |
| Silver                              | ppm           | ASTM D5185m  |             | 0                 |          |          |
| Aluminum                            | ppm           | ASTM D5185m  | >10         | <1                |          |          |
| Lead                                | ppm           | ASTM D5185m  | >10         | 0                 |          |          |
| Copper                              | ppm           | ASTM D5185m  | >75         | <1                |          |          |
| Tin                                 | ppm           |              | >10         | 0                 |          |          |
| Vanadium                            | ppm           | ASTM D5185m  | 210         | 0                 |          |          |
| Cadmium                             | ppm           | ASTM D5185m  |             | 0                 |          |          |
| ADDITIVES                           |               | method       | limit/base  | current           | history1 | history2 |
| Boron                               | ppm           | ASTM D5185m  |             | 0                 |          |          |
| Barium                              | ppm           | ASTM D5185m  |             | 0                 |          |          |
| Volybdenum                          | ppm           | ASTM D5185m  |             | 1                 |          |          |
| Manganese                           | ppm           | ASTM D5185m  |             | 0                 |          |          |
| Magnesium                           | ppm           | ASTM D5185m  |             | 10                |          |          |
| Calcium                             | ppm           | ASTM D5185m  |             | 561               |          |          |
| Phosphorus                          |               | ASTM D5185m  |             | 678               |          |          |
| Zinc                                | ppm<br>ppm    | ASTM D5185m  |             | 821               |          |          |
| Sulfur                              | ppm           | ASTM D5185m  |             | 2164              |          |          |
|                                     |               |              | lipsit//see | -                 |          |          |
|                                     |               | method       | limit/base  | current           | history1 | history2 |
| Silicon                             | ppm           | ASTM D5185m  | >20         | 3                 |          |          |
| Sodium<br>Potassium                 | ppm           | ASTM D5185m  | > 20        | 2                 |          |          |
|                                     | ppm           | ASTM D5185m  |             | 0                 |          |          |
| FLUID CLEANLIN                      | IESS          | method       | limit/base  | current           | history1 | history2 |
| Particles >4µm                      |               | ASTM D7647   | >5000       | A 12711           |          |          |
| Particles >6µm                      |               | ASTM D7647   |             | 546               |          |          |
| Particles >14µm                     |               | ASTM D7647   | >160        | 19                |          |          |
| Particles >21µm                     |               | ASTM D7647   |             | 2                 |          |          |
| Particles >38µm                     |               | ASTM D7647   | >10         | 0                 |          |          |
| Particles >71µm                     |               | ASTM D7647   |             | 0                 |          |          |
| Oil Cleanliness                     |               | ISO 4406 (c) | >19/17/14   | <b>A</b> 21/16/11 |          |          |
| FLUID DEGRADA                       | TION          | method       | limit/base  | current           | history1 | history2 |
| Acid Number (AN)                    | mg KOH/g      | ASTM D8045   |             | 0.54              |          |          |
| Acid Number (AN)<br>8:23:34) Rev: 1 |               |              |             | 0.54              |          |          |

Report Id: CEMMEN [WUSCAR] 06206450 (Generated: 06/13/2024 08:23:34) Rev: 1

Contact/Location: JIM DEWALL - CEMMEN Page 1 of 2



# **OIL ANALYSIS REPORT**

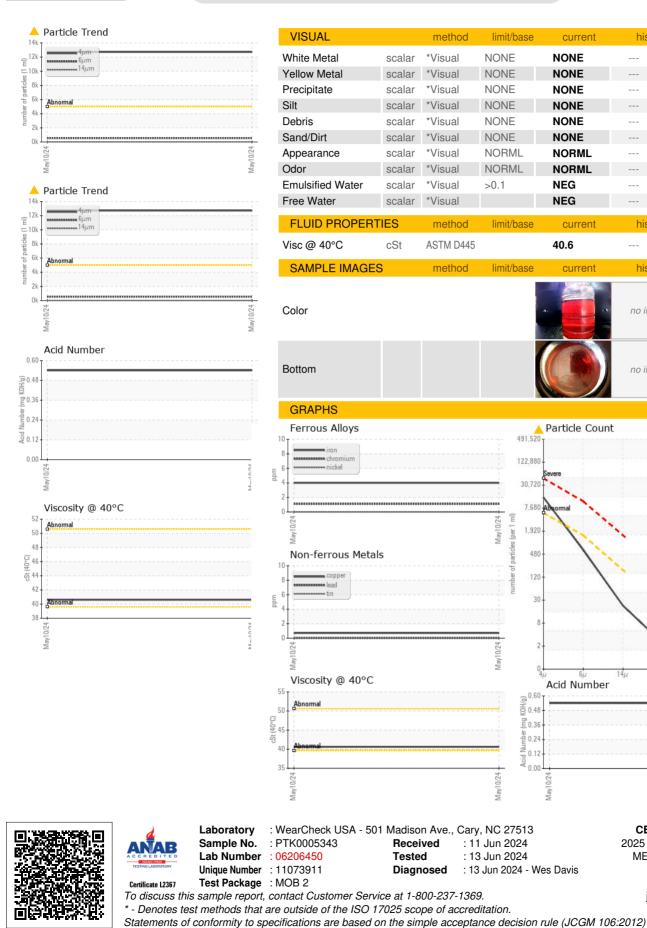

**CEMSTONE PRODUCTS** 2025 LONTRO POINT BLVD MENDOTA HEIGHTS, MN US 55120 Contact: JIM DEWALL jdewall@cemstone.com T: F:

Report Id: CEMMEN [WUSCAR] 06206450 (Generated: 06/13/2024 08:23:35) Rev: 1

Contact/Location: JIM DEWALL - CEMMEN

214

history1

history

history1

no image

no image

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

current

current

Particle Count

Acid Number

Vav

NEG

NEG

40.6

history2

history

history2

no image

no imade

4406

:1999 Cle

14