

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7766052 (S/N 1126) Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017786	KCP52671	KCP33047
Sample Date		Client Info		22 May 2024	13 Dec 2022	24 May 2022
Machine Age	hrs	Client Info		9652	5618	3366
Oil Age	hrs	Client Info		6286	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	1	2	<1
Lead	ppm	ASTM D5185m	>10	0	1	0
Copper	ppm	ASTM D5185m	>50	10	4	2
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	1	28	39
Calcium	ppm	ASTM D5185m	2	0	1	<1
Phosphorus	ppm	ASTM D5185m		<1	1	5
Zinc	ppm	ASTM D5185m		17	0	4
Sulfur	ppm	ASTM D5185m		20117	20223	17354
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	3	0
Sodium	ppm	ASTM D5185m		2	16	13
Potassium	ppm	ASTM D5185m	>20	0	10	12
Water	%	ASTM D6304	>0.05	0.007	0 .185	0.023
ppm Water	ppm	ASTM D6304	>500	78	1 850	234.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		476	724	1366
Particles >6µm		ASTM D7647	>1300	169	162	539
Particles >14µm		ASTM D7647	>80	24	9	1 43
		ASTM D7647	>20	7	2	37
Particles >21µm		A31W D7047				
Particles >38µm		ASTM D7647	>4	0	0	2
Particles >38µm Particles >71µm			>4		0 0	0
Particles >38µm		ASTM D7647	>4	0	0	
Particles >38µm Particles >71µm	TION	ASTM D7647 ASTM D7647	>4 >3	0 0	0 0	0

Contact/Location: Service Manager - MERCONAR Page 1 of 2



١

Å

12000

10000

8000

6000 Water

4000

2000

Ē of particles (1 m 1k

> 0 0 Ok CUTCON

200

52 50

48

() 0€046 Bas

لكي 44

47

38 May24/22

Ē

of particles (1 r

0

0

Mav24/22

Abno 40

Particle Trend

12/12/17/

Viscosity @ 40°C

ول ا Mav24/77

Ρ

OIL ANALYSIS REPORT

method

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML


>0.05

46

*Visual

ASTM D445

Water (KF)			VISUAL	
Severe			White Metal	scalar
			Yellow Metal	scalar
			Precipitate	scalar
			Silt	scalar
			Debris	scalar
Abnormal			Sand/Dirt	scalar
77 (1-7	Dec13/22	May22/24	Appearance	scalar
мау	Dec	May	Odor	scalar
Particle Trend			Emulsified Water	scalar
	·····		Free Water	scalar
 			FLUID PROPER	TIES
			Visc @ 40°C	cSt
			SAMPLE IMAGE	S
	Dec13/22	Ma/22/24	Color	
Water (KF)				
Severe			Bottom	

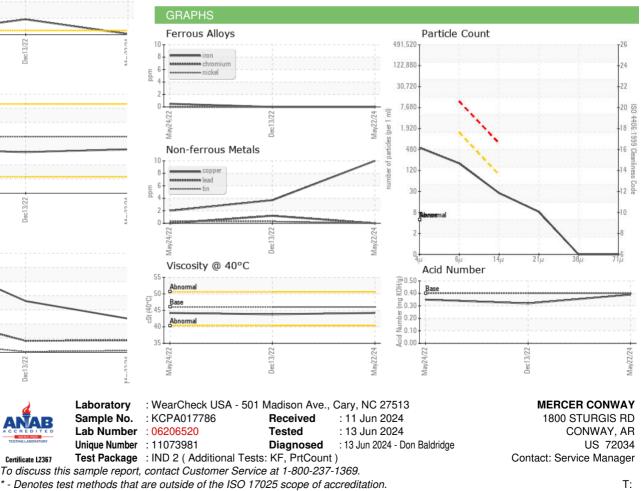

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

Certificate 12367

Dec13/22

Jec13/22

Contact/Location: Service Manager - MERCONAR

NONE

NONE

NONE

NONE

LIGHT

NONE

HAZY

0.2%

NEG

43.8

NORM

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

44.2

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

44.2