

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER BSD50 7347789 (S/N 1018)

Component Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015000	KCP48240	
Sample Date		Client Info		09 May 2024	05 Oct 2022	
Machine Age	hrs	Client Info		6646	3171	
Oil Age	hrs	Client Info		3000	3171	
Oil Changed		Client Info		Not Changd	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	<1	
Lead		ASTM D5185m	>10	0	0	
	ppm	ASTM D5185m	>50	3	6	
Copper Tin	ppm	ASTM D5185m	>10		0	
	ppm		>10	0		
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	14	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	100	40	11	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	1	3	
Zinc	ppm	ASTM D5185m	0	12	8	
Sulfur	ppm	ASTM D5185m	23500	21312	21774	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		13	<1	
Potassium	ppm	ASTM D5185m	>20	3	0	
Water	%	ASTM D6304	>0.05	0.007	0.010	
ppm Water	ppm	ASTM D6304	>500	75	104.7	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9317	7154	
Particles >6µm		ASTM D7647	>1300	<u> </u>	A 2749	
Particles >14µm		ASTM D7647	>80	<u> </u>	75	
Particles >21µm		ASTM D7647		A 32	12	
Particles >38µm		ASTM D7647	>4	1	0	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	▲ 20/19/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)						
ACID NUMBER (AN)	mg KOH/g	ASTM D8045	1.0	0.44	0.40	




OIL ANALYSIS REPORT

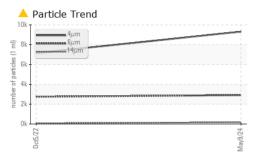



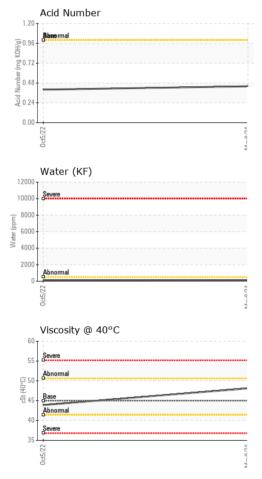

Certificate 12367

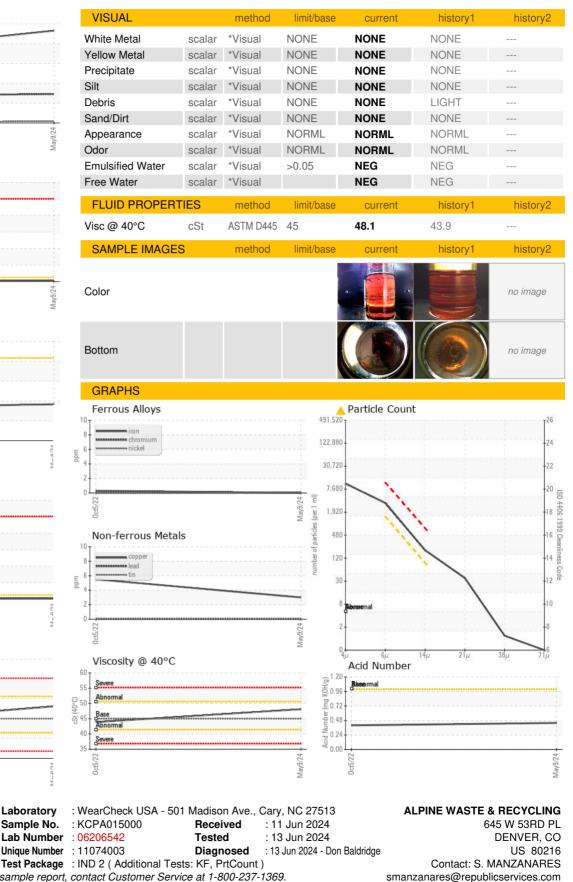

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ALPDEN [WUSCAR] 06206542 (Generated: 06/13/2024 19:15:14) Rev: 1

Laboratory

Sample No.

Lab Number

Contact/Location: S. MANZANARES - ALPDEN

T:

F: