




OIL ANALYSIS REPORT

Sample Rating Trend

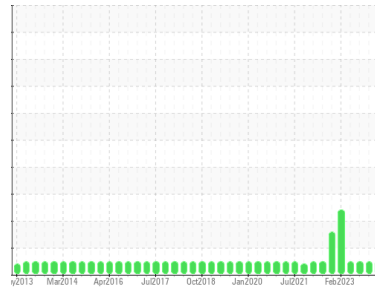

NORMAL



Machine Id
QSI 750 QUINCY (S/N 96823H)
 Component
Compressor
 Fluid
PETRO CANADA PURITY FG COMPRESSOR 46 (30 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		USP0013436	USP244641	USP248850
Sample Date	Client Info		24 Mar 2024	28 Sep 2023	17 Jun 2023
Machine Age	hrs	Client Info	20331	0	17842
Oil Age	hrs	Client Info	2235	950	2872
Oil Changed		Client Info	N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	11	8	6
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m	0	0	0
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	2	<1
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >50	1	<1	2
Tin	ppm	ASTM D5185m >15	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	<1	0	2
Calcium	ppm	ASTM D5185m	0	0	0
Phosphorus	ppm	ASTM D5185m	603	621	614
Zinc	ppm	ASTM D5185m	83	102	74
Sulfur	ppm	ASTM D5185m	1533	1550	1548

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	1	1
Sodium	ppm	ASTM D5185m	0	1	2
Potassium	ppm	ASTM D5185m >20	<1	0	0
Water	%	ASTM D6304 >0.1	0.003	0.013	0.003
ppm Water	ppm	ASTM D6304 >1000	29	137.6	39.2

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1620	1233	2036
Particles >6µm	ASTM D7647 >2500		578	403	354
Particles >14µm	ASTM D7647 >320		92	42	18
Particles >21µm	ASTM D7647 >80		24	10	3
Particles >38µm	ASTM D7647 >20		1	1	0
Particles >71µm	ASTM D7647 >4		0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/15	18/16/14	17/16/13	18/16/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.37	0.26	0.26	0.25




OIL ANALYSIS REPORT

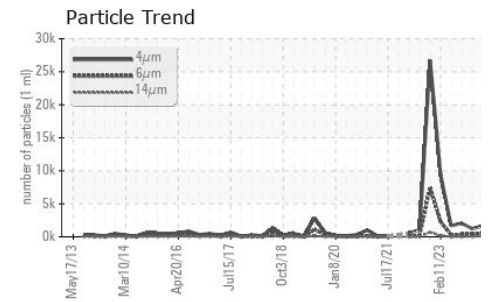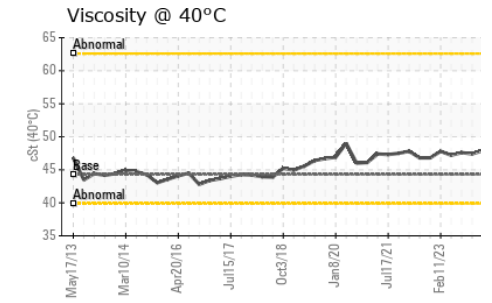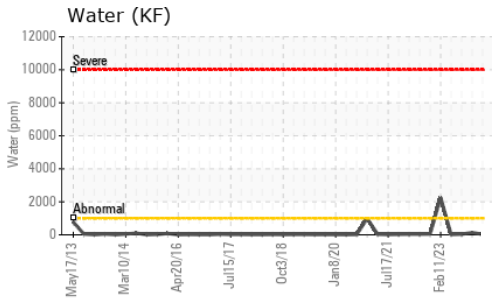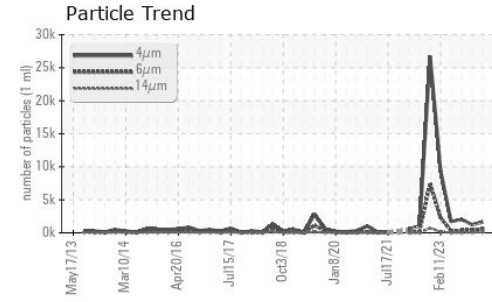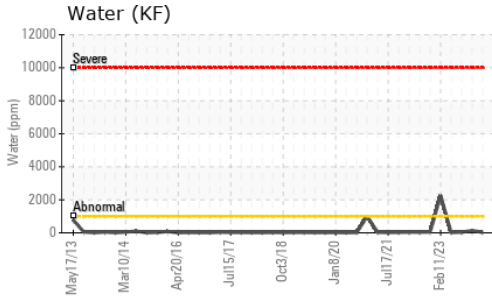






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.3	47.9	47.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

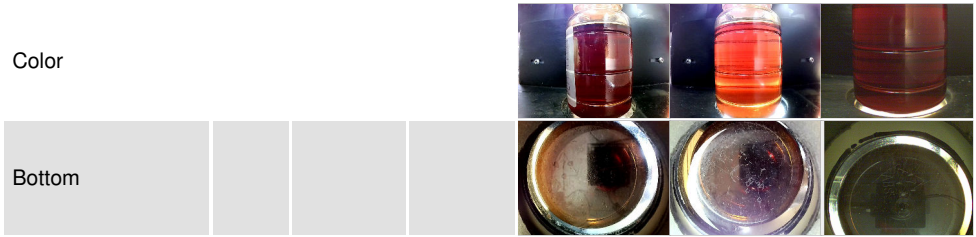

GRAPHS

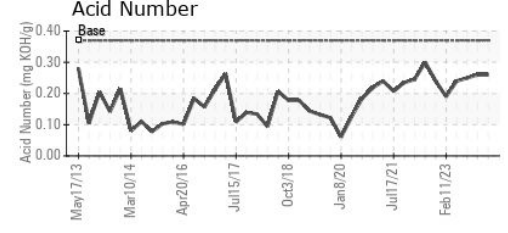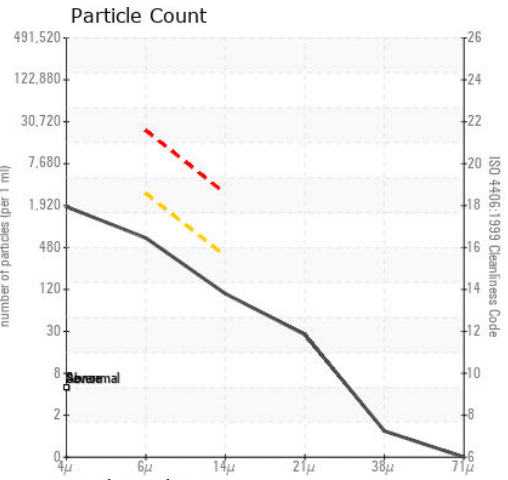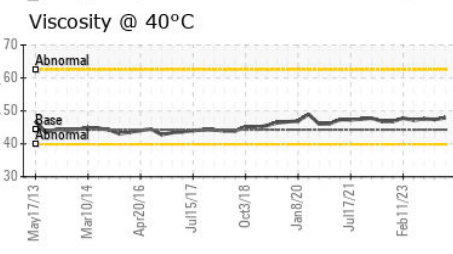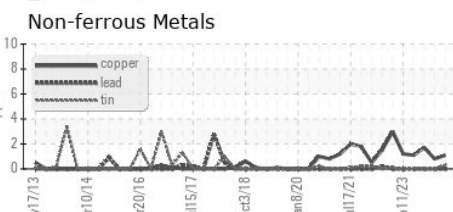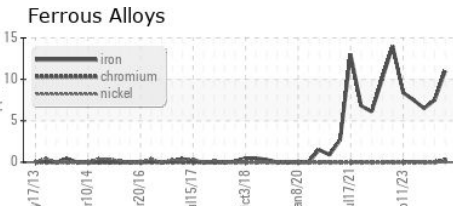

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP0013436
Lab Number : 06206570
Unique Number : 11074031
Test Package : IND 2
Received : 11 Jun 2024
Tested : 14 Jun 2024
Diagnosed : 14 Jun 2024 - Doug Bogart

MCCAIN FOODS - RICE LAKE
 100 W. COLEMAN ST.
 RICE LAKE, WI
 US 54868
 Contact: JOSH MILLER
 josh.miller@mccain.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)