




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR D10T 15105048 (S/N CCAT0D10THRJG01478)
 Component
Right Final Drive
 Fluid
CHEVRON 50WT (--- GAL)

Sample Rating Trend

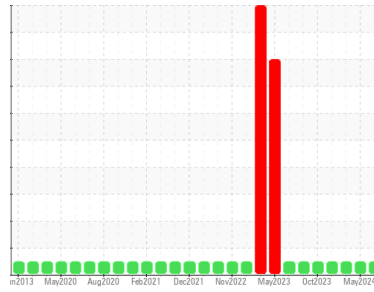

NORMAL



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear
 All component wear rates are normal.

Contamination
 The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0040754	RP0036871	RP0036206
Sample Date	Client Info		04 Jun 2024	07 May 2024	19 Dec 2023
Machine Age	hrs	Client Info	71327	70999	70375
Oil Age	hrs	Client Info	328	565	1713
Oil Changed	Client Info		Not Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	31	213	35
Chromium	ppm	ASTM D5185m >10	<1	4	<1
Nickel	ppm	ASTM D5185m >5	0	<1	0
Titanium	ppm	ASTM D5185m >15	<1	1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >75	2	9	<1
Lead	ppm	ASTM D5185m >10	0	<1	0
Copper	ppm	ASTM D5185m >75	<1	2	<1
Tin	ppm	ASTM D5185m >8	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	<1	<1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	3	3	3
Manganese	ppm	ASTM D5185m	<1	3	<1
Magnesium	ppm	ASTM D5185m	18	21	18
Calcium	ppm	ASTM D5185m	3499	3014	3262
Phosphorus	ppm	ASTM D5185m	878	1123	858
Zinc	ppm	ASTM D5185m	1119	1274	1079

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	17	17	15
Sodium	ppm	ASTM D5185m	5	16	3
Potassium	ppm	ASTM D5185m >20	2	3	0
Water	%	ASTM D6304 >0.2	0.036	0.057	0.033
ppm Water	ppm	ASTM D6304 >2000	361	573	332




FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.03	1.57	0.91

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

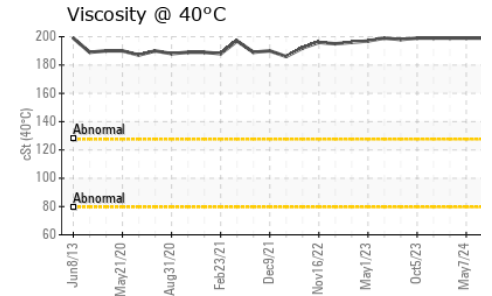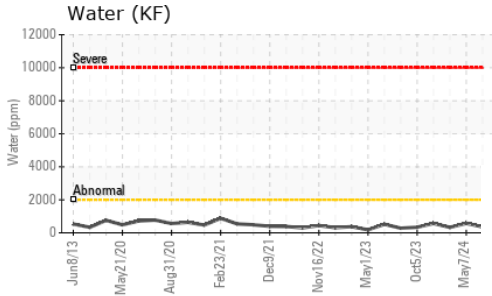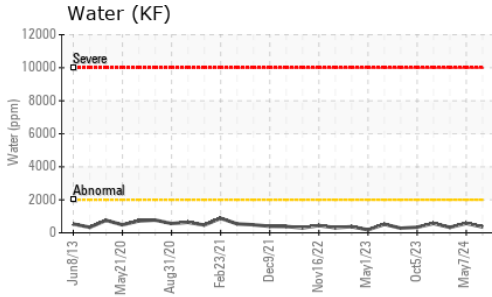

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	199	199	199

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------





Color



Bottom



GRAPHS

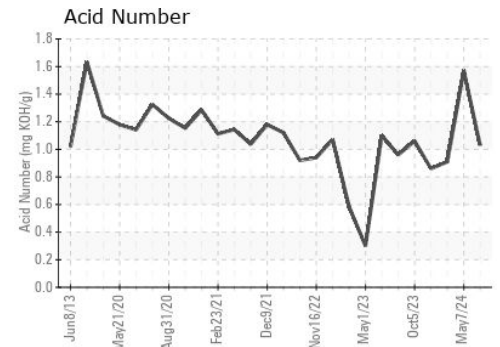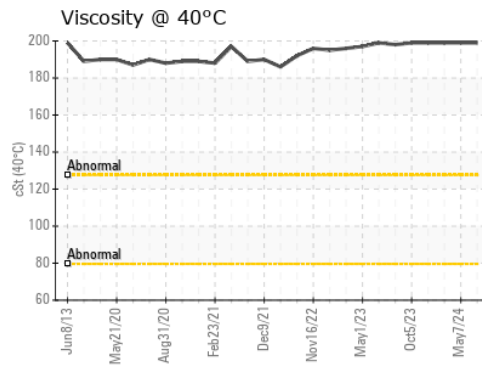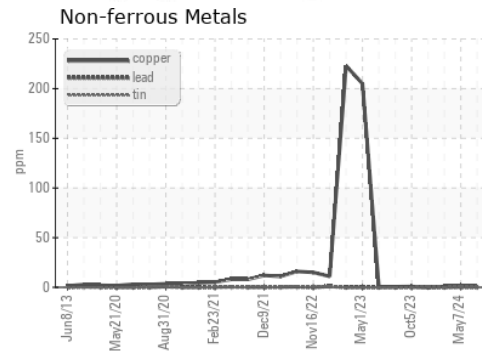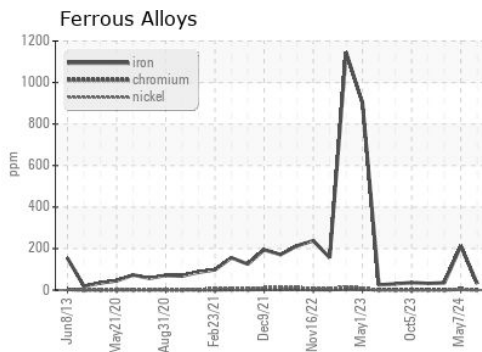

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0040754
Lab Number : 06206621
Unique Number : 11074082
Test Package : IND 2

Received : 11 Jun 2024
Tested : 13 Jun 2024
Diagnosed : 13 Jun 2024 - Wes Davis

NRG TEXAS LLC
 3784 FM 39 SOUTH
 JEWETT, TX
 US 75846

Contact: JURGEN THOMPSON
 JThompson@ecomaterial.com

T: (903)626-9528
 F: (903)626-9772

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)