

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Hydraulic System Fluid CASTROL BRAYCO MICRONIC 756 5606 (--- GAL)

DIAGNOSIS

Area HPU30 Machine Id

HTS41

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0896093	WC0896074	WC0896046	
Sample Date		Client Info		10 Jun 2024	06 May 2024	08 Apr 2024	
Machine Age	mths	Client Info		0	0	0	
Oil Age	mths	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				ATTENTION	ATTENTION	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	0	0	0	
Chromium	ppm	ASTM D5185m	>20	<1	0	0	
Nickel	ppm	ASTM D5185m	>20	0	0	0	
Titanium	ppm	ASTM D5185m		<1	0	0	
Silver	ppm	ASTM D5185m		0	0	0	
Aluminum	ppm	ASTM D5185m	>20	2	0	0	
Lead	ppm	ASTM D5185m	>20	0	0	0	
Copper	ppm		>20	<1	0	0	
Tin	ppm	ASTM D5185m	>20	<1	0	0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	<1	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m		<1	<1	0	
Calcium	ppm	ASTM D5185m		0	0	0	
Phosphorus	ppm	ASTM D5185m		375	419	779	
Zinc	ppm	ASTM D5185m		1	0	0	
Sulfur	ppm	ASTM D5185m		57	0	0	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<1	0	<1	
Sodium	ppm	ASTM D5185m		0	1	<1	
Potassium	ppm	ASTM D5185m	>20	<1	0	0	
Water	%	ASTM D6304	>0.05	0.002	0.003	0.005	
ppm Water	ppm	ASTM D6304	>500	19	39	52	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>640	931	1120	1 681	
Particles >6µm		ASTM D7647	>160	<mark>)</mark> 238	118	212	
Particles >14µm		ASTM D7647	>20	e 23	7	11	
Particles >21µm		ASTM D7647	>4	4	2	3	
Particles >38µm		ASTM D7647	>3	0	0	0	
						0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Particles >71µm Oil Cleanliness		ASTM D7647 ISO 4406 (c)	>3 >16/14/11	0 	0	0	
	TION						





OIL ANALYSIS REPORT













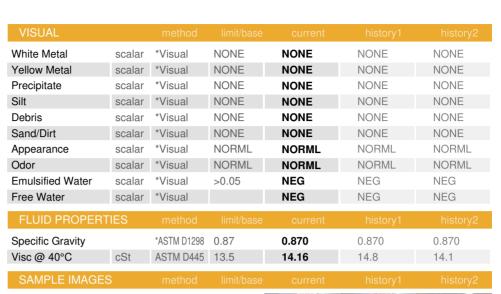



Bottom

Color

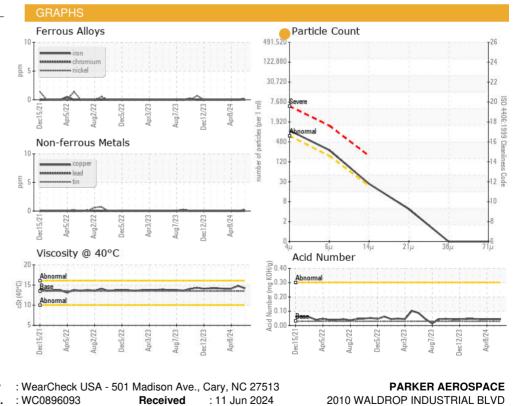



d	Laboratory	ooratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513						
	Sample No.	: WC0896093	Received	: 11 Jun 2024	2010 WAL			
ACCREDITED	Lab Number	: 06207016	Tested	: 17 Jun 2024				
TESTING LABORATORY	Unique Number	: 11074477	Diagnosed	: 18 Jun 2024 - Angela Borella	ı			
Certificate L2367 Test Package : IND 2 (Additional Tests: KF, SpecGravity)								
To discuss this	s sample report,	contact Customer Service	e at 1-800-237-	1369.	tre			
* - Denotes tes	t methods that	are outside of the ISO 170	25 scope of ac	ccreditation.				
Statements of	conformity to sr	pecifications are based on	the simple acc	eptance decision rule (JC	GM 106:20			

DUBLIN, GA US 31021 Contact: TRENT MCADAMS trent.mcadams@parker.com T: (478)275-4030 106:2012) F:

Report Id: PARDUBGA [WUSCAR] 06207016 (Generated: 06/20/2024 06:22:23) Rev: 1

Submitted By: TRENT MCADAMS

Page 2 of 2