




# OIL ANALYSIS REPORT

Area  
**HPU28**  
 Machine Id  
**HTS23**  
 Component  
**Hydraulic System**  
 Fluid  
**CASTROL BRAYCO MICRONIC 882 (--- GAL)**

Sample Rating Trend

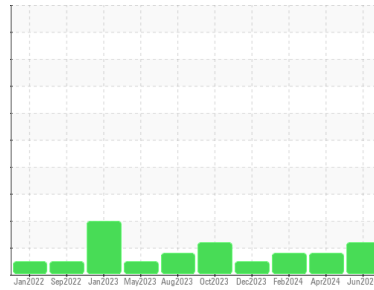

## DIAGNOSIS

- Recommendation**  
Resample at the next service interval to monitor.
- Wear**  
All component wear rates are normal.
- Contamination**  
The water content is negligible. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.
- Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0896085</b>	WC0896048	WC0896067
Sample Date	Client Info		<b>10 Jun 2024</b>	08 Apr 2024	13 Feb 2024
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ATTENTION	ATTENTION

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>0</b>	0	0
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	<b>593</b>	3	677
Zinc	ppm	ASTM D5185m	<b>2</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>0</b>	0	5

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>1</b>	0	<1
Sodium	ppm	ASTM D5185m	<b>0</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Water	%	ASTM D6304 >0.05	<b>0.017</b>	0.013	0.015
ppm Water	ppm	ASTM D6304 >500	<b>178</b>	138	155

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	<b>216</b>	705	613
Particles >6µm	ASTM D7647	>160	<b>62</b>	119	185
Particles >14µm	ASTM D7647	>20	<b>5</b>	4	6
Particles >21µm	ASTM D7647	>4	<b>1</b>	1	1
Particles >38µm	ASTM D7647	>3	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>16/14/11	<b>15/13/10</b>	17/14/9	16/15/10

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.014	<b>1.049</b>	0.968	0.918




# OIL ANALYSIS REPORT

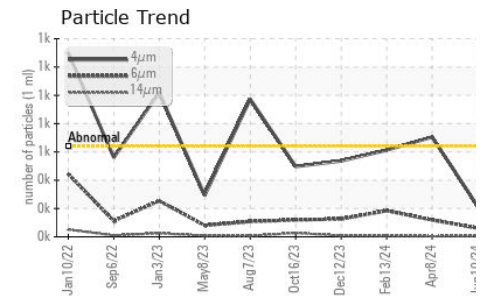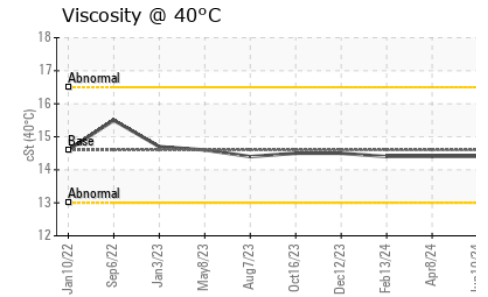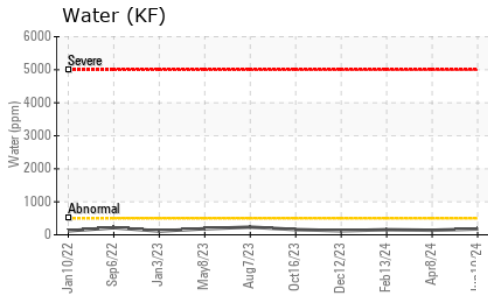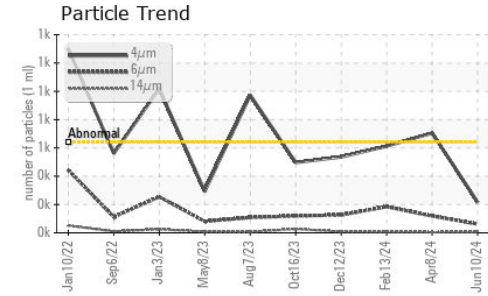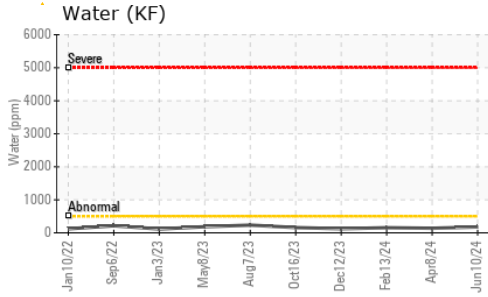





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		0.852	0.851	0.852
Visc @ 40°C	cSt ASTM D445	14.6	14.4	14.4	14.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

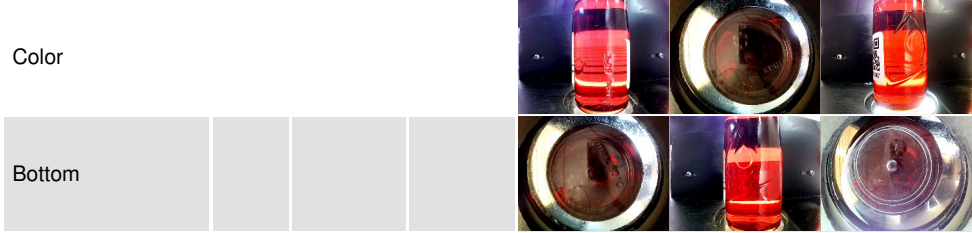

## GRAPHS

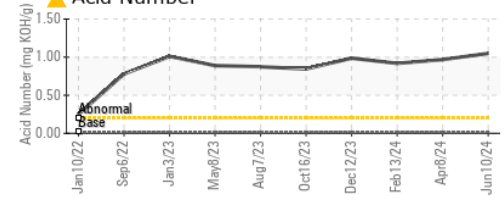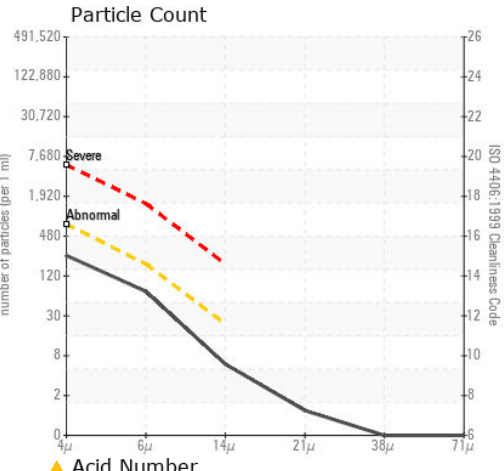

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0896085 **Received** : 11 Jun 2024  
**Lab Number** : 06207022 **Tested** : 17 Jun 2024  
**Unique Number** : 11074483 **Diagnosed** : 18 Jun 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, SpecGravity )

**PARKER AEROSPACE**  
 2010 WALDROP INDUSTRIAL BLVD  
 DUBLIN, GA  
 US 31021  
 Contact: TRENT MCADAMS  
 trent.mcadams@parker.com  
 T: (478)275-4030  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)