


## **OIL ANALYSIS REPORT**

Sample Rating Trend

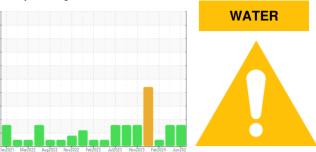

HTS26 Hydraulic System ESSO HYJET IV-A PLUS (--- GAL)

## DIAGNOSIS

Area HPU21 Machine Id

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

## Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0896088	WC0896038	WC0896072
Sample Date		Client Info		10 Jun 2024	08 Apr 2024	13 Feb 2024
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	<1	2
Chromium	ppm	ASTM D5185m	>20	6	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m		<1	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	<1	1
Vanadium	ppm	ASTM D5185m	-	<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	0	<1
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		2	11	0
Calcium	ppm	ASTM D5185m	110	112	147	108
Phosphorus	ppm	ASTM D5185m	37	45907	28253	30303
Zinc	ppm	ASTM D5185m		0	18	0
Sulfur	ppm	ASTM D5185m	220	251	382	304
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	<1	<1
Sodium	ppm	ASTM D5185m		5	7	6
Potassium	ppm	ASTM D5185m	>20	40	31	28
	0/	AOTH DOODA				
Water	%	ASTM D6304	>0.750	<u> </u>	<b>0.951</b>	0.657
	ppm	ASTM D6304 ASTM D6304		▲ 0.933 ▲ 9328	<ul><li>▲ 0.951</li><li>▲ 9516</li></ul>	0.657 6570
	ppm					
ppm Water FLUID CLEANLIN Particles >4µm	ppm	ASTM D6304 method ASTM D7647	>7500 limit/base >640	<ul> <li>9328</li> <li>current</li> <li>157</li> </ul>	<ul> <li>▲ 9516</li> <li>history1</li> <li>608</li> </ul>	6570 history2 393
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm	ASTM D6304 method	>7500 limit/base >640	▲ 9328 current	▲ 9516 history1	6570 history2 393 105
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>7500 limit/base >640 >160 >20	<ul> <li>9328</li> <li>current</li> <li>157</li> </ul>	<ul> <li>▶ 9516</li> <li>▶ history1</li> <li>608</li> <li>64</li> <li>9</li> </ul>	6570 history2 393 105 14
ppm Water FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647	>7500 limit/base >640 >160 >20	<ul> <li>9328</li> <li>current</li> <li>157</li> <li>49</li> </ul>	<ul> <li>9516</li> <li>history1</li> <li>608</li> <li>64</li> </ul>	6570 history2 393 105
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>7500 limit/base >640 >160 >20	<ul> <li>9328</li> <li>current</li> <li>157</li> <li>49</li> <li>11</li> </ul>	<ul> <li>▶ 9516</li> <li>▶ history1</li> <li>608</li> <li>64</li> <li>9</li> </ul>	6570 history2 393 105 14
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>7500 limit/base >640 >160 >20 >4 >3	<ul> <li>9328</li> <li>current</li> <li>157</li> <li>49</li> <li>11</li> <li>3</li> </ul>	<ul> <li>▶ 9516</li> <li>▶ history1</li> <li>608</li> <li>64</li> <li>9</li> <li>3</li> </ul>	6570 history2 393 105 14 4
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>7500 limit/base >640 >160 >20 >4 >3	<ul> <li>9328</li> <li>current</li> <li>157</li> <li>49</li> <li>11</li> <li>3</li> <li>0</li> </ul>	<ul> <li>▶ 9516</li> <li>▶ history1</li> <li>608</li> <li>64</li> <li>9</li> <li>3</li> <li>0</li> </ul>	6570 history2 393 105 14 4 1
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ESS	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>7500 limit/base >640 >160 >20 >4 >3 >3	<ul> <li>9328</li> <li>current</li> <li>157</li> <li>49</li> <li>11</li> <li>3</li> <li>0</li> <li>0</li> <li>0</li> </ul>	<ul> <li>▶ 9516</li> <li>▶ history1</li> <li>608</li> <li>64</li> <li>9</li> <li>3</li> <li>0</li> <li>0</li> <li>0</li> </ul>	6570 history2 393 105 14 4 1 0




# **OIL ANALYSIS REPORT**

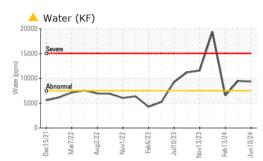

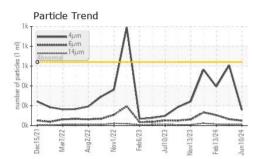

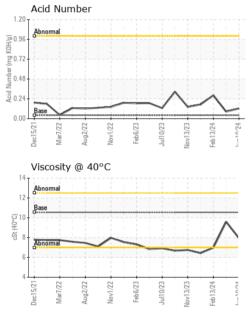




Report Id: PARDUBGA [WUSCAR] 06207026 (Generated: 06/20/2024 14:14:48) Rev: 1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.750	NEG	NEG	NEG
Free Water	scalar	*Visual		1.0	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	.996	0.100	1.001	1.000
Visc @ 40°C	cSt	ASTM D445	10.55	7.95	9.6	6.98
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

Bottom

Color

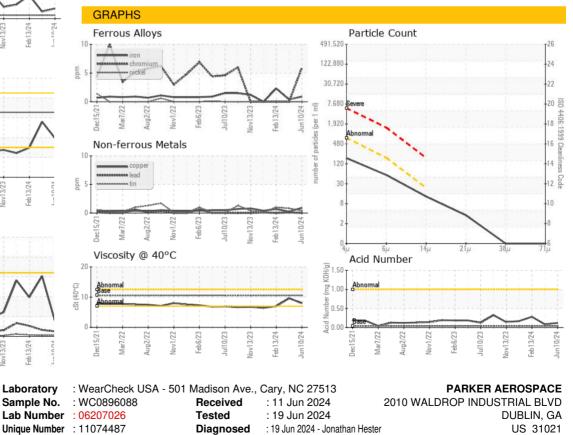



Certificate 12367 **Test Package** : IND 2 (Additional Tests: KF, SpecGravity) To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TRENT MCADAMS

Contact: TRENT MCADAMS

trent.mcadams@parker.com

Page 2 of 2

F:

T: (478)275-4030