

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**MTS F2**  
Component  
**Hydraulic System**  
Fluid  
**BIO FLO HDFU 46 (55 GAL)**

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>TO60002692</b>	---	---
Sample Date	Client Info	<b>28 May 2024</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>27</b>	---	---
Calcium	ppm	ASTM D5185m		<b>7</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>245</b>	---	---
Zinc	ppm	ASTM D5185m		<b>194</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1284</b>	---	---

**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>15	<b>1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water	%	ASTM D6304	>0.05	<b>0.041</b>	---	---
ppm Water	ppm	ASTM D6304	>500	<b>419</b>	---	---






**FLUID CLEANLINESS** method limit/base current history1 history2

Particles >4µm	ASTM D7647	>5000	<b>598</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>171</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>31</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>13</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>16/15/12</b>	---	---

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.64</b>	---	---
------------------	----------	------------	--	-------------	-----	-----

# OIL ANALYSIS REPORT

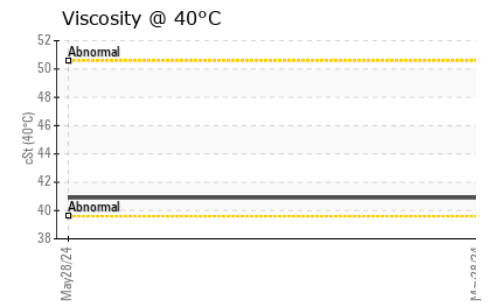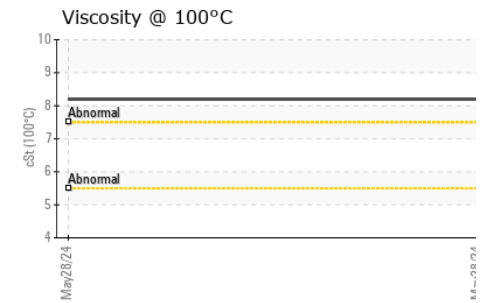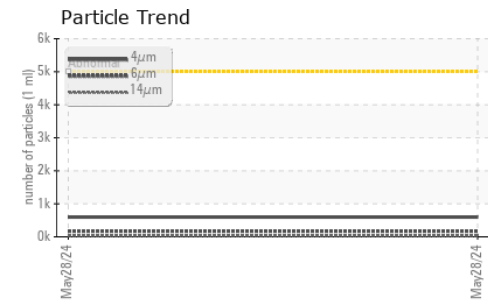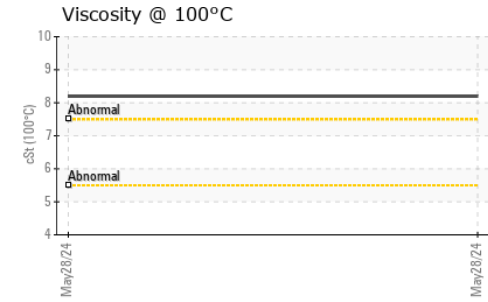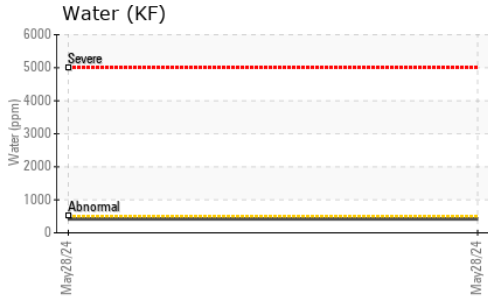




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	40.9	---	---
Visc @ 100°C	cSt	ASTM D445	8.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270	180	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

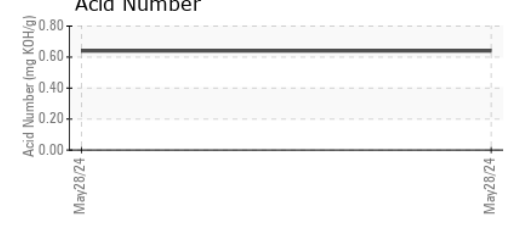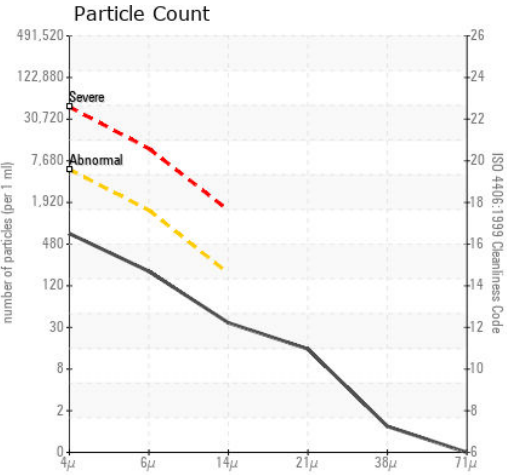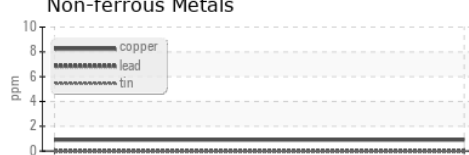

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO60002692 **Received** : 11 Jun 2024  
**Lab Number** : 06207078 **Tested** : 13 Jun 2024  
**Unique Number** : 11074539 **Diagnosed** : 13 Jun 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, VI )

**DICKSON TESTING CO INC**  
 11126 PALMER AVE  
 SOUTH GATE, CA  
 US 90280  
 Contact: JESUS ZAVALA  
 jesus.zavala@dicksontesting.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)