


OIL ANALYSIS REPORT

Sample Rating Trend

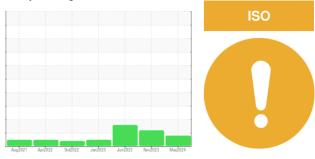

Machine Id

7553322 (S/N 1047)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018302	KCPA007083	KCP54177
Sample Date		Client Info		22 May 2024	14 Nov 2023	28 Jun 2023
Machine Age	hrs	Client Info		28339	23782	20482
Oil Age	hrs	Client Info		4557	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ATTENTION	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	<1
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	2	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	11	26
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	4	0	2
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	0	1	2
Calcium	ppm	ASTM D5185m	0	0	<1	0
Phosphorus	ppm	ASTM D5185m	0	<1	1	46
Zinc	ppm	ASTM D5185m	0	0	9	1
Sulfur	ppm	ASTM D5185m	23500	19183	17123	19609
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304	>0.05	0.006	0.026	0.005
ppm Water	ppm	ASTM D6304	>500	67	264	50.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1729	2985	67176
Particles >6µm		ASTM D7647	>1300	682	1049	▲ 34649
Particles >14µm		ASTM D7647	>80	86	120	▲ 999
Particles >21µm		ASTM D7647	>20	27	0 30	6 9
Particles >38µm		ASTM D7647	>4	2	1	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/13	— 17/14	17/14	2 2/17
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.55	0.49	0.32

Contact/Location: R. VILLARBA - BOUMEA Page 1 of 2




OIL ANALYSIS REPORT

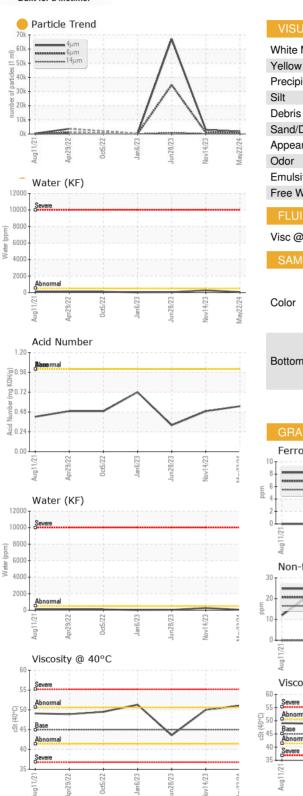



Bottom

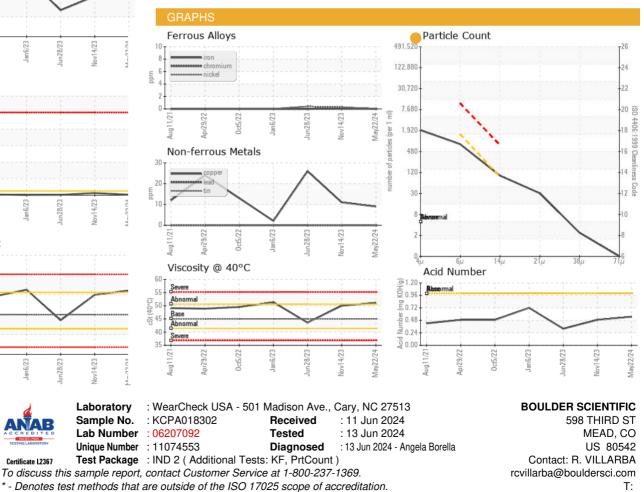

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: R. VILLARBA - BOUMEA

F: