




# OIL ANALYSIS REPORT

Sample Rating Trend

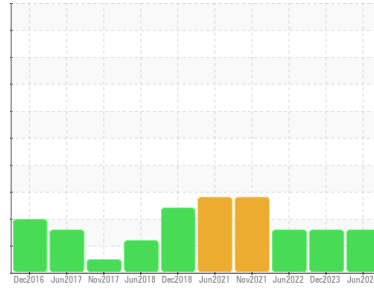

ISO



Machine Id  
**KAESER AS 20T 2327848 (S/N 1016)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>KCPA014642</b>	KCPA010980	KCP41423	
Sample Date	Client Info	<b>03 Jun 2024</b>	12 Dec 2023	27 Jun 2022	
Machine Age	hrs	Client Info	<b>37963</b>	36851	33974
Oil Age	hrs	Client Info	<b>2000</b>	0	3000
Oil Changed	Client Info	<b>Changed</b>	N/A	Changed	
Sample Status		<b>ABNORMAL</b>	ATTENTION	ATTENTION	

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>2</b>	1	3
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	11
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 90	<b>32</b>	41	47
Calcium	ppm	ASTM D5185m 2	<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185m	<b>&lt;1</b>	0	5
Zinc	ppm	ASTM D5185m	<b>16</b>	12	17
Sulfur	ppm	ASTM D5185m	<b>20562</b>	17013	21413

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185m	<b>12</b>	15	16
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	2
Water	%	ASTM D6304 >0.05	<b>0.018</b>	0.013	0.034
ppm Water	ppm	ASTM D6304 >500	<b>185</b>	131	341.2






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>5425</b>	9203	9353
Particles >6µm	ASTM D7647 >1300	<b>1999</b>	1640	2110
Particles >14µm	ASTM D7647 >80	<b>251</b>	118	126
Particles >21µm	ASTM D7647 >20	<b>77</b>	33	30
Particles >38µm	ASTM D7647 >4	<b>3</b>	1	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	<b>20/18/15</b>	20/18/14	20/18/14

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.31</b>	0.26	0.30

# OIL ANALYSIS REPORT

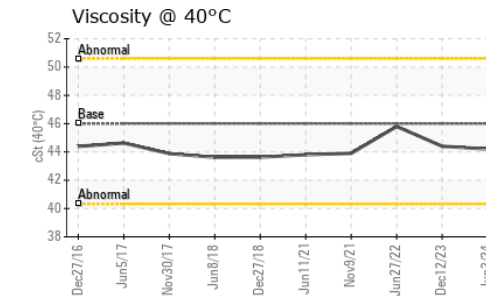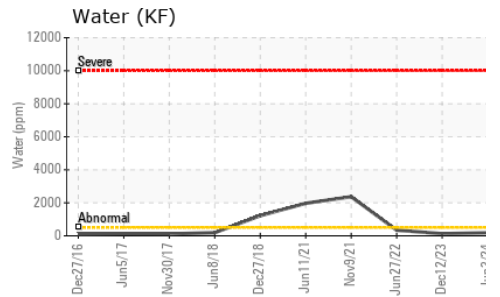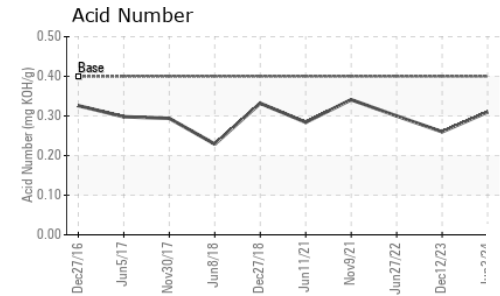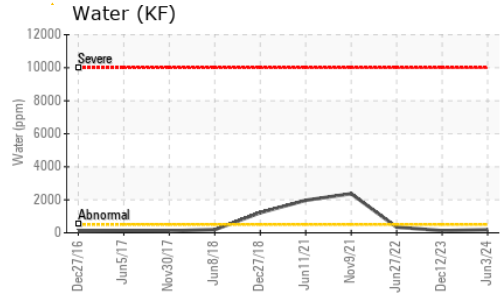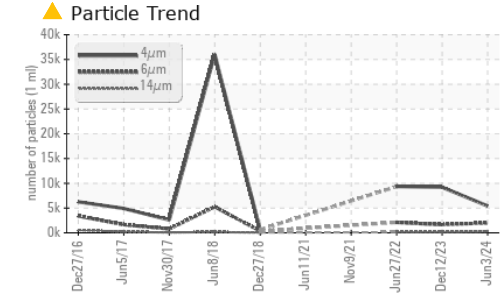





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.2	44.4	45.8

**SAMPLE IMAGES**

method	limit/base	current	history1	history2
Color				
Bottom				

**GRAPHS**

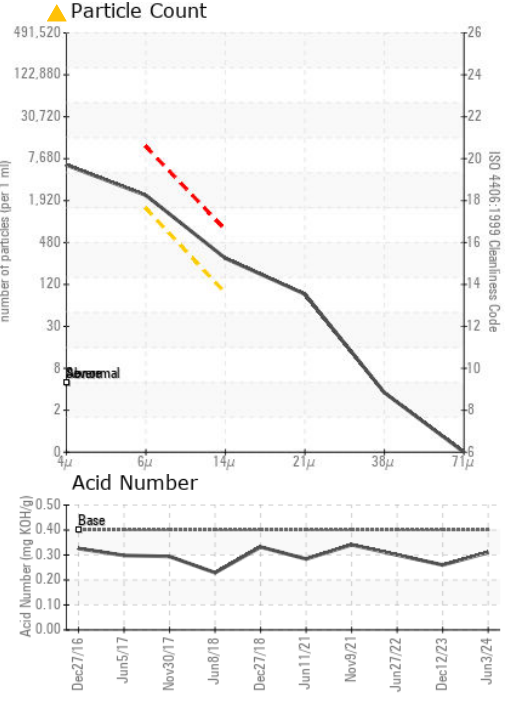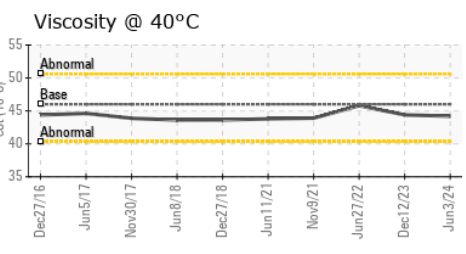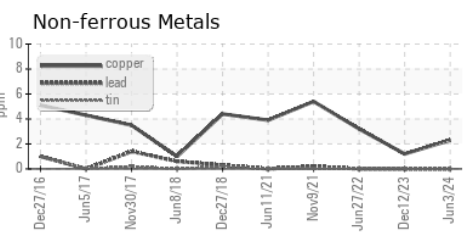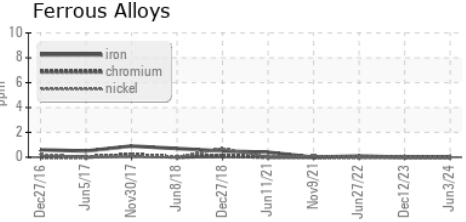

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA014642 **Received** : 11 Jun 2024  
**Lab Number** : 06207104 **Tested** : 13 Jun 2024  
**Unique Number** : 11074565 **Diagnosed** : 13 Jun 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**POMPS TIRE**  
 202 S SYLVANIA AVE  
 STURTEVANT, WI  
 US 53177  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: