




# OIL ANALYSIS REPORT

## Sample Rating Trend

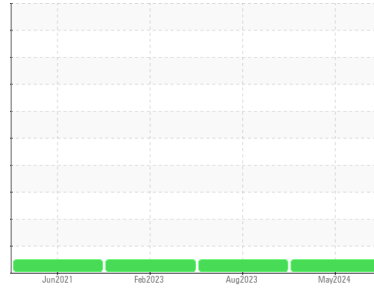

**NORMAL**



Area  
**[20522]**

Machine Id  
**30-90**

Component  
**Diesel Engine**

Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0940718</b>	WC0818717	WC0793273
Sample Date	Client Info			<b>30 May 2024</b>	24 Aug 2023	23 Feb 2023
Machine Age	hrs	Client Info		<b>2208</b>	1809	1368
Oil Age	hrs	Client Info		<b>399</b>	441	416
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>25</b>	20	18
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	2
Lead	ppm	ASTM D5185m	>40	<b>2</b>	2	2
Copper	ppm	ASTM D5185m	>330	<b>3</b>	5	9
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	85	<b>34</b>	26	55
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>9</b>	62	55
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	350	<b>683</b>	318	413
Calcium	ppm	ASTM D5185m	1800	<b>1428</b>	2082	1778
Phosphorus	ppm	ASTM D5185m	1000	<b>981</b>	1121	991
Zinc	ppm	ASTM D5185m	1100	<b>1233</b>	1354	1236
Sulfur	ppm	ASTM D5185m	3500	<b>3763</b>	4584	3344




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>14</b>	15	13
Sodium	ppm	ASTM D5185m		<b>4</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	11.1	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	22.0	21.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.0</b>	18.2	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	<b>7.5</b>	6.7	7.8







# OIL ANALYSIS REPORT

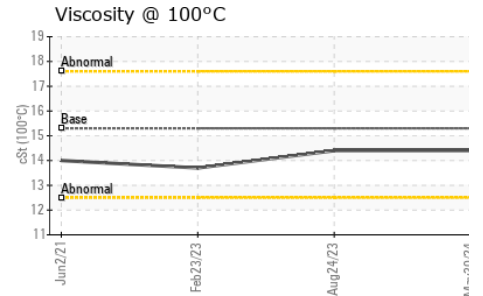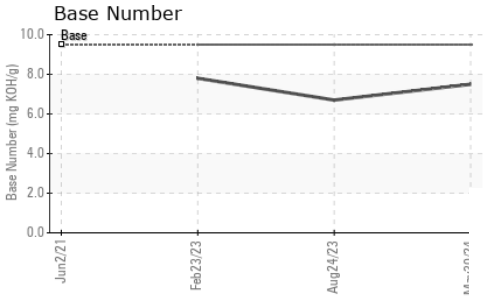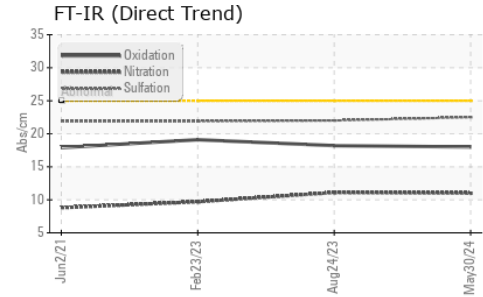

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.3	<b>14.4</b>	14.4	13.7

### GRAPHS

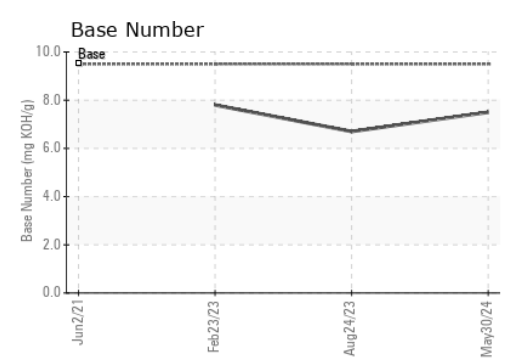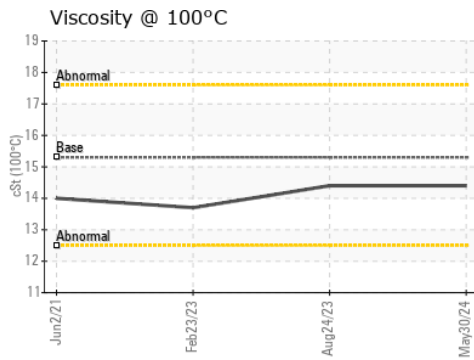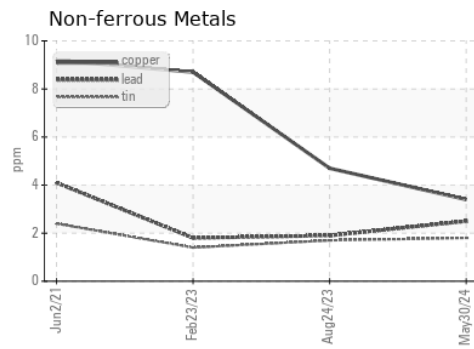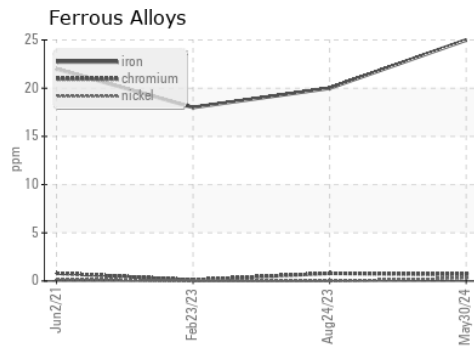

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0940718      **Received** : 11 Jun 2024  
**Lab Number** : **06207294**      **Tested** : 13 Jun 2024  
**Unique Number** : 11074755      **Diagnosed** : 13 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)