




# OIL ANALYSIS REPORT

## Sample Rating Trend

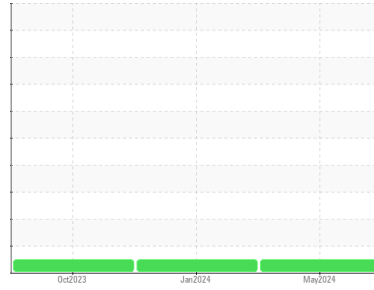

**NORMAL**



Machine Id  
**G93**  
 Component  
**Diesel Engine**  
 Fluid  
**DYNA-PLEX 21C 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0885717</b>	WC0885683	WC0759022
Sample Date	Client Info			<b>15 May 2024</b>	12 Jan 2024	23 Oct 2023
Machine Age	hrs	Client Info		<b>9026</b>	8487	7972
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>9</b>	8	19
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>18</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>5</b>	6	5
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>67</b>	63	72
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>886</b>	945	1001
Calcium	ppm	ASTM D5185m		<b>1084</b>	1156	1164
Phosphorus	ppm	ASTM D5185m		<b>1032</b>	977	1062
Zinc	ppm	ASTM D5185m	1300	<b>1206</b>	1226	1385
Sulfur	ppm	ASTM D5185m		<b>3195</b>	3058	3229





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	6
Sodium	ppm	ASTM D5185m		<b>2</b>	4	7
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	8.0	10.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.0</b>	18.7	21.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.6</b>	14.7	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>8.2</b>	8.6	6.8







# OIL ANALYSIS REPORT

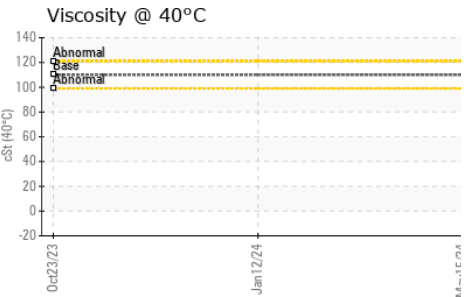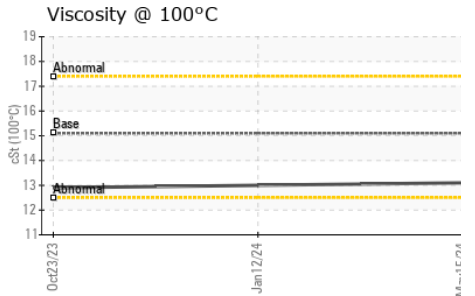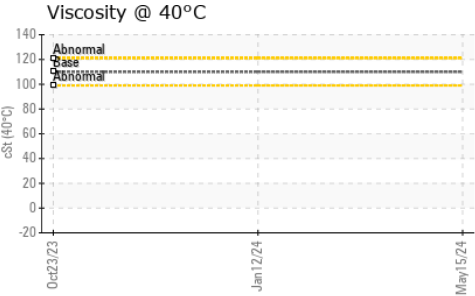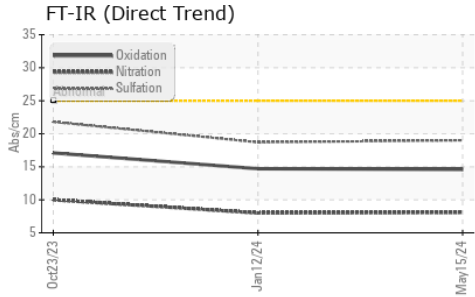

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>13.1</b>	13.0	12.9

### GRAPHS

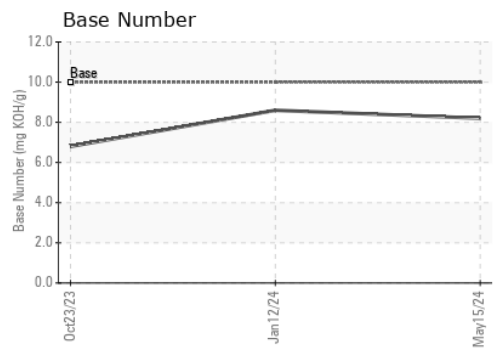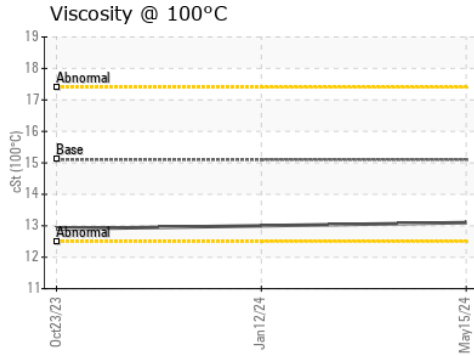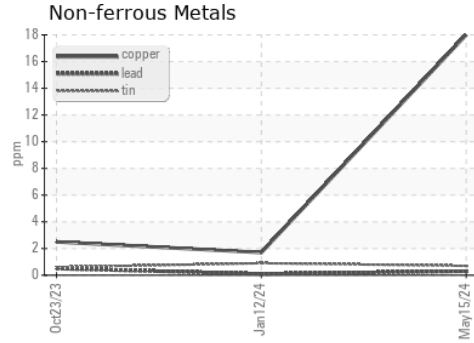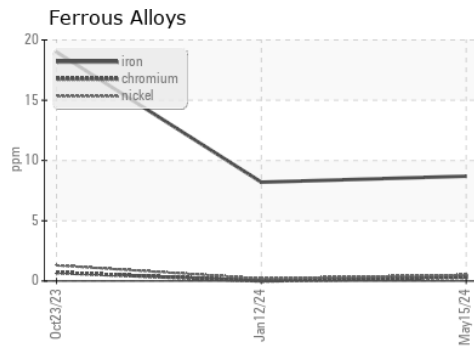

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0885717      **Received** : 12 Jun 2024  
**Lab Number** : **06207620**      **Tested** : 14 Jun 2024  
**Unique Number** : 11075081      **Diagnosed** : 14 Jun 2024 - Angela Borella  
**Test Package** : CONST ( Additional Tests: KV40, TBN )

**Apple Valley Waste - Baltimore District**  
 240 S KRESSON ST  
 BALTIMORE, MD  
 US 21224  
 Contact: KEVIN HINSON  
 khinson@goldmedal.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)