

OIL ANALYSIS REPORT



NORMAL



Machine Id **MTS F16**

Component Hydraulic System

BIO FLO HDFU 46 (55 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
		Client Info		TO60002688		
Sample Number		Client Info		06 Jun 2024		
Sample Date Machine Age	hrs	Client Info		4000		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status		Oliciti IIIIo		NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	00	0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	1		
Copper	ppm	ASTM D5185m	>20	3		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		25		
Phosphorus	ppm	ASTM D5185m		243		
Zinc	ppm	ASTM D5185m		332		
Sulfur	ppm	ASTM D5185m		806		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.005		
ppm Water	ppm	ASTM D6304	>500	51		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	256		
Particles >6µm		ASTM D7647	>1300	91		
Particles >14μm		ASTM D7647	>160	10		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/14/10		
FLUID DEGRADA	TION _	method	limit/base	current	history1	history2
A sid Niverk su (ANI)	ma 1/011/-	VCTM D004E		0.42		


Acid Number (AN)

mg KOH/g ASTM D8045

0.42



OIL ANALYSIS REPORT

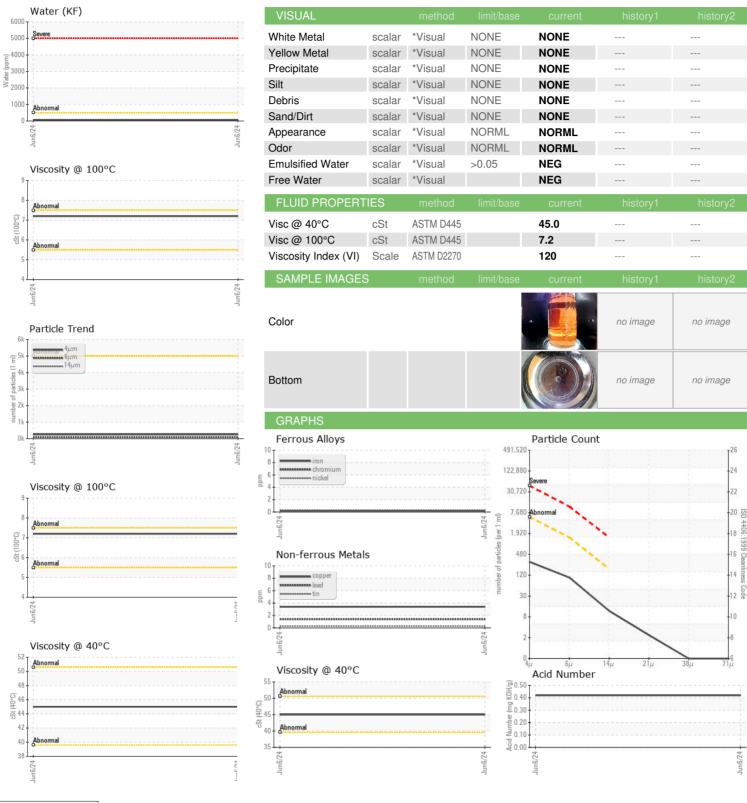





Certificate 12367

Laboratory Sample No.

Lab Number : 06207784

: TO60002688 Unique Number : 11075245

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 12 Jun 2024 Tested : 13 Jun 2024

Diagnosed : 13 Jun 2024 - Wes Davis

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DICKSON TESTING CO INC

11126 PALMER AVE SOUTH GATE, CA US 90280

Contact: JESUS ZAVALA jesus.zavala@dicksontesting.com

T: F: