

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# **7019467 (S/N 1869)** Compressor

### Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012329	KCP40963	
Sample Date		Client Info		17 May 2024	26 May 2023	
Machine Age	hrs	Client Info		3000	2304	
Oil Age	hrs	Client Info		3000	2304	
Oil Changed		Client Info		Changed	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	0	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm	ASTM D5185m	>50	<1	<1	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	55	81	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	75	90	
Calcium	ppm	ASTM D5185m	0	0	1	
Phosphorus	ppm	ASTM D5185m	0	0	2	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	23500	20261	23125	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	
Sodium	ppm	ASTM D5185m		19	13	
Potassium	ppm	ASTM D5185m	>20	3	2	
Water	%	ASTM D6304	>0.05	0.027	0.015	
ppm Water	ppm	ASTM D6304	>500	272	155.2	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		38246	5896	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<b>1</b> 924	
Particles >14µm		ASTM D7647	>80	<b> </b> 1782	<b>1</b> 76	
Particles >21µm		ASTM D7647	>20	<mark>人</mark> 351	<b>4</b> 2	
Particles >38µm		ASTM D7647	>4	<u> </u>	<b>5</b>	
Particles >71µm		ASTM D7647	>3	1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>22/21/18</b>	▲ 20/18/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36	0.35	


Contact/Location: Service Manager - AMAEASCA Page 1 of 2



Built for a lifetime

## **OIL ANALYSIS REPORT**

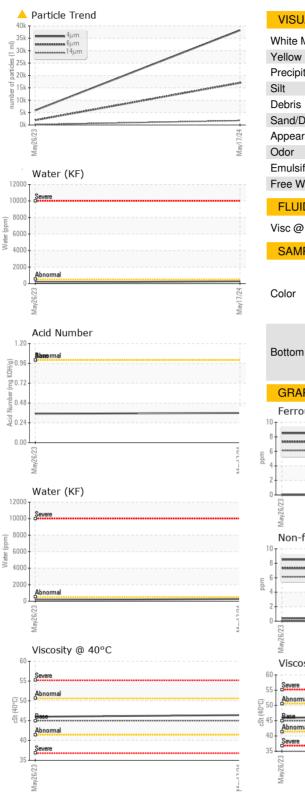

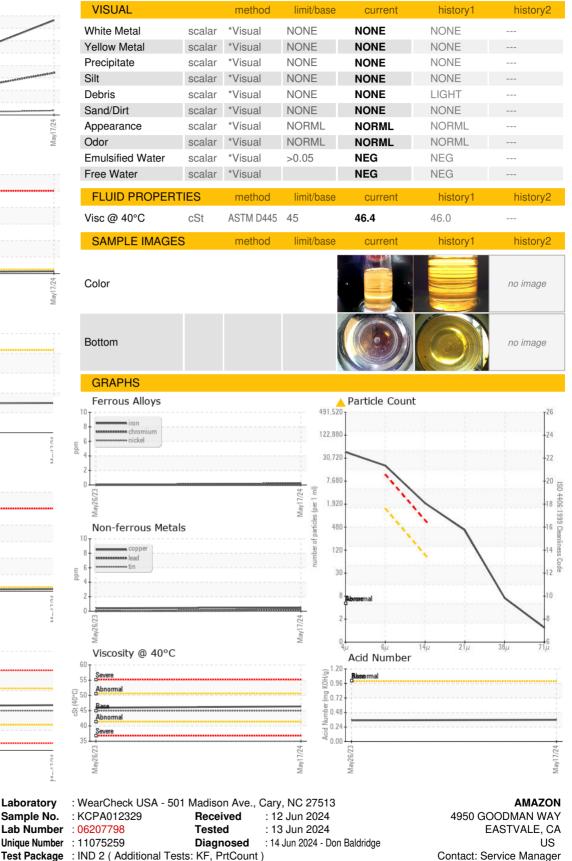

Certificate 12367

Laboratory

Sample No.

Lab Number

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - AMAEASCA

T:

F: