


OIL ANALYSIS REPORT

Sample Rating Trend

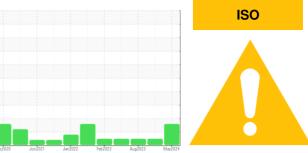

Machine Id

KAESER 6328459

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC128265	KC124764	KC121409
Sample Date		Client Info		31 May 2024	14 Nov 2023	14 Aug 2023
Machine Age	hrs	Client Info		25544	26843	23228
Oil Age	hrs	Client Info		2316	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	0	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	2	<1	2
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron		ASTM D5185m			0	0
	ppm		00	0		-
Barium	ppm	ASTM D5185m	90	37 0	45	38 0
Molybdenum	ppm	ASTM D5185m		0	0	-
Manganese	ppm	ASTM D5185m	00	-		0
Magnesium	ppm	ASTM D5185m ASTM D5185m	90	76 0	62 0	58 2
Calcium	ppm		2	0		2
Phosphorus	ppm	ASTM D5185m		0	0	4
Zinc	ppm	ASTM D5185m		U	0	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11	9	14
Sodium	ppm	ASTM D5185m		25	20	20
Potassium	ppm	ASTM D5185m	>20	6	3	7
Water	%	ASTM D6304		0.029	0.012	0.047
ppm Water	ppm	ASTM D6304	>500	295	120.4	475.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4513	1932	1431
Particles >6µm		ASTM D7647	>1300	<u> </u>	319	504
Particles >14µm		ASTM D7647	>80	<u> </u>	24	39
Particles >21µm		ASTM D7647	>20	<u> </u>	7	9
Particles >38µm		ASTM D7647	>4	3	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/18/16	18/15/12	18/16/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.36	0.31	0.35



OIL ANALYSIS REPORT

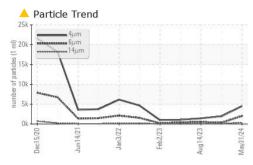




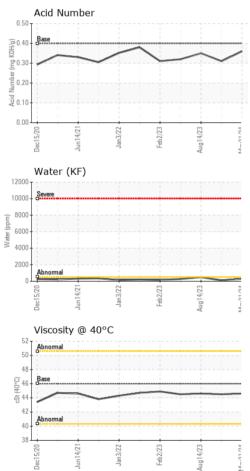

Dec]

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	44.5	44.6
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				•		

Bottom

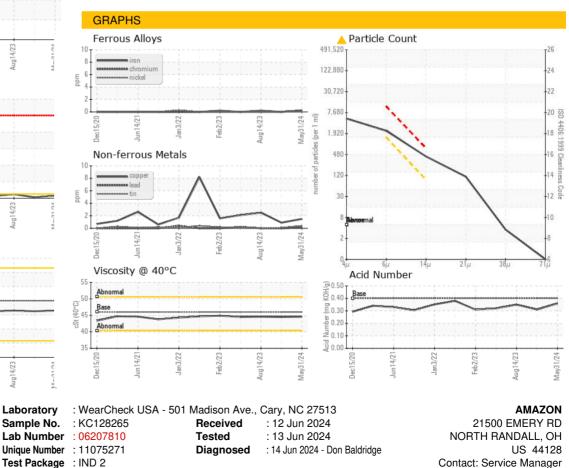

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

Certificate 12367

Contact/Location: Service Manager - AMANOROH