

OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION



Machine Id
408551
Component
Diesel Engine
Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN level is low.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		TO10003527	---	---
Sample Date	Client Info		05 Jun 2024	---	---
Machine Age	hrs	Client Info	6388	---	---
Oil Age	hrs	Client Info	1237	---	---
Oil Changed		Client Info	Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>90	▲ 94	---	---
Chromium	ppm	ASTM D5185m	>20	4	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	20	---	---
Lead	ppm	ASTM D5185m	>40	5	---	---
Copper	ppm	ASTM D5185m	>330	4	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m		18	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m	65	76	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	1060	50	---	---
Calcium	ppm	ASTM D5185m	1140	2382	---	---
Phosphorus	ppm	ASTM D5185m	1170	948	---	---
Zinc	ppm	ASTM D5185m	1230	1148	---	---
Sulfur	ppm	ASTM D5185m	3130	5680	---	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	7	---	---
Sodium	ppm	ASTM D5185m		7	---	---
Potassium	ppm	ASTM D5185m	>20	58	---	---

INFRA-RED method limit/base current history1 history2


Soot %	%	*ASTM D7844	>6	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.7	---	---

FLUID DEGRADATION method limit/base current history1 history2


Oxidation	Abs/.1mm	*ASTM D7414	>25	22.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	▲ 3.64	---	---

OIL ANALYSIS REPORT

▲ Ferrous Alloys

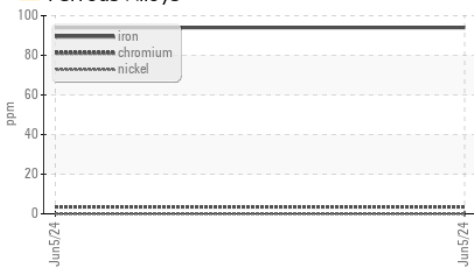

● FT-IR (Direct Trend)

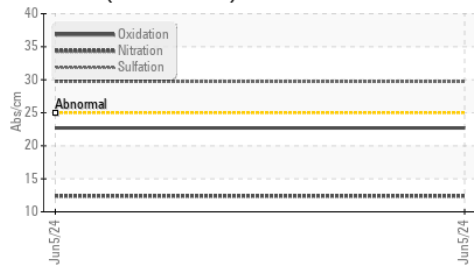


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 118	89.7	---	---
Visc @ 100°C	cSt	ASTM D445 15.9	12.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270 143	142	---	---

GRAPHS


▲ Iron (ppm)

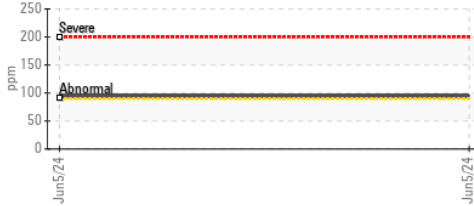

▲ Lead (ppm)




▲ Aluminum (ppm)

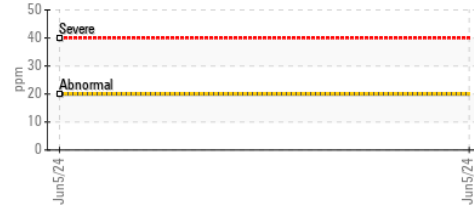

▲ Chromium (ppm)



▲ Copper (ppm)

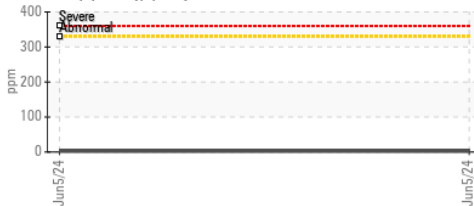

▲ Silicon (ppm)



▲ Viscosity @ 100°C




▲ Base Number




Viscosity @ 40°C



Viscosity @ 100°C

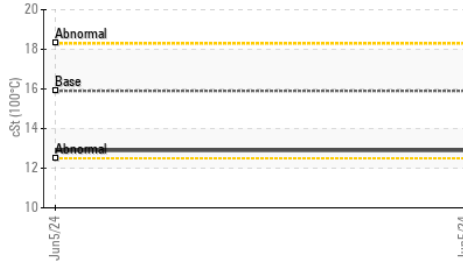

Viscosity @ 40°C

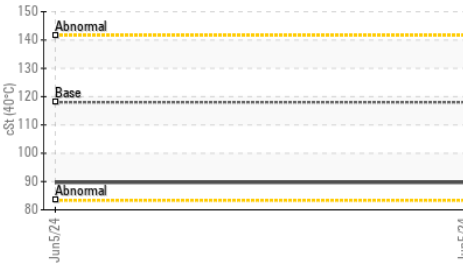

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003527 **Received** : 12 Jun 2024
Lab Number : 06208000 **Tested** : 14 Jun 2024
Unique Number : 11075461 **Diagnosed** : 14 Jun 2024 - Sean Felton
Test Package : MOB 2 (Additional Tests: KV40, VI)

KLX ENERGY SERVICES
 5104 ESTES PKWY
 LONGVIEW, TX
 US 75603
 Contact: DUSTIN TREST
 dustin.trest@klx.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)