




# OIL ANALYSIS REPORT

Sample Rating Trend

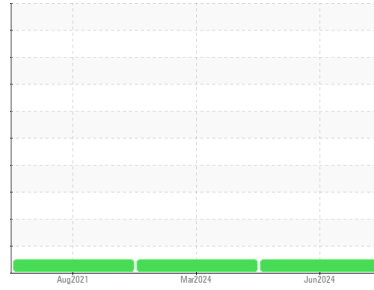

**NORMAL**



Machine Id  
**VOLVO A45G 342394**  
 Component  
**Bogie/Center Axle**  
 Fluid  
**VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ML0002736</b>	ML0000903	VCP318040
Sample Date	Client Info			<b>07 Jun 2024</b>	26 Mar 2024	30 Aug 2021
Machine Age	hrs	Client Info		<b>8550</b>	8192	4119
Oil Age	hrs	Client Info		<b>358</b>	4073	0
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>900	<b>28</b>	208	142
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	2
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	1	1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	4	<1
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>&lt;1</b>	4	2
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>335</b>	289	172
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	5	6
Magnesium	ppm	ASTM D5185m		<b>1</b>	2	0
Calcium	ppm	ASTM D5185m		<b>10</b>	75	30
Phosphorus	ppm	ASTM D5185m		<b>2238</b>	2495	979
Zinc	ppm	ASTM D5185m		<b>9</b>	61	19
Sulfur	ppm	ASTM D5185m		<b>28430</b>	32705	24873

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	17	3
Sodium	ppm	ASTM D5185m		<b>0</b>	4	<1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	11

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT



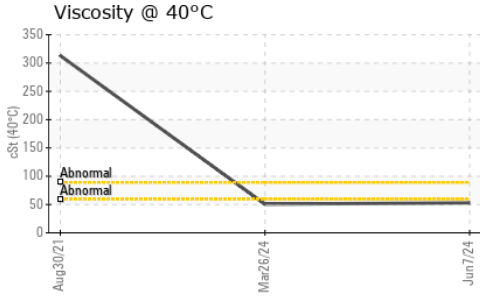


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>53.0</b>	50.6	313

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

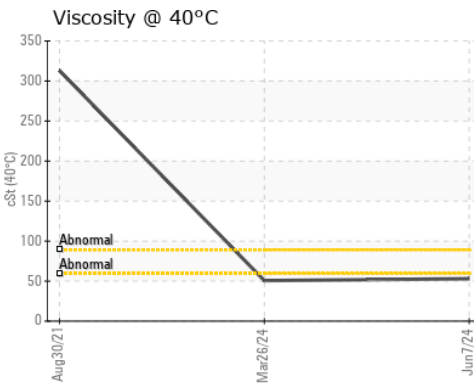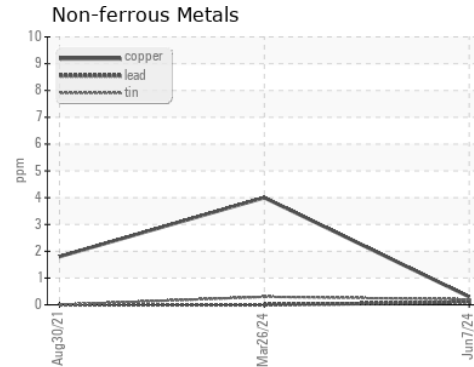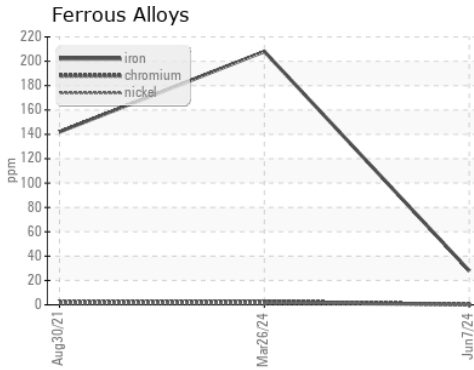

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0002736  
**Lab Number** : 06208142  
**Unique Number** : 11075603  
**Test Package** : CONST

**Received** : 12 Jun 2024  
**Tested** : 14 Jun 2024  
**Diagnosed** : 14 Jun 2024 - Don Baldrige

**MCCLUNG-LOGAN EQUIPMENT CO - RICHMOND**  
 1345 MOUNTAIN ROAD  
 GLEN ALLEN, VA  
 US 23060  
 Contact: KYLE RATLIFFE  
 KRATLIFFE@MCCLUNG-LOGAN.COM

T:  
 F: (804)266-1611