




OIL ANALYSIS REPORT



Area
COLORADO/443
 Machine Id
48.05L [COLORADO^443]
 Component
Front Differential
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

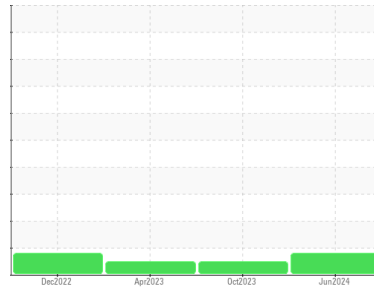

DIAGNOSIS

Recommendation
 The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 Gear wear is indicated. All other component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0928718	WC0859733	WC0799032
Sample Date	Client Info		10 Jun 2024	20 Oct 2023	21 Apr 2023
Machine Age	hrs	Client Info	1980	1443	962
Oil Age	hrs	Client Info	0	1443	962
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	▲ 523	260	92
Chromium	ppm	ASTM D5185m >3	2	1	<1
Nickel	ppm	ASTM D5185m >3	1	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >30	4	4	3
Lead	ppm	ASTM D5185m >13	<1	<1	0
Copper	ppm	ASTM D5185m >103	62	43	23
Tin	ppm	ASTM D5185m >5	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	31	30	27
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	<1	<1
Manganese	ppm	ASTM D5185m	5	3	2
Magnesium	ppm	ASTM D5185m	10	10	12
Calcium	ppm	ASTM D5185m	2935	2875	2969
Phosphorus	ppm	ASTM D5185m	996	983	1003
Zinc	ppm	ASTM D5185m	1233	1206	1262
Sulfur	ppm	ASTM D5185m	5816	5138	6667

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	8	7	4
Sodium	ppm	ASTM D5185m	0	2	2
Potassium	ppm	ASTM D5185m >20	2	1	1


VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG




OIL ANALYSIS REPORT

▲ Ferrous Alloys

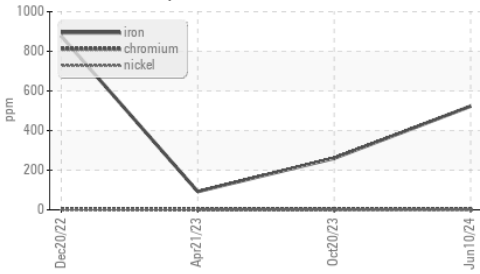

Viscosity @ 40°C

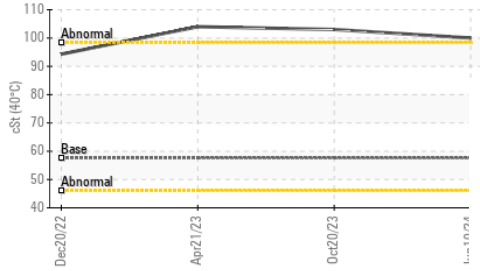

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	57.6	100	103

SAMPLE IMAGES


method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS


▲ Ferrous Alloys

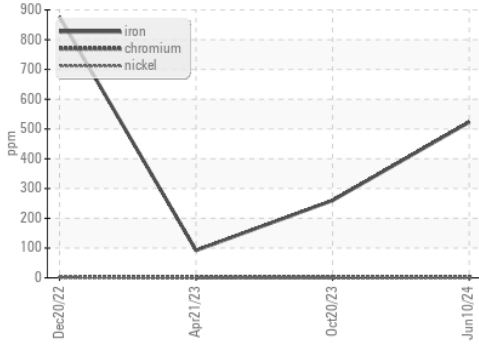

Non-ferrous Metals

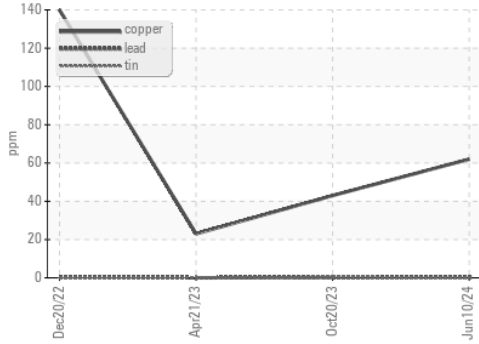

Viscosity @ 40°C

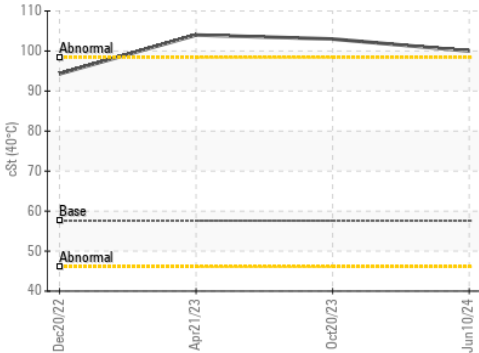

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0928718
Lab Number : **06208186**
Unique Number : 11075647
Test Package : CONST

Received : 12 Jun 2024
Tested : 14 Jun 2024
Diagnosed : 14 Jun 2024 - Don Baldrige

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213

Contact: BILL ORCUTT
 william.orcutt@wildcat.net
 T: (719)499-6303

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: