




# OIL ANALYSIS REPORT

Sample Rating Trend

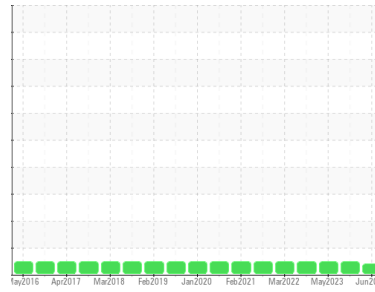

**VIS DEBRIS**



Area  
**East Molding**  
 Machine Id  
**519 (S/N 826-0147)**

Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (185 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RP0043252</b>	RP0035818	RP0029219
Sample Date	Client Info			<b>08 Jun 2024</b>	28 Nov 2023	03 May 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>5</b>	3	4
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m	>20	<b>6</b>	5	7
Copper	ppm	ASTM D5185m	>20	<b>7</b>	7	7
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	0	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	25	<b>4</b>	4	9
Calcium	ppm	ASTM D5185m	200	<b>73</b>	75	87
Phosphorus	ppm	ASTM D5185m	300	<b>363</b>	361	369
Zinc	ppm	ASTM D5185m	370	<b>411</b>	402	434

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185m		<b>3</b>	3	0
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	2
Water	%	ASTM D6304	>0.05	<b>0.009</b>	0.004	0.002
ppm Water	ppm	ASTM D6304	>500	<b>91</b>	42	24.4

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>---</b>	2311	557
Particles >6µm		ASTM D7647	>1300	<b>---</b>	515	118
Particles >14µm		ASTM D7647	>160	<b>---</b>	53	6
Particles >21µm		ASTM D7647	>40	<b>---</b>	18	1
Particles >38µm		ASTM D7647	>10	<b>---</b>	1	0
Particles >71µm		ASTM D7647	>3	<b>---</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>---</b>	18/16/13	16/14/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.43</b>	0.46	0.40


# OIL ANALYSIS REPORT

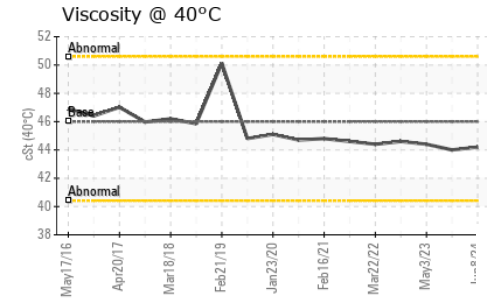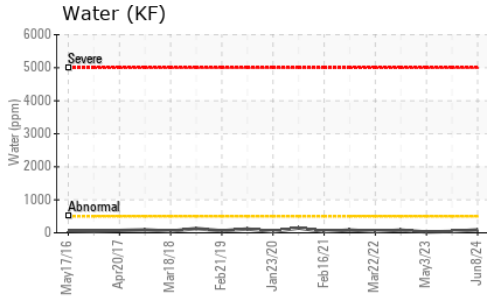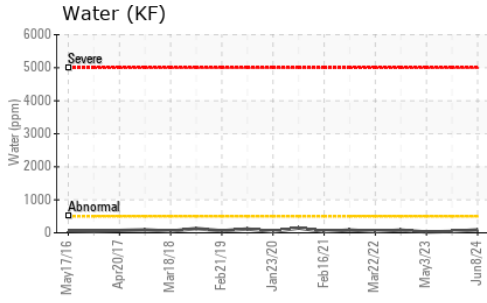





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.0	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

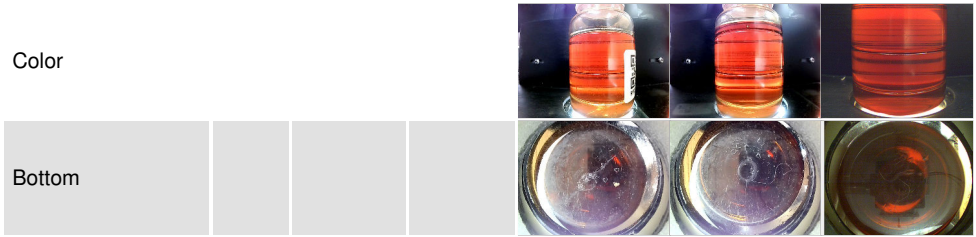

## GRAPHS

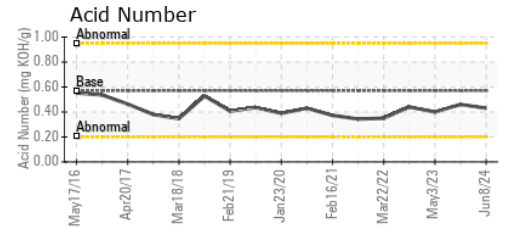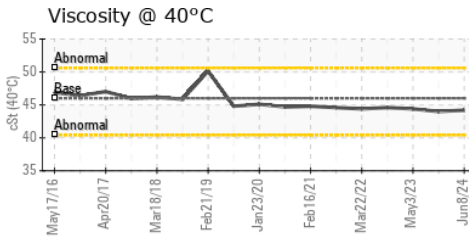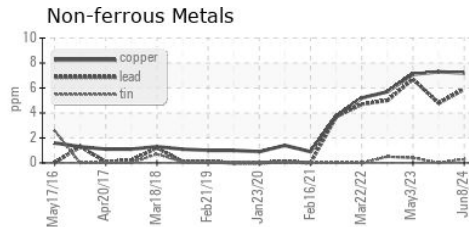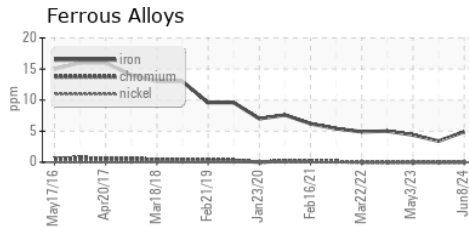

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0043252 **Received** : 12 Jun 2024  
**Lab Number** : 06208285 **Tested** : 14 Jun 2024  
**Unique Number** : 11075746 **Diagnosed** : 14 Jun 2024 - Don Baldrige  
**Test Package** : IND 2

**YANFENG AUTOMOTIVE INTERIORS**  
 1600 S. WASHINGTON AVE.  
 HOLLAND, MI  
 US 49423  
 Contact: JEFF HARRIS  
 jeffrey.harris@yanfeng.com  
 T: (616)915-4443  
 F: (616)394-1725

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)