




# OIL ANALYSIS REPORT

Sample Rating Trend

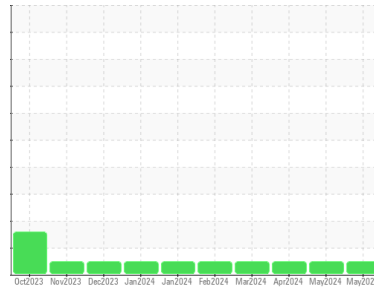

**NORMAL**



Machine Id

**1702**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0897850</b>	WC0897843	WC0897862
Sample Date	Client Info		<b>30 May 2024</b>	01 May 2024	03 Apr 2024
Machine Age	mls	Client Info	<b>487207</b>	0	0
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>10</b>	11	8
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	4	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>2</b>	0	2
Barium	ppm	ASTM D5185m 10	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 100	<b>54</b>	63	54
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 450	<b>911</b>	921	878
Calcium	ppm	ASTM D5185m 3000	<b>1028</b>	1083	1037
Phosphorus	ppm	ASTM D5185m 1150	<b>957</b>	1039	999
Zinc	ppm	ASTM D5185m 1350	<b>1248</b>	1189	1182
Sulfur	ppm	ASTM D5185m 4250	<b>3373</b>	3044	3238

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	13	10
Sodium	ppm	ASTM D5185m >158	<b>2</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	0

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	8.6	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.7</b>	22.9	22.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.2</b>	23.4	23.9
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>6.0</b>	7.1	6.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

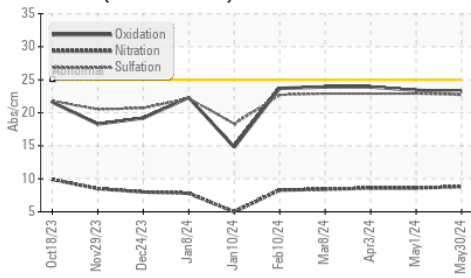

Base Number

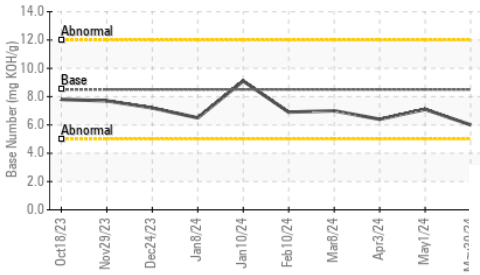


Viscosity @ 100°C

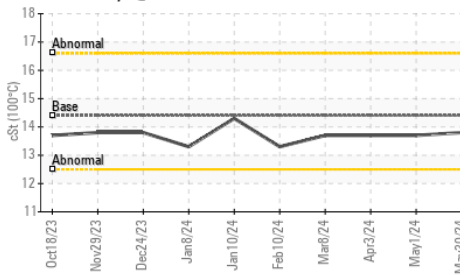

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.7

## GRAPHS

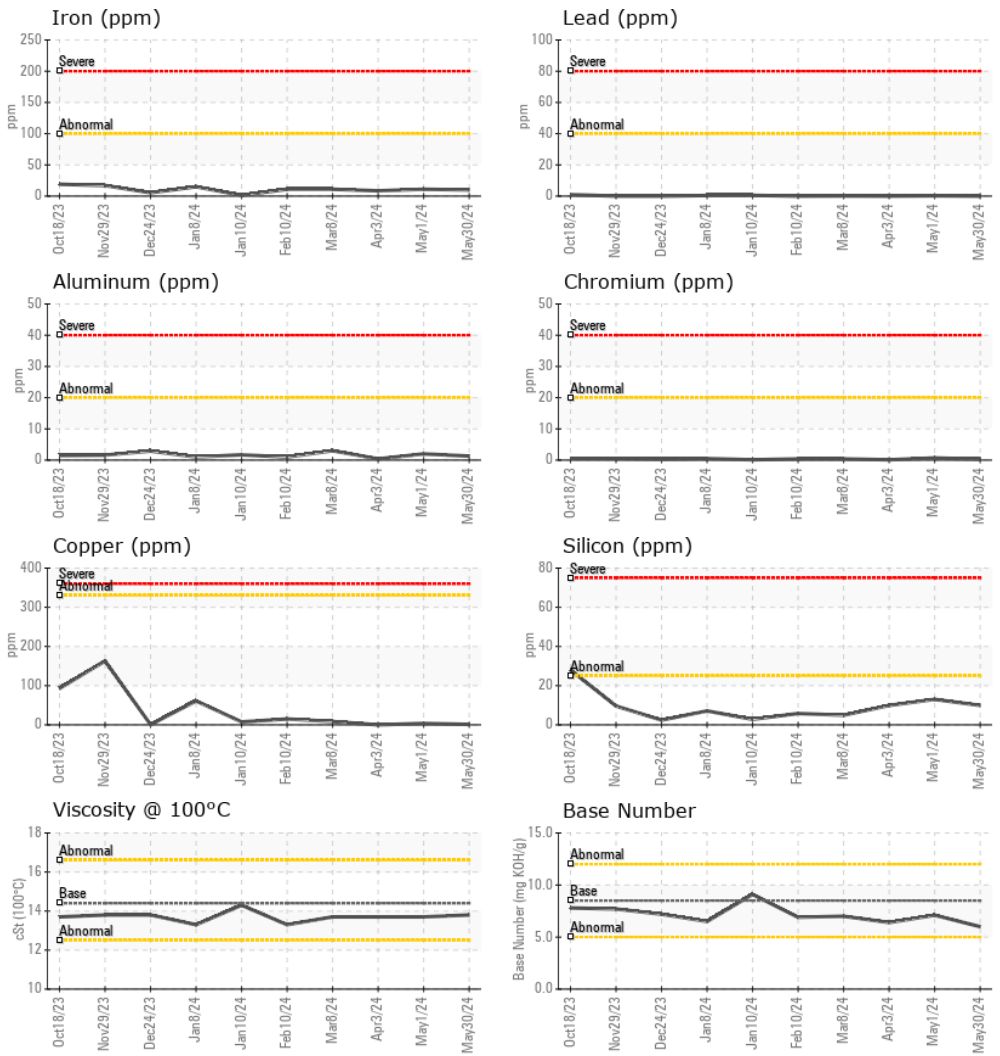

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0897850 **Received** : 12 Jun 2024  
**Lab Number** : 06208326 **Tested** : 14 Jun 2024  
**Unique Number** : 11075787 **Diagnosed** : 14 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**GO DURHAM - RAPT**  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701

Contact: Robert Losiniecki  
 Robert.losiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: