




# OIL ANALYSIS REPORT

Sample Rating Trend

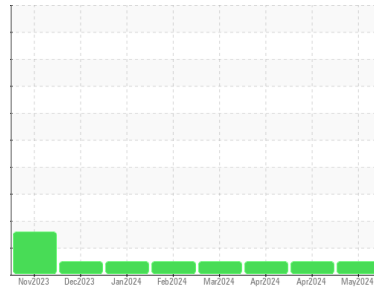

**NORMAL**



Machine Id

**1802**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>WC0897896</b>	WC0897879	WC0897919	
Sample Date	Client Info	<b>25 May 2024</b>	29 Apr 2024	01 Apr 2024	
Machine Age	mls	Client Info	<b>411642</b>	405573	399467
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>10</b>	11	7
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>41</b>	73	69
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>3</b>	<1	<1
Barium	ppm ASTM D5185m 10	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 100	<b>57</b>	60	52
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 450	<b>938</b>	871	851
Calcium	ppm ASTM D5185m 3000	<b>1059</b>	1082	1016
Phosphorus	ppm ASTM D5185m 1150	<b>969</b>	1036	901
Zinc	ppm ASTM D5185m 1350	<b>1275</b>	1193	1100
Sulfur	ppm ASTM D5185m 4250	<b>3300</b>	2961	3060

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>13</b>	18	9
Sodium	ppm ASTM D5185m >158	<b>2</b>	4	2
Potassium	ppm ASTM D5185m >20	<b>3</b>	13	0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>8.4</b>	8.4	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.0</b>	22.8	22.6


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>23.5</b>	23.1	22.8
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>6.0</b>	6.7	6.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

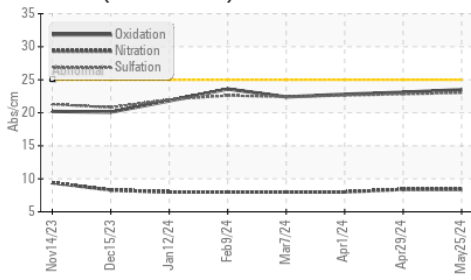

Base Number

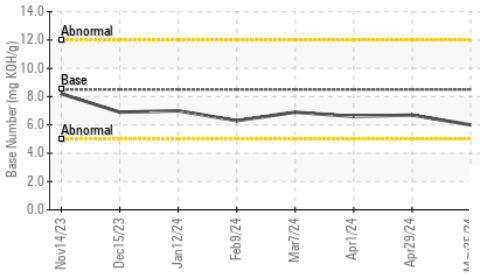









Viscosity @ 100°C

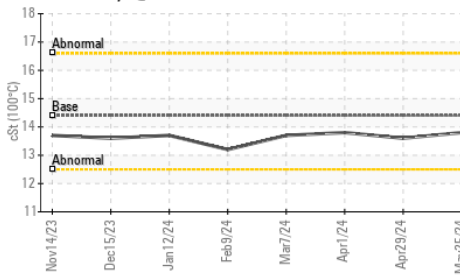

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.6

GRAPHS

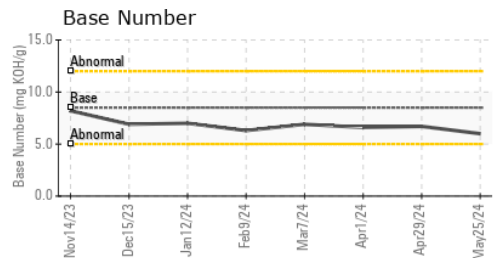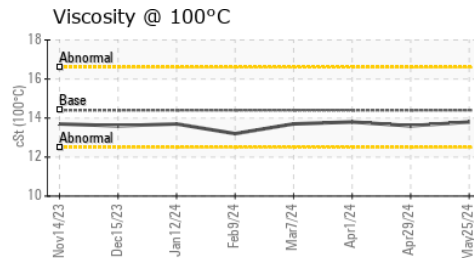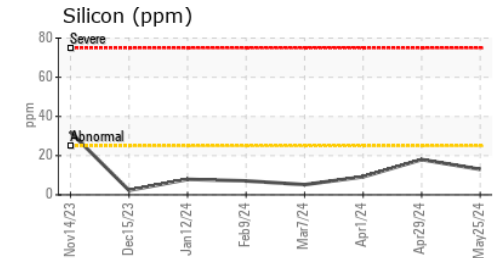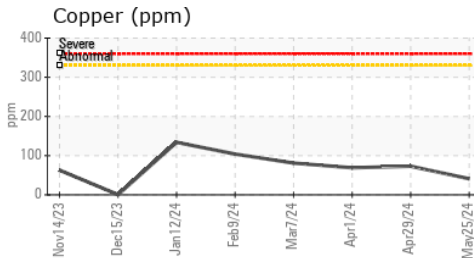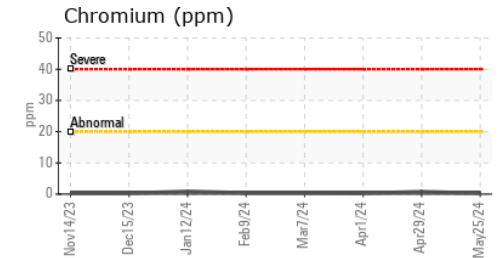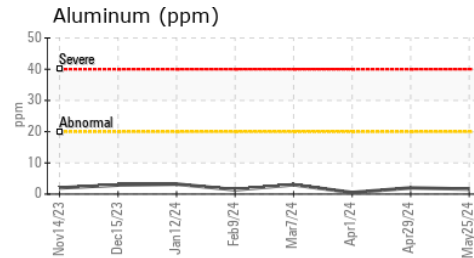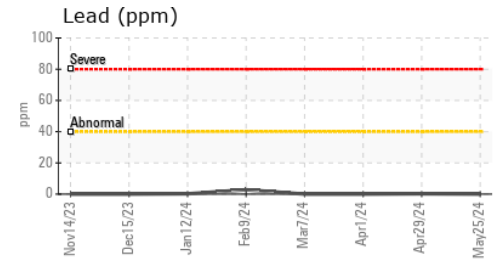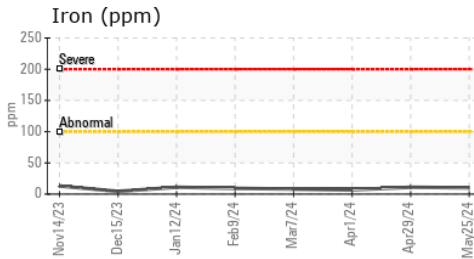

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0897896 Received : 12 Jun 2024  
 Lab Number : 06208328 Tested : 14 Jun 2024  
 Unique Number : 11075789 Diagnosed : 14 Jun 2024 - Wes Davis  
 Test Package : MOB 1 ( Additional Tests: TBN )

GO DURHAM - RAPT  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701  
 Contact: Robert Losiniecki  
 Robert.losiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: