




# OIL ANALYSIS REPORT

## Sample Rating Trend

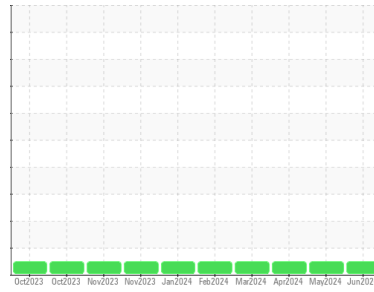

**NORMAL**



Machine Id

**2105**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0946476</b>	WC0897898	WC0897923
Sample Date	Client Info	<b>02 Jun 2024</b>	09 May 2024	16 Apr 2024
Machine Age	mls Client Info	<b>0</b>	174592	0
Oil Age	mls Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	N/A	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>3</b>	5	3
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>0</b>	1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>2</b>	0	<1
Barium	ppm ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>59</b>	58	53
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 450	<b>983</b>	935	874
Calcium	ppm ASTM D5185m 3000	<b>1093</b>	1133	1032
Phosphorus	ppm ASTM D5185m 1150	<b>1035</b>	1078	942
Zinc	ppm ASTM D5185m 1350	<b>1322</b>	1253	1127
Sulfur	ppm ASTM D5185m 4250	<b>3644</b>	3563	3292

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	7	7
Sodium	ppm ASTM D5185m >158	<b>2</b>	3	2
Potassium	ppm ASTM D5185m >20	<b>2</b>	3	0

### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.4	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>8.1</b>	8.5	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.2</b>	20.9	20.4


### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.6</b>	18.6	19.0
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>7.0</b>	8.0	7.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

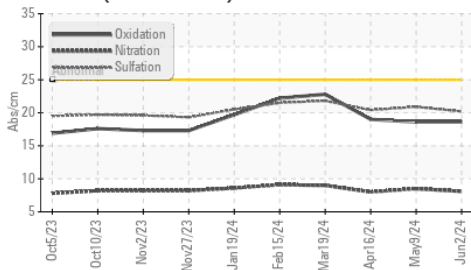

Base Number

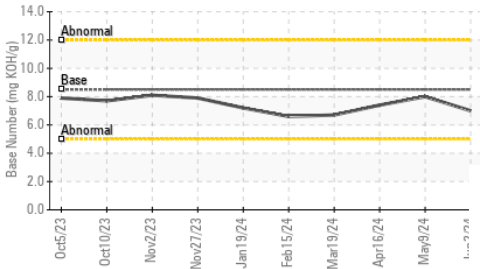









Viscosity @ 100°C

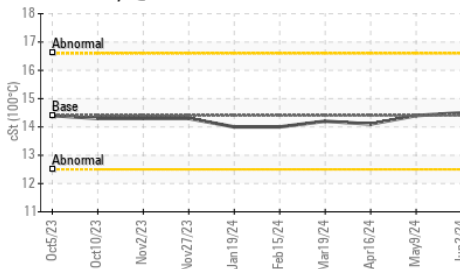

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.5	14.4

GRAPHS

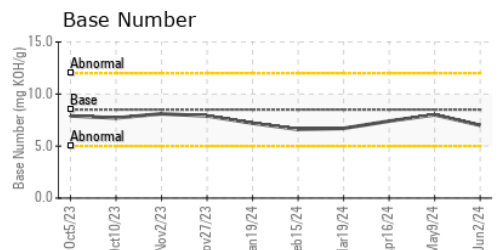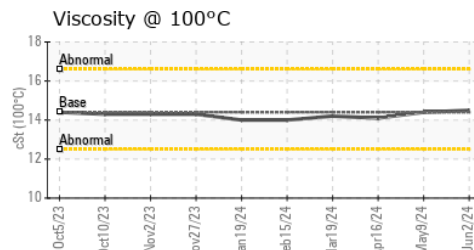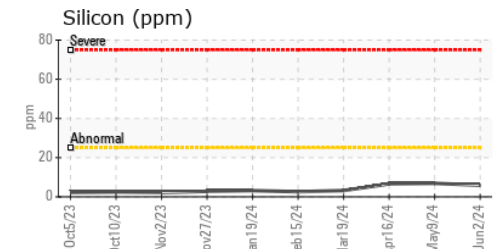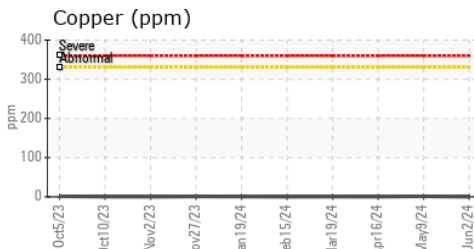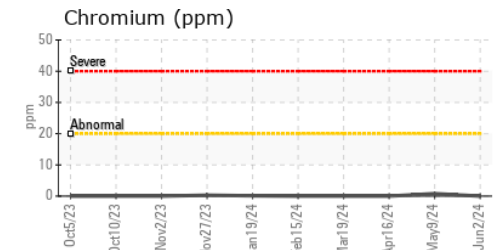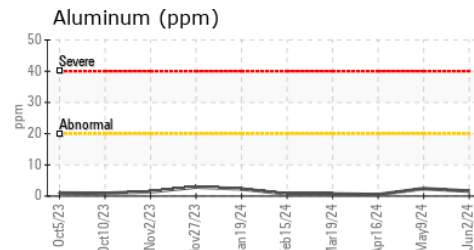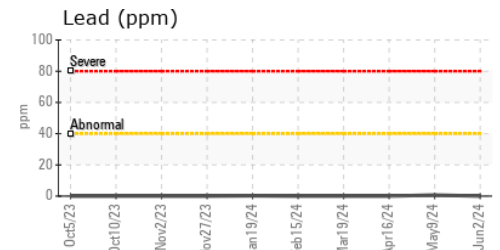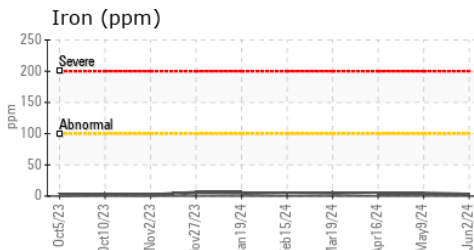

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0946476 Received : 12 Jun 2024  
 Lab Number : 06208329 Tested : 14 Jun 2024  
 Unique Number : 11075790 Diagnosed : 14 Jun 2024 - Wes Davis  
 Test Package : MOB 1 ( Additional Tests: TBN )

GO DURHAM - RAPT  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701

Contact: Robert Losiniecki  
 Robert.losiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: