




# OIL ANALYSIS REPORT



Area  
**KANSAS/44**  
 Machine Id  
**53.164L [KANSAS^44]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (3 GAL)**

Sample Rating Trend

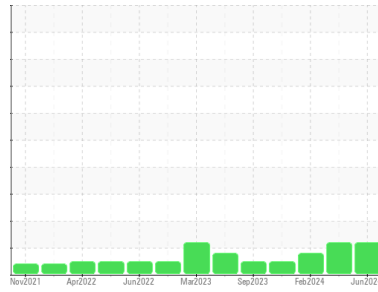

FUEL



## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0918235</b>	WC0918131	WC0862618
Sample Date	Client Info	<b>06 Jun 2024</b>	28 Mar 2024	26 Feb 2024
Machine Age	hrs	<b>2414</b>	0	1921
Oil Age	hrs	<b>3</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	MARGINAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>10</b>	6	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>46</b>	62	58
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>45</b>	39	42
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>574</b>	457	486
Calcium	ppm	ASTM D5185m	<b>1921</b>	1576	1611
Phosphorus	ppm	ASTM D5185m	<b>944</b>	676	786
Zinc	ppm	ASTM D5185m	<b>1082</b>	833	918
Sulfur	ppm	ASTM D5185m	<b>2903</b>	2338	2470

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>6</b>	6	7
Sodium	ppm	ASTM D5185m	<b>3</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Fuel	%	ASTM D3524 >5	<b>▲ 6.6</b>	▲ 5.1	▲ 2.6

## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	7.5	6.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.8</b>	22.3	21.7


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>26.3</b>	22.0	20.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>7.8</b>	9.3	9.4




# OIL ANALYSIS REPORT


## Fuel Dilution

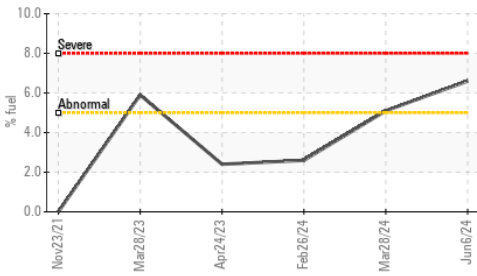


## FT-IR (Direct Trend)

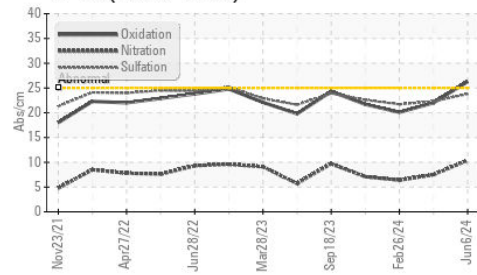

## FT-IR (Direct Trend)

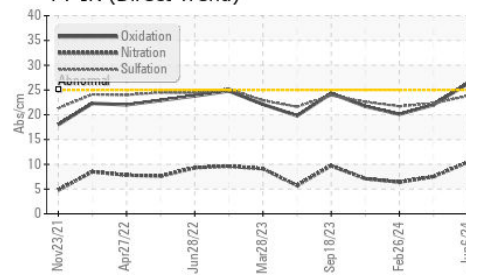

## Base Number

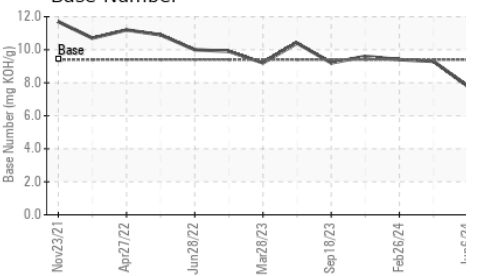


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14	▲ 12.0	▲ 11.8	12.2

## GRAPHS


### Ferrous Alloys

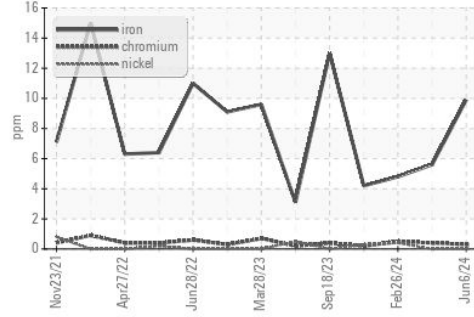


### Non-ferrous Metals

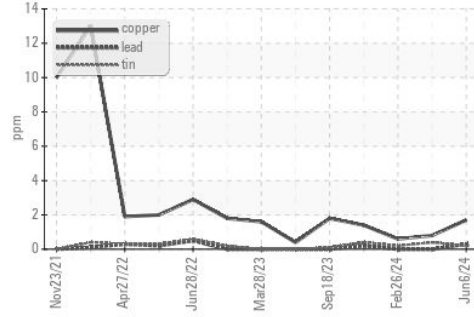

### Viscosity @ 100°C

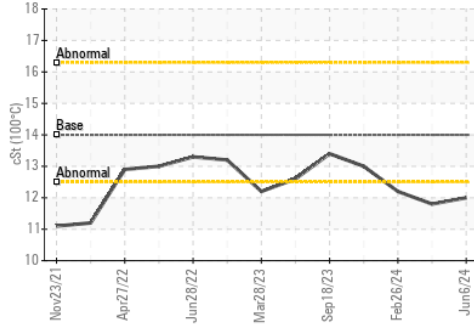

### Base Number

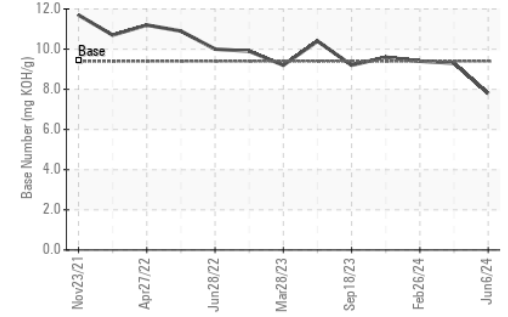

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0918235 **Received** : 13 Jun 2024  
**Lab Number** : 06208413 **Tested** : 19 Jun 2024  
**Unique Number** : 11075874 **Diagnosed** : 19 Jun 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PercentFuel, TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: RANDY ROBERTS  
 randy.roberts@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)