

OIL ANALYSIS REPORT

Area VACUUM PUMP B72429 MIDDLE ROTARY VANE PUMP

Component Vacuum Pump Fluid

BUSCH R530S (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

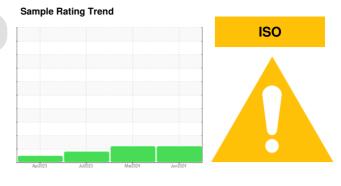

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0921369	WC0872483	WC0781483
Sample Date		Client Info		12 Jun 2024	11 Mar 2024	03 Jul 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water	v	WC Method		NEG	NEG	NEG
				-		
WEAR METALS		method	limit/base		history1	history2
Iron	ppm	ASTM D5185m	>20	10	15	3
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm		>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		<1	0	1
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m		0	0	0
Tin	ppm		>20	0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		<1	<1	3
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		3061	3784	4045
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	3	4
Sodium	ppm	ASTM D5185m		3	10	1
Potassium	ppm	ASTM D5185m	>20	0	4	1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u> </u>	12398	5238
Particles >6µm		ASTM D7647	>1300	<mark>)</mark> 2069	2209	1017
Particles >14µm		ASTM D7647	>160	114	81	16
Particles >21µm		ASTM D7647	>40	40	20	3
Particles >38µm		ASTM D7647	>10	2	1	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 21/18/14	2 1/18/14	20/17/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.48	0.31	0.042

Report Id: PAPOMA [WUSCAR] 06208685 (Generated: 06/15/2024 13:12:13) Rev: 1

Submitted By: Bryan Phillippe Page 1 of 2



(ju

imber of particles (1


90

80


Abn 85

Apr20/23

OIL ANALYSIS REPORT

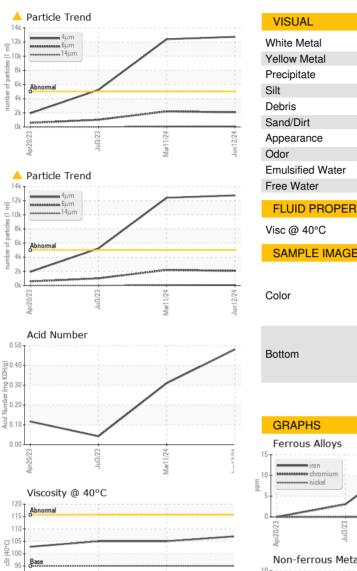

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	95.0	107	105	105
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				•		
Bottom						

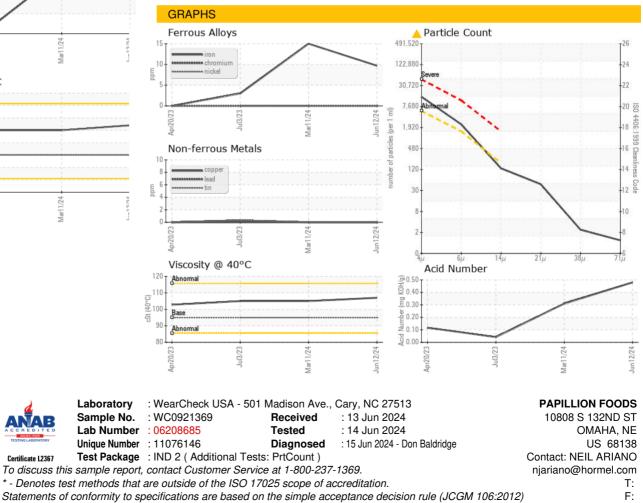

Submitted By: Bryan Phillippe