




# OIL ANALYSIS REPORT

Sample Rating Trend

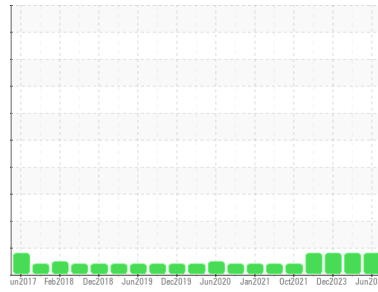

ISO



Area

## SPAM CANNING

Machine Id

### B58933 - HOPPER TWIN SCREW FOILER NORTH

Component

Gearbox

Fluid

PETRO CANADA PURITY FG EP GEAR OIL 220 (3 QTS)

#### DIAGNOSIS

##### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.

##### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0943531</b>	WC0894868	WC0872403
Sample Date	Client Info		<b>12 Jun 2024</b>	05 Mar 2024	25 Dec 2023
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ATTENTION

#### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

#### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>54</b>	62	14
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>3</b>	3	5
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>8</b>	10	9
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>200	<b>0</b>	0	0
Tin	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

#### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m		<b>36</b>	44	52
Phosphorus	ppm	ASTM D5185m		<b>585</b>	645	387
Zinc	ppm	ASTM D5185m		<b>4</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>749</b>	579	1016

#### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	2	5
Sodium	ppm	ASTM D5185m		<b>6</b>	6	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	2


#### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>110561</b>	110832	84503
Particles >6µm	ASTM D7647	>5000	<b>26381</b>	28480	6171
Particles >14µm	ASTM D7647	>640	<b>535</b>	544	91
Particles >21µm	ASTM D7647	>160	<b>83</b>	81	15
Particles >38µm	ASTM D7647	>40	<b>2</b>	3	0
Particles >71µm	ASTM D7647	>10	<b>1</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>--/19/16	<b>24/22/16</b>	24/22/16	24/20/14


#### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.51	<b>0.46</b>	0.46	0.42


### ▲ Particle Trend

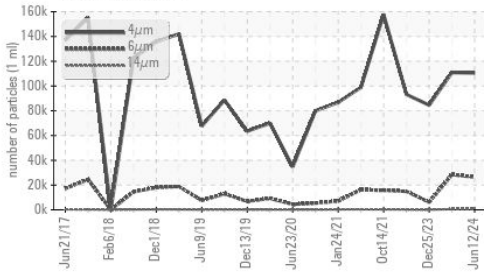


### ▲ Particle Trend

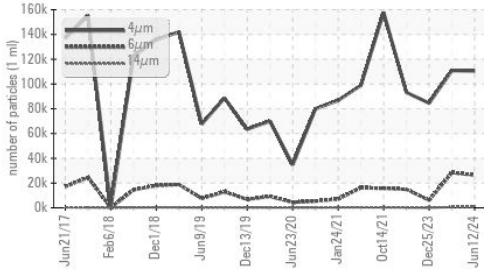

### Acid Number

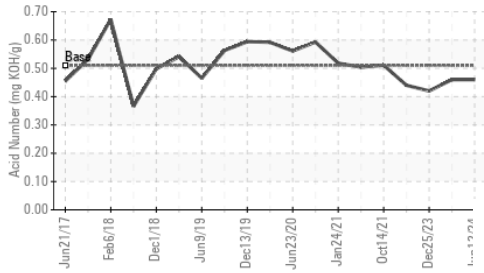

### Viscosity @ 40°C

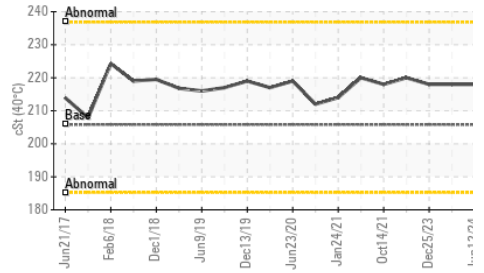

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	205.8	218	218

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




### GRAPHS


#### Ferrous Alloys

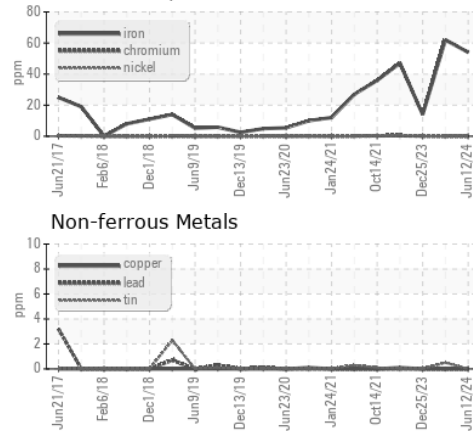


#### Non-ferrous Metals

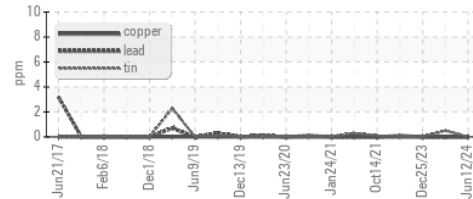


#### Viscosity @ 40°C

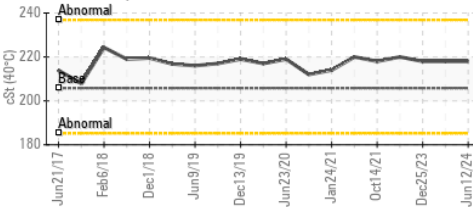

#### ▲ Particle Count

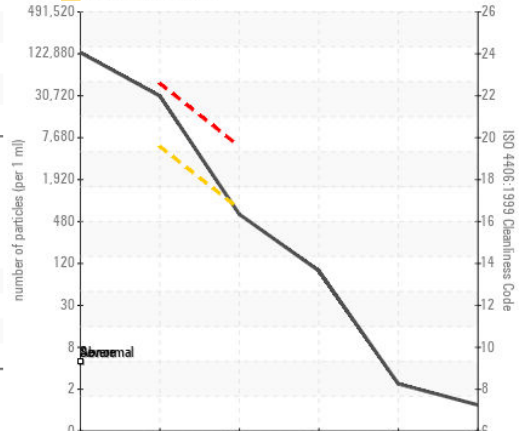

#### Acid Number

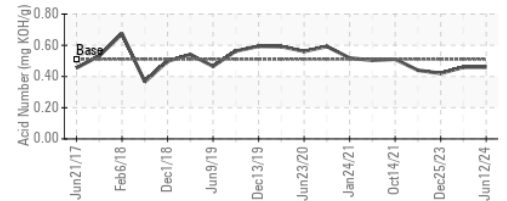

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0943531

Lab Number : 06208691

Unique Number : 11076152

Test Package : IND 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PROGRESSIVE PROCESSING INC

1205 CHAVENELLE CT

DUBUQUE, IA

US 52002

Contact: BLAINE PURDY

bepurdy@hormel.com

T: (563)557-4500

F: (563)557-4508