

OIL ANALYSIS REPORT



Machine Id Component Chiller Fluid

YORK TYPE K (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a trace of moisture present in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|----------|--------------|------------|-------------|-------------|----------|
| Sample Number | | Client Info | | WC0827402 | WC0836564 | |
| Sample Date | | Client Info | | 10 Jun 2024 | 09 Jan 2024 | |
| Machine Age | hrs | Client Info | | 10966 | 10192 | |
| Oil Age | hrs | Client Info | | 0 | 0 | |
| Oil Changed | | Client Info | | N/A | N/A | |
| Sample Status | | | | NORMAL | NORMAL | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | 2 | 2 | |
| Chromium | ppm | ASTM D5185m | >2 | 0 | <1 | |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | |
| Aluminum | ppm | ASTM D5185m | >3 | 0 | 2 | |
| Lead | ppm | ASTM D5185m | >2 | 0 | 0 | |
| Copper | ppm | ASTM D5185m | >8 | 0 | <1 | |
| Tin | ppm | ASTM D5185m | >4 | 0 | 0 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Magnesium | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Phosphorus | ppm | ASTM D5185m | 5 | 0 | 34 | |
| Zinc | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Sulfur | ppm | ASTM D5185m | 10 | 0 | 0 | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 4 | 22 | |
| Sodium | ppm | ASTM D5185m | | <1 | 0 | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 1 | |
| Water | % | ASTM D6304 | >0.03 | 0.032 | 0.030 | |
| ppm Water | ppm | ASTM D6304 | >300 | 329 | 303 | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 671 | 6908 | |
| Particles >6µm | | ASTM D7647 | >2500 | 103 | 1597 | |
| Particles >14µm | | ASTM D7647 | >320 | 5 | 39 | |
| Particles >21µm | | ASTM D7647 | >80 | 2 | 8 | |
| Particles >38µm | | ASTM D7647 | >20 | 0 | 1 | |
| Particles >71µm | | ASTM D7647 | >4 | 0 | 0 | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 17/14/10 | 20/18/12 | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.03 | 0.014 | 0.014 | |




OIL ANALYSIS REPORT





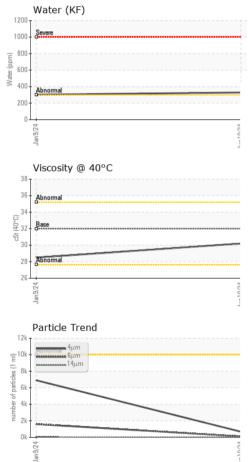

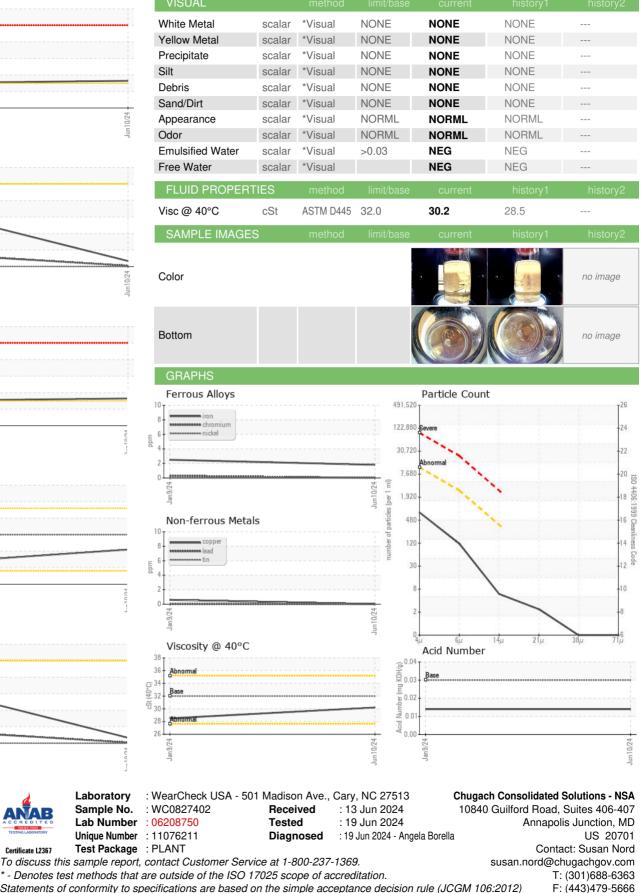

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CHUANN [WUSCAR] 06208750 (Generated: 06/21/2024 12:08:01) Rev: 1

Certificate 12367

Contact/Location: Susan Nord - CHUANN

Page 2 of 2