




# OIL ANALYSIS REPORT



Area  
**KANSAS/44/EG - EXCAVATOR**  
 Machine Id  
**20.304L [KANSAS^44^EG - EXCAVATOR]**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

Sample Rating Trend

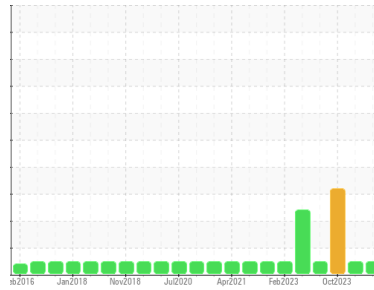

**NORMAL**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0918250</b>   | WC0832320   | WC0833895   |
| Sample Date   | Client Info |             | <b>06 Jun 2024</b> | 14 Nov 2023 | 30 Oct 2023 |
| Machine Age   | hrs         | Client Info | <b>8043</b>        | 7832        | 7855        |
| Oil Age       | hrs         | Client Info | <b>1039</b>        | 7004        | 851         |
| Oil Changed   | Client Info |             | <b>Not Changd</b>  | N/A         | Not Changd  |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | ABNORMAL    |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |     |
|----------|--------|-------------|---------|--------------|----------|-----|
| Iron     | ppm    | ASTM D5185m | >800    | <b>547</b>   | 661      | 581 |
| Chromium | ppm    | ASTM D5185m | >10     | <b>4</b>     | 5        | 5   |
| Nickel   | ppm    | ASTM D5185m | >5      | <b>0</b>     | 0        | <1  |
| Titanium | ppm    | ASTM D5185m | >15     | <b>2</b>     | 2        | 2   |
| Silver   | ppm    | ASTM D5185m | >2      | <b>0</b>     | 0        | 0   |
| Aluminum | ppm    | ASTM D5185m | >75     | <b>22</b>    | 24       | 24  |
| Lead     | ppm    | ASTM D5185m | >10     | <b>0</b>     | 0        | <1  |
| Copper   | ppm    | ASTM D5185m | >75     | <b>&lt;1</b> | <1       | 1   |
| Tin      | ppm    | ASTM D5185m | >8      | <b>&lt;1</b> | 0        | <1  |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | <1       | <1  |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0   |

## ADDITIVES

|            | method | limit/base  | current | history1     | history2 |       |
|------------|--------|-------------|---------|--------------|----------|-------|
| Boron      | ppm    | ASTM D5185m |         | <b>80</b>    | 71       | 77    |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>     | <1       | 0     |
| Molybdenum | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 1        | 0     |
| Manganese  | ppm    | ASTM D5185m |         | <b>6</b>     | 6        | 6     |
| Magnesium  | ppm    | ASTM D5185m |         | <b>23</b>    | 19       | 22    |
| Calcium    | ppm    | ASTM D5185m |         | <b>2013</b>  | 1934     | 1921  |
| Phosphorus | ppm    | ASTM D5185m |         | <b>1040</b>  | 1090     | 1086  |
| Zinc       | ppm    | ASTM D5185m |         | <b>834</b>   | 780      | 806   |
| Sulfur     | ppm    | ASTM D5185m |         | <b>23494</b> | 18685    | 19808 |

## CONTAMINANTS


|           | method | limit/base  | current | history1   | history2 |     |
|-----------|--------|-------------|---------|------------|----------|-----|
| Silicon   | ppm    | ASTM D5185m | >400    | <b>105</b> | 121      | 116 |
| Sodium    | ppm    | ASTM D5185m |         | <b>3</b>   | 6        | 4   |
| Potassium | ppm    | ASTM D5185m | >20     | <b>15</b>  | 15       | 16  |

## VISUAL

|                  | method | limit/base | current | history1     | history2 |       |
|------------------|--------|------------|---------|--------------|----------|-------|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | MODER    | NONE  |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    | NORML |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    | NORML |
| Emulsified Water | scalar | *Visual    | >0.2    | <b>NEG</b>   | NEG      | NEG   |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | NEG      | NEG   |



# OIL ANALYSIS REPORT

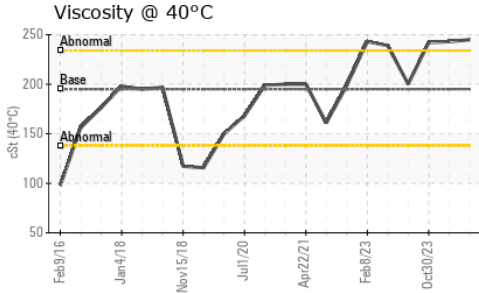




### FLUID PROPERTIES

| method      | limit/base    | current | history1   | history2 |
|-------------|---------------|---------|------------|----------|
| Visc @ 40°C | cSt ASTM D445 | 195     | <b>245</b> | 243      |

### SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color  |            |         | no image | no image |
| Bottom |            |         | no image | no image |

### GRAPHS

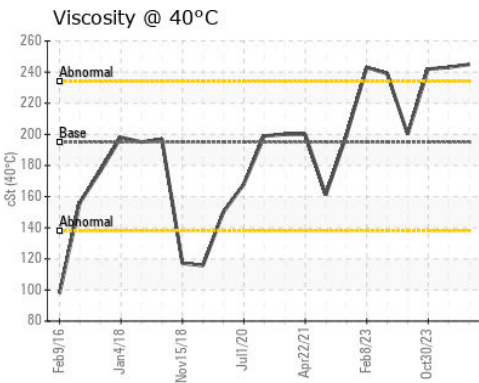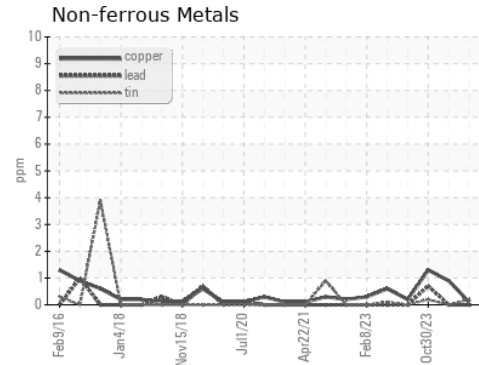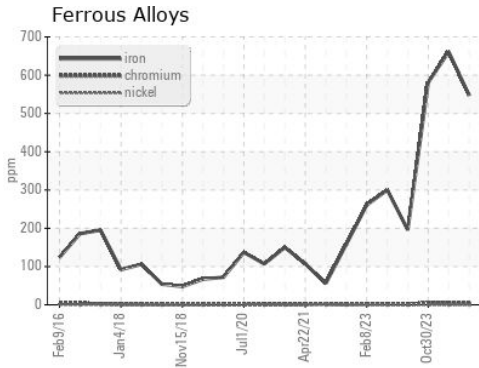

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0918250  
**Lab Number** : 06209036  
**Unique Number** : 11076497  
**Test Package** : CONST

**Received** : 13 Jun 2024  
**Tested** : 14 Jun 2024  
**Diagnosed** : 14 Jun 2024 - Angela Borella

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)