




OIL ANALYSIS REPORT

Sample Rating Trend

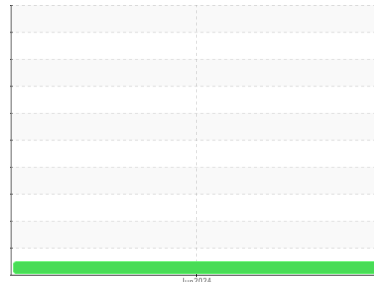

NORMAL



Area
38850 TRACE PO 37552 [38850]

Machine Id
PAOTS0002-06112024TS2B

Component
Hydraulic System

Fluid
0001748229 CASTROL BRAYCO MICRONIC 889 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

NAS 1638 Class: 4, Discrete particle counts [100 ml] 5-15µm = 1389, 15-25µm = 287, 25-50µm = 119, 50-100µm = 17, >100µm = 0. The system cleanliness is acceptable for your target SAE AS4059 (replaces NAS 1638) cleanliness code. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC06209078	---	---
Sample Date	Client Info		11 Jun 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	---	---
Chromium	ppm	ASTM D5185m >20	0	---	---
Nickel	ppm	ASTM D5185m >20	<1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	0	---	---
Lead	ppm	ASTM D5185m >20	0	---	---
Copper	ppm	ASTM D5185m >20	0	---	---
Tin	ppm	ASTM D5185m >20	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	2	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	<1	---	---
Calcium	ppm	ASTM D5185m	0	---	---
Phosphorus	ppm	ASTM D5185m	0	---	---
Zinc	ppm	ASTM D5185m	<1	---	---
Sulfur	ppm	ASTM D5185m	0	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	1	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---
Water	%	ASTM D6304 >0.05	0.001	---	---
ppm Water	ppm	ASTM D6304 >500	10	---	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles 5-15µm	count	*NAS 1638 >8000	1389	---	---
Particles 15-25µm	count	*NAS 1638 >1425	287	---	---
Particles 25-50µm	count	*NAS 1638 >253	119	---	---
Particles 50-100µm	count	*NAS 1638 >45	17	---	---
Particles >100µm	count	*NAS 1638 >8	0	---	---
NAS 1638	Class	*NAS 1638 >5	4	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.047	---	---



OIL ANALYSIS REPORT

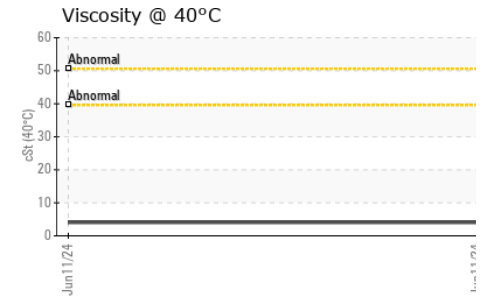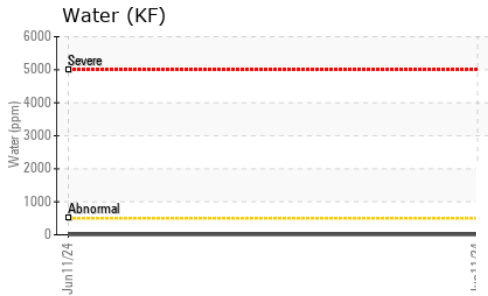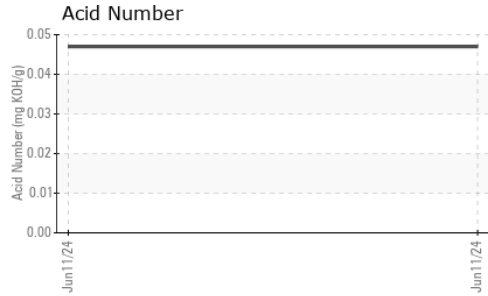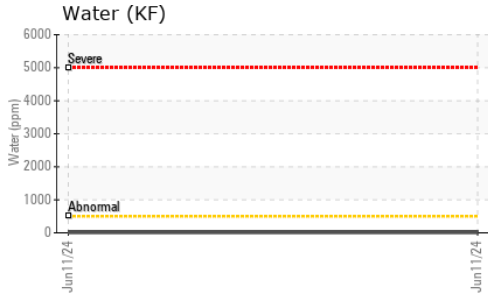






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	4.06	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

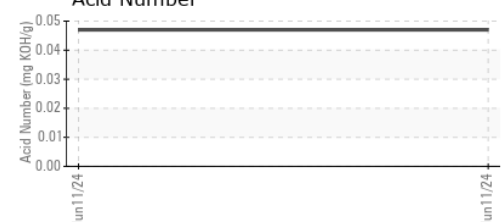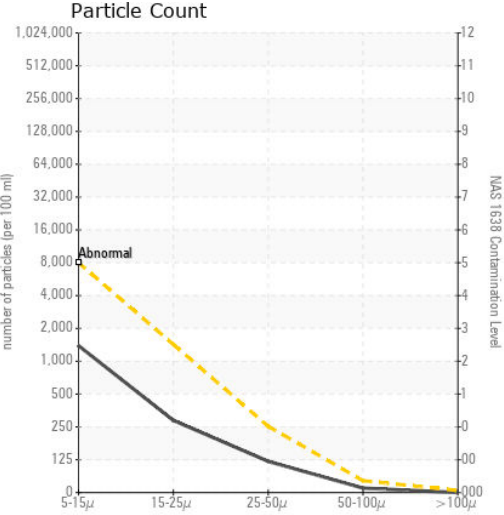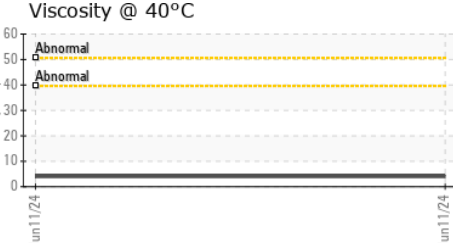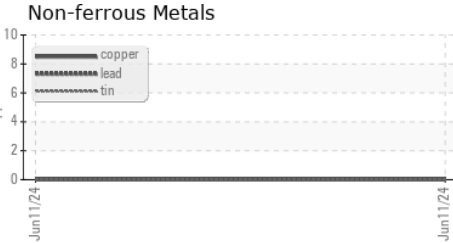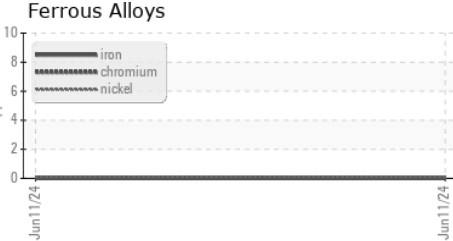

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06209078 **Received** : 13 Jun 2024
Lab Number : 06209078 **Tested** : 19 Jun 2024
Unique Number : 11076539 **Diagnosed** : 19 Jun 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCountNAS)

RIDGE ENGINEERING
 3987 HAMPSTEAD-MEXICO RD
 HAMPSTEAD, MD
 US 21074
 Contact: BETHANY HUGHES*
 bethany@ridgeeng.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: