


OIL ANALYSIS REPORT

Sample Rating Trend

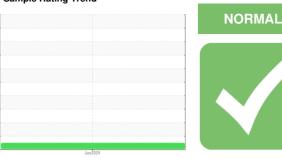

Machine Id 73-PC-24 (S/N 36)

Hydraulic System

MIL-PRF-83282 (--- LTR)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service. Chlorine 28.0 ppm.

				Jun2024		
				Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0933775		
Sample Date		Client Info		08 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		2		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		903		
Zinc	ppm	ASTM D5185m		7		
Sulfur	ppm	ASTM D5185m		162		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	9		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	3		
Chlorine Content	ppm	ASTM D5185m		28.0		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	171		
Particles >6µm		ASTM D7647	>1300	40		
Particles >14µm		ASTM D7647	>160	5		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/12/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A - ! - N / A N)	I/OII/-	ACTM DODAE	0.4	0.700		


Acid Number (AN)

mg KOH/g ASTM D8045 0.1

0.792



OIL ANALYSIS REPORT

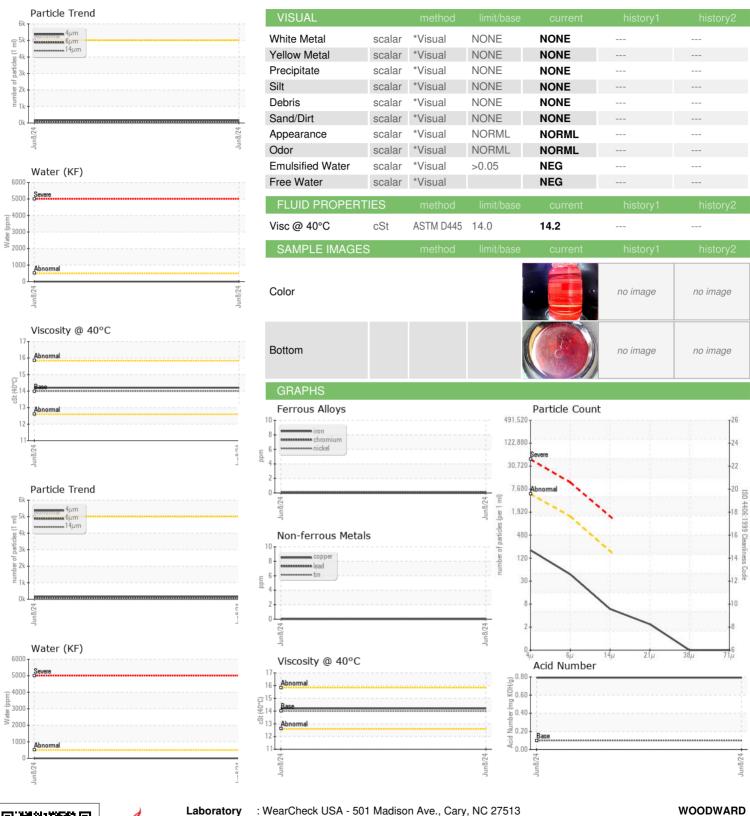



Certificate 12367

Laboratory Sample No.

Lab Number : 06209084

: WC0933775 Unique Number : 11076545

Received **Tested** Diagnosed

: 13 Jun 2024 : 19 Jun 2024

: 19 Jun 2024 - Jonathan Hester

Contact: REYNARD GOLDMAN reynard.goldman@woodward.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Test Package : PLANT (Additional Tests: chlorinexrf)

Report Id: WOOSANCA [WUSCAR] 06209084 (Generated: 06/19/2024 16:14:54) Rev: 1

Contact/Location: REYNARD GOLDMAN - WOOSANCA

US 91355

25200 W RYE CANYON RD

SANTA CLARITA, CA

T: (661)702-5991