



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id

## 76-PC-24 (S/N 429)

Component

### Hydraulic System

Fluid

### MILITARY MIL-PRF-87257 (--- LTR)

#### DIAGNOSIS

##### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.

##### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service. Chlorine 1.3 ppm.

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0933778</b>	---	---
Sample Date	Client Info		<b>08 Jun 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

#### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	---	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >20	<b>0</b>	---	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>2</b>	---	---

#### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>732</b>	---	---
Zinc	ppm	ASTM D5185m	<b>5</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>133</b>	---	---

#### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Chlorine Content	ppm	ASTM D5185m	<b>1.30</b>	---	---
Water	%	ASTM D6304 >0.05	<b>NEG</b>	---	---

#### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>7347</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>1894</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>48</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>4</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>20/18/13</b>	---	---

#### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.622</b>	---	---



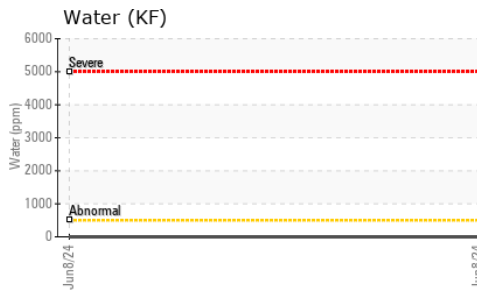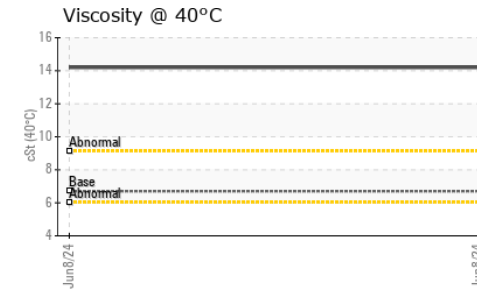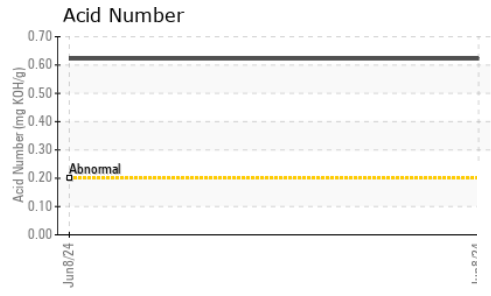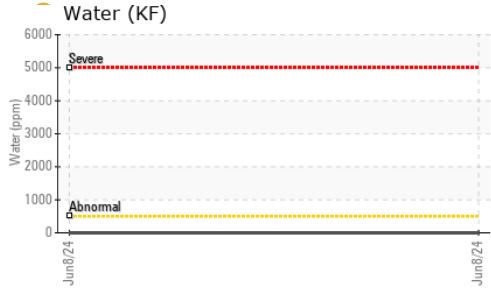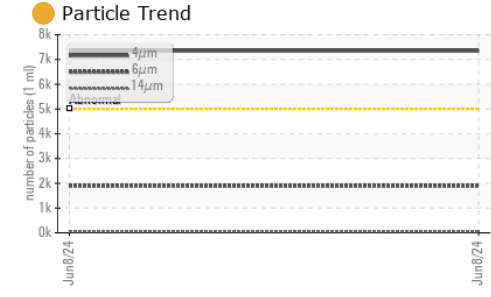

# OIL ANALYSIS REPORT







VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	6.7	14.2	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

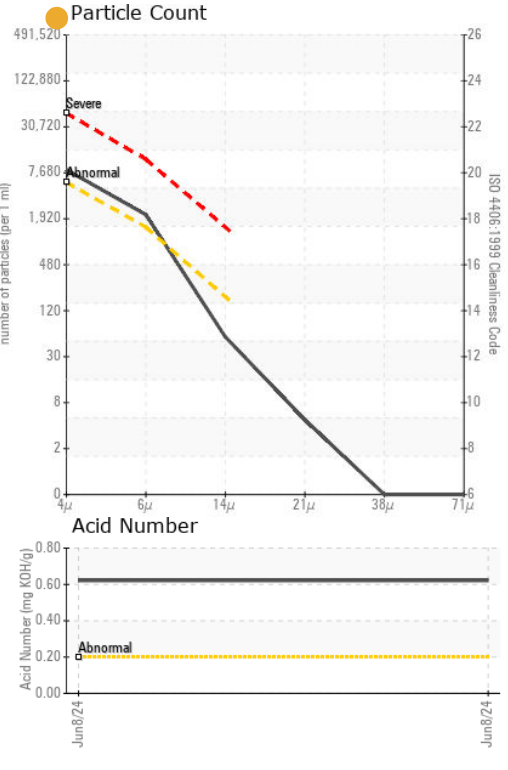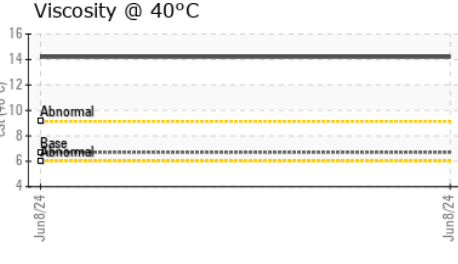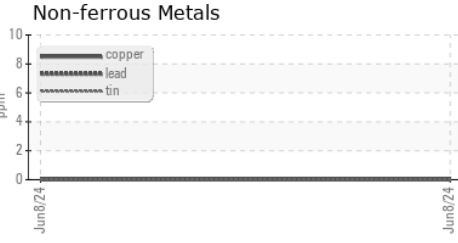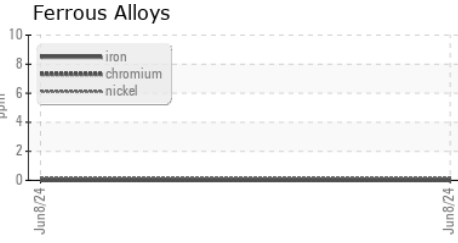

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0933778      **Received** : 13 Jun 2024  
**Lab Number** : 06209085      **Tested** : 19 Jun 2024  
**Unique Number** : 11076546      **Diagnosed** : 19 Jun 2024 - Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: chlorinexrf )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**WOODWARD**  
 25200 W RYE CANYON RD  
 SANTA CLARITA, CA  
 US 91355  
 Contact: REYNARD GOLDMAN  
 reynard.goldman@woodward.com  
 T: (661)702-5991  
 F: