




# OIL ANALYSIS REPORT

Sample Rating Trend

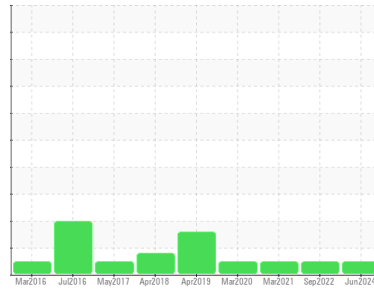

**NORMAL**



Area

**FAIRWIND [200009521]**

Machine Id

**04WEA84129 (S/N 72802187743)**

Component

**Hydraulic System**

Fluid

**SHELL TELLUS S4 VX 32 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>NX012321</b>    | NX004173    | NX007136    |
| Sample Date   | Client Info |             | <b>03 Jun 2024</b> | 21 Sep 2022 | 09 Mar 2021 |
| Machine Age   | hrs         | Client Info | <b>63204</b>       | 51326       | 38291       |
| Oil Age       | hrs         | Client Info | <b>63204</b>       | 51326       | 38291       |
| Oil Changed   | Client Info |             | <b>Not Changed</b> | Not Changd  | Not Changed |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## WEAR METALS

|          | method     | limit/base      | current      | history1 | history2 |
|----------|------------|-----------------|--------------|----------|----------|
| PQ       | ASTM D8184 |                 | <b>20</b>    | 16       | 19       |
| Iron     | ppm        | ASTM D5185m >20 | <b>12</b>    | 8        | 13       |
| Chromium | ppm        | ASTM D5185m >20 | <b>&lt;1</b> | <1       | <1       |
| Nickel   | ppm        | ASTM D5185m >20 | <b>0</b>     | 0        | 0        |
| Titanium | ppm        | ASTM D5185m     | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm        | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Aluminum | ppm        | ASTM D5185m >20 | <b>2</b>     | <1       | 0        |
| Lead     | ppm        | ASTM D5185m >20 | <b>3</b>     | 1        | 3        |
| Copper   | ppm        | ASTM D5185m >20 | <b>&lt;1</b> | 0        | <1       |
| Tin      | ppm        | ASTM D5185m >20 | <b>2</b>     | 1        | 2        |
| Antimony | ppm        | ASTM D5185m     | <b>---</b>   | ---      | 0        |
| Vanadium | ppm        | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm        | ASTM D5185m     | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base  | current    | history1 | history2 |
|------------|--------|-------------|------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Barium     | ppm    | ASTM D5185m | <b>0</b>   | <1       | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>   | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m | <b>1</b>   | 2        | <1       |
| Calcium    | ppm    | ASTM D5185m | <b>0</b>   | 5        | 0        |
| Phosphorus | ppm    | ASTM D5185m | <b>483</b> | 456      | 498      |
| Zinc       | ppm    | ASTM D5185m | <b>88</b>  | 98       | 93       |
| Sulfur     | ppm    | ASTM D5185m | <b>934</b> | 1365     | 1036     |

## CONTAMINANTS





|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >15  | <b>6</b>     | 5        | 4        |
| Sodium    | ppm    | ASTM D5185m      | <b>0</b>     | 2        | 0        |
| Potassium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | 0        | 0        |
| Water     | %      | ASTM D6304 >0.05 | <b>0.010</b> | 0.006    | 0.007    |
| ppm Water | ppm    | ASTM D6304 >500  | <b>107</b>   | 60.9     | 72.5     |

## FLUID CLEANLINESS

|                 | method       | limit/base | current         | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm  | ASTM D7647   | >20000     | <b>1832</b>     | 4887     | 3043     |
| Particles >6µm  | ASTM D7647   | >2500      | <b>402</b>      | 1110     | 357      |
| Particles >14µm | ASTM D7647   | >320       | <b>18</b>       | 59       | 28       |
| Particles >21µm | ASTM D7647   | >80        | <b>5</b>        | 11       | 7        |
| Particles >38µm | ASTM D7647   | >20        | <b>1</b>        | 1        | 0        |
| Particles >71µm | ASTM D7647   | >4         | <b>0</b>        | 0        | 0        |
| Oil Cleanliness | ISO 4406 (c) | >21/18/15  | <b>18/16/11</b> | 19/17/13 | 19/16/12 |



# OIL ANALYSIS REPORT

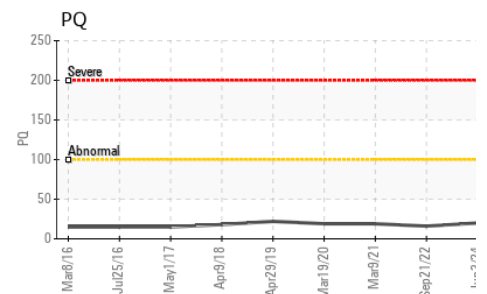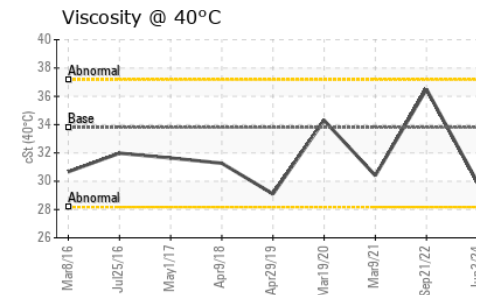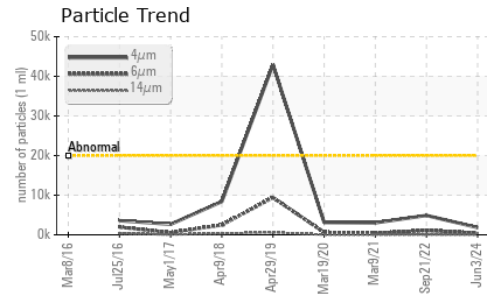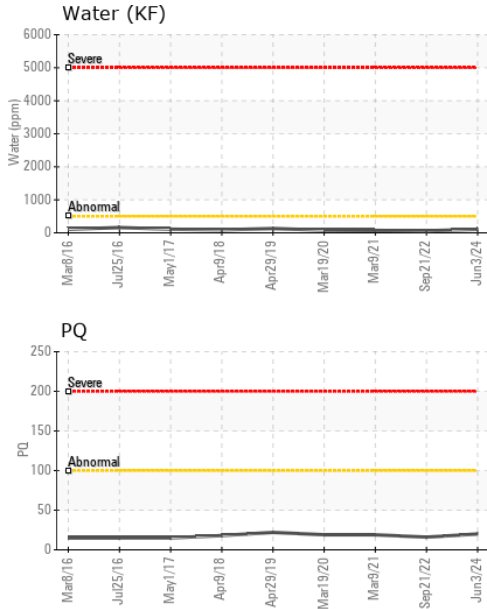


| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>0.16</b> | 0.20     | 0.162    |






| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual | >0.05      | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES |     | method    | limit/base | current     | history1 | history2 |
|------------------|-----|-----------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt | ASTM D445 | 33.8       | <b>29.9</b> | 36.5     | 30.4     |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

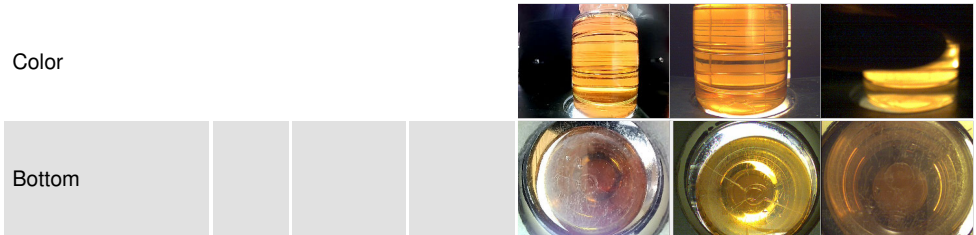

## GRAPHS

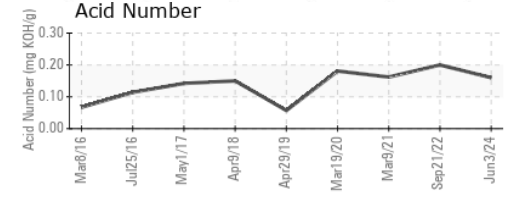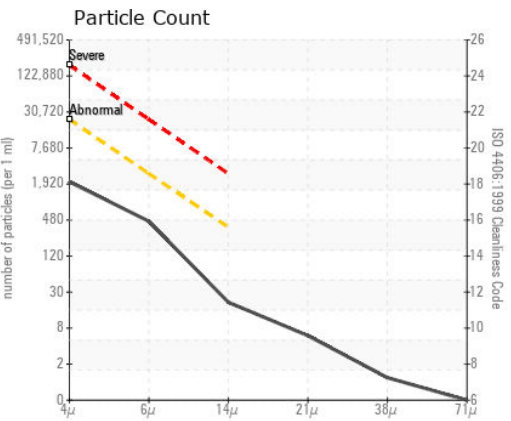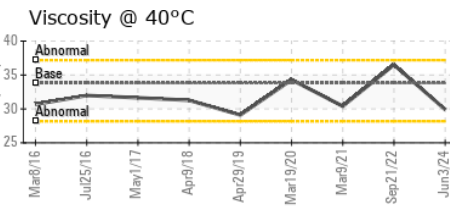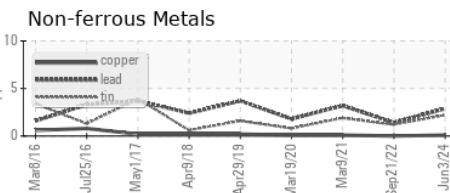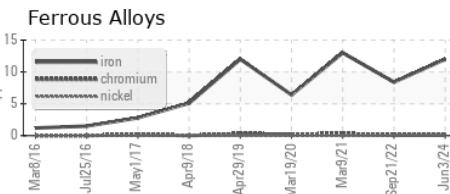

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : NX012321  
**Lab Number** : 06209214  
**Unique Number** : 11076675  
**Test Package** : IND 2 ( Additional Tests: KF, PQ )

**NORDEX USA - Chicago**  
 300 SOUTH WACKER DRIVE, SUITE 1500  
 CHICAGO, IL  
 US 60606

Contact: DEVIN LINEHAN  
 DLinehan@nordex-online.com

T: (312)386-4124

F: (312)386-7102

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)