




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

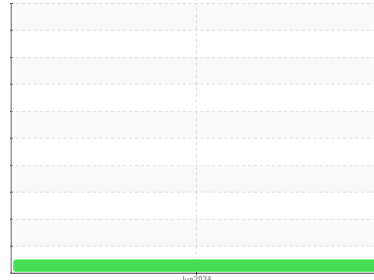

Area

[W/O 10897]

Machine Id

VOLVO A45G 352606

Component

Drop Box

Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (2 GAL)



DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Confirm oil type. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0002256	---	---
Sample Date	Client Info		04 Jun 2024	---	---
Machine Age	hrs	Client Info	4115	---	---
Oil Age	hrs	Client Info	4115	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	357	---	---
Chromium	ppm	ASTM D5185m >20	4	---	---
Nickel	ppm	ASTM D5185m >10	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >30	0	---	---
Lead	ppm	ASTM D5185m >30	0	---	---
Copper	ppm	ASTM D5185m >30	10	---	---
Tin	ppm	ASTM D5185m >20	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	125	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	16	---	---
Manganese	ppm	ASTM D5185m	5	---	---
Magnesium	ppm	ASTM D5185m	8	---	---
Calcium	ppm	ASTM D5185m	37	---	---
Phosphorus	ppm	ASTM D5185m	1143	---	---
Zinc	ppm	ASTM D5185m	51	---	---
Sulfur	ppm	ASTM D5185m	27172	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	19	---	---
Sodium	ppm	ASTM D5185m	4	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---




OIL ANALYSIS REPORT

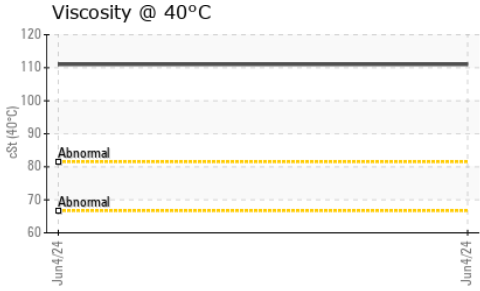

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	111	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

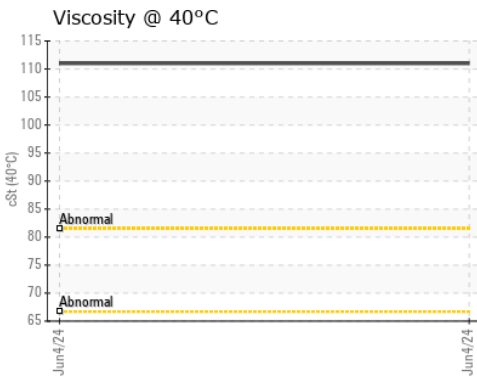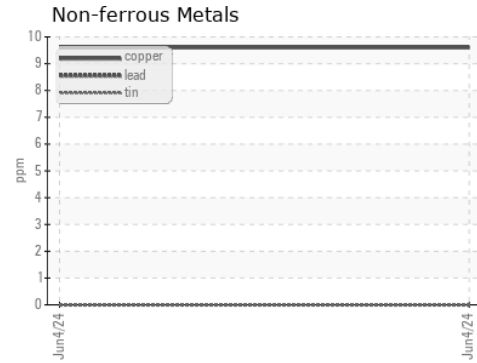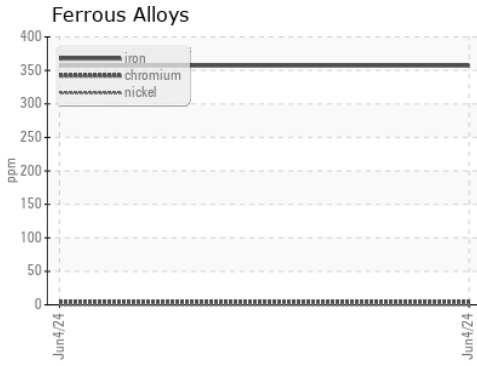

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002256
Lab Number : 06209387
Unique Number : 11076848
Test Package : CONST

Received : 13 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 17 Jun 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE
 4601 WASHINGTON BOULEVARD
 BALTIMORE, MD
 US 21227
 Contact: DELANO GREGORY
 dgregory@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (410)242-7835