




OIL ANALYSIS REPORT

Sample Rating Trend

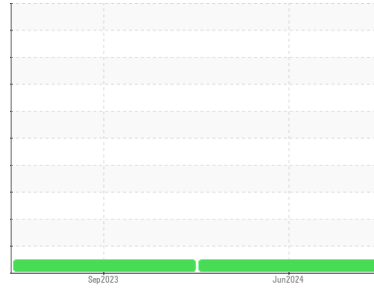

NORMAL



Machine Id
442103 - PETERBILT TRACK TRUCK
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON ADVANCED 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			SBP0006745	SBP0004567	---
Sample Date	Client Info			10 Jun 2024	22 Sep 2023	---
Machine Age	hrs	Client Info		891	378	---
Oil Age	hrs	Client Info		513	378	---
Oil Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	31	57	---
Chromium	ppm	ASTM D5185m	>20	1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	25	56	---
Lead	ppm	ASTM D5185m	>40	1	4	---
Copper	ppm	ASTM D5185m	>330	148	345	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		2	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	6	58	---
Barium	ppm	ASTM D5185m	0	<1	0	---
Molybdenum	ppm	ASTM D5185m	60	55	35	---
Manganese	ppm	ASTM D5185m	0	2	6	---
Magnesium	ppm	ASTM D5185m	1010	912	686	---
Calcium	ppm	ASTM D5185m	1070	1163	1513	---
Phosphorus	ppm	ASTM D5185m	1150	902	788	---
Zinc	ppm	ASTM D5185m	1270	1162	936	---
Sulfur	ppm	ASTM D5185m	2060	3269	3792	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	23	---
Sodium	ppm	ASTM D5185m		4	7	---
Potassium	ppm	ASTM D5185m	>20	85	202	---


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	9.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0	20.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	15.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.0	6.6	5.9	---




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

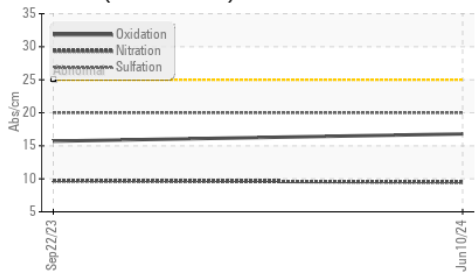

Base Number

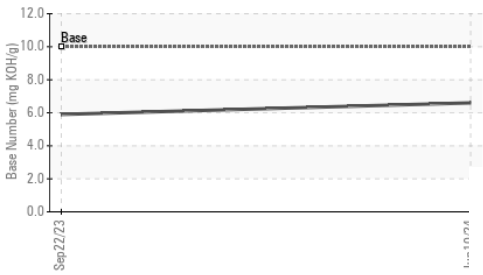

Viscosity @ 100°C

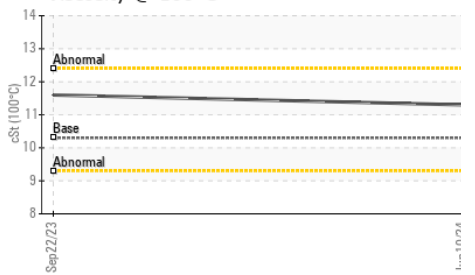


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.3	11.3	11.6

GRAPHS


Ferrous Alloys

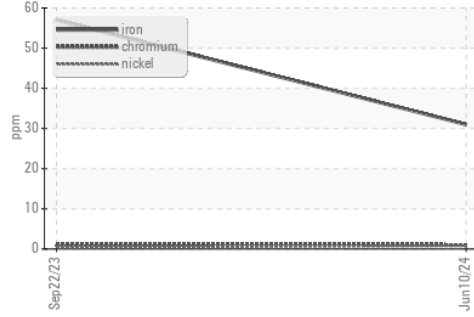


Non-ferrous Metals

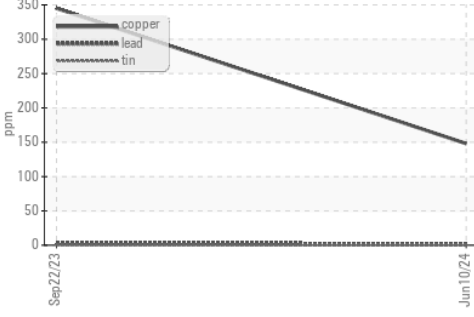

Viscosity @ 100°C

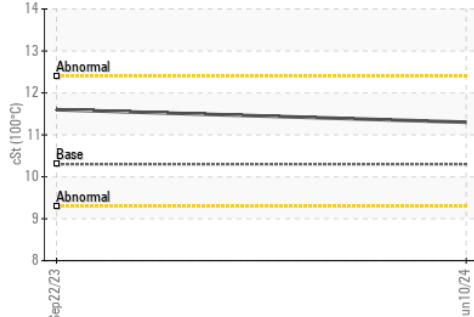

Base Number

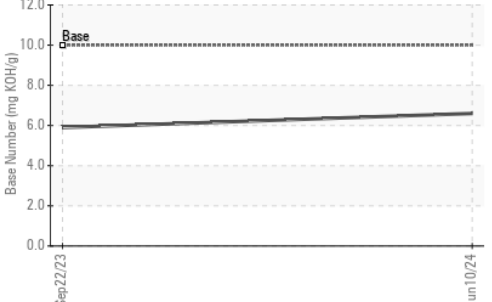

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0006745 **Received** : 13 Jun 2024
Lab Number : 06209439 **Tested** : 15 Jun 2024
Unique Number : 11076900 **Diagnosed** : 15 Jun 2024 - Wes Davis
Test Package : FLEET

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Loren Michael
 LorenM@constructorslincoln.com
 T: (402)434-2157
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)