




# OIL ANALYSIS REPORT

## Sample Rating Trend

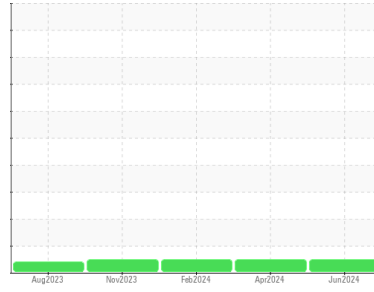

**NORMAL**



Machine Id

**2332**

Component

**Diesel Engine**

Fluid

**CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0944459</b>	WC0859257	WC0829006
Sample Date	Client Info		<b>06 Jun 2024</b>	23 Apr 2024	02 Feb 2024
Machine Age	mls	Client Info	<b>89404</b>	78290	54596
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>8</b>	17	17
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m	<b>7</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	7	6
Lead	ppm	ASTM D5185m >40	<b>3</b>	8	7
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>2</b>	<1	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>209</b>	242	197
Barium	ppm	ASTM D5185m	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	<b>74</b>	129	117
Manganese	ppm	ASTM D5185m	<b>1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>617</b>	693	640
Calcium	ppm	ASTM D5185m	<b>1534</b>	1555	1422
Phosphorus	ppm	ASTM D5185m 760	<b>767</b>	864	701
Zinc	ppm	ASTM D5185m 800	<b>925</b>	916	829
Sulfur	ppm	ASTM D5185m 3000	<b>3176</b>	3235	2317

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	11	9
Sodium	ppm	ASTM D5185m	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>8</b>	9	9

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.0</b>	9.1	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.9</b>	24.2	24.3

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.0</b>	19.3	19.4
Base Number (BN)	mg KOH/g	ASTM D2896 10	<b>7.4</b>	7.3	6.7







# OIL ANALYSIS REPORT

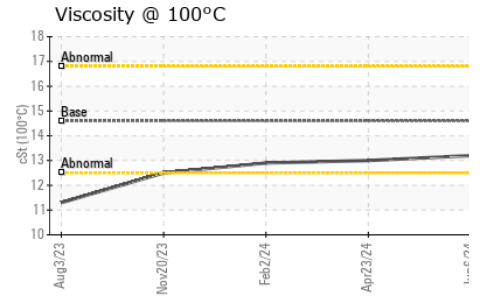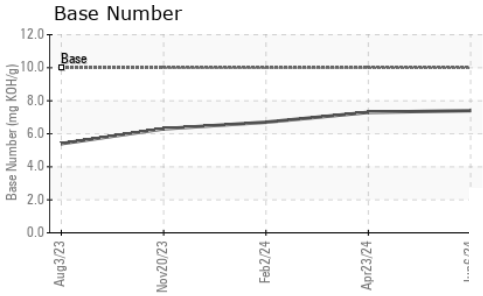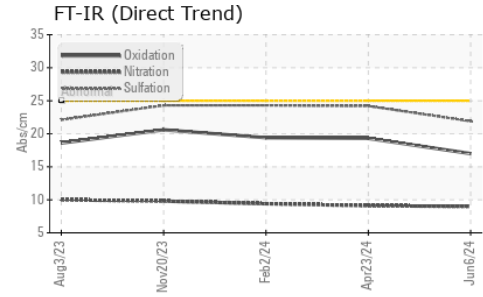

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.6	13.2	13.0

## GRAPHS

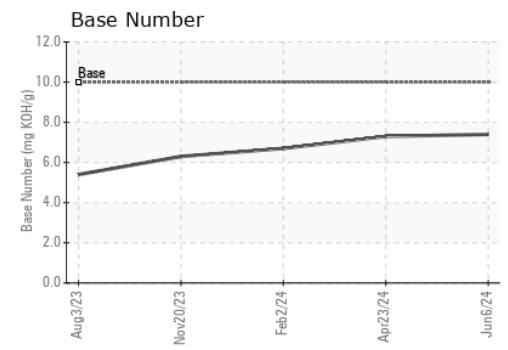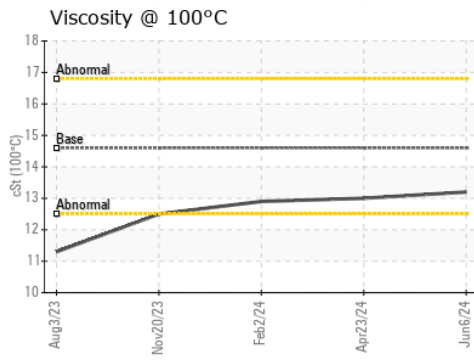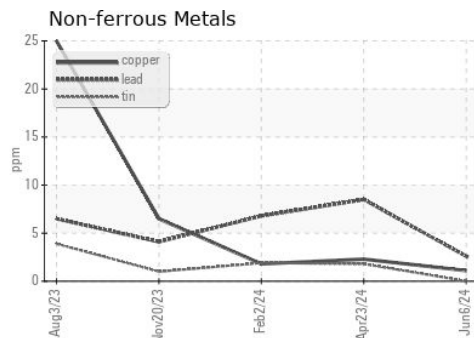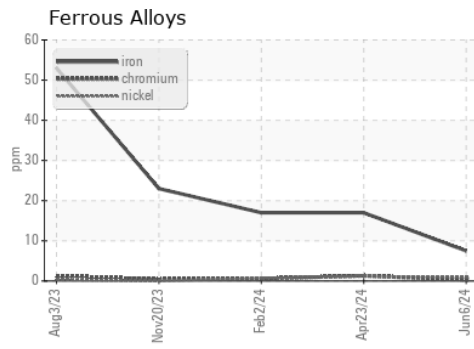

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0944459  
**Lab Number** : 06209538  
**Unique Number** : 11076999  
**Test Package** : FLEET  
**Received** : 13 Jun 2024  
**Tested** : 15 Jun 2024  
**Diagnosed** : 15 Jun 2024 - Wes Davis

**Ergon Trucking Inc. - MAG601**  
 11337 State Route 800  
 Magnolia, OH  
 US 44643  
 Contact: Eddy Smith  
 eddy.smith@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)