

OIL ANALYSIS REPORT



Machine Id

FSP144313

Component Diesel Engine Fluid DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

📥 Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Fuel content negligible. Elemental levels of silicon (Si) and aluminum (AI) indicate alumina-silicate (coarse dirt) ingress.


Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0932970		
Sample Date		Client Info		28 May 2024		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>100	122		
Chromium	ppm ppm	ASTM D5185m	>20	4		
Nickel		ASTM D5185m	>20	4		
Titanium	ppm	ASTM D5185m	>4	، <1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm		>3	0 15		
Lead	ppm ppm	ASTM D5185m	>20	<1		
Copper		ASTM D5185m		125		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm ppm	ASTM D5185m	>15	0		
Cadmium	ppm	ASTM D5185m		2		
ADDITIVES	ppin	method	limit/base			history 0
				current	history1	history2
Boron	ppm	ASTM D5185m	250	16		
Barium	ppm			7		
Molybdenum	ppm	ASTM D5185m	100	50		
Manganese	ppm	ASTM D5185m	450	8		
Magnesium	ppm	ASTM D5185m	450 3000	820		
Calcium	ppm	ASTM D5185m		1294		
Phosphorus	ppm	ASTM D5185m	1150	670		
Zinc Sulfur	ppm	ASTM D5185m ASTM D5185m	1350 4250	874 2319		
	ppm					
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<u> </u>		
Sodium	ppm	ASTM D5185m	>158	10		
Potassium	ppm	ASTM D5185m	>20	25		
Fuel	%	ASTM D3524	>5	1.3		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8		
Nitration	Abs/cm	*ASTM D7624	>20	14.1		
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.8		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
FLUID DEGRADA	TION Abs/.1mm	method *ASTM D7414	limit/base	current 24.0	history1	history2



OIL ANALYSIS REPORT

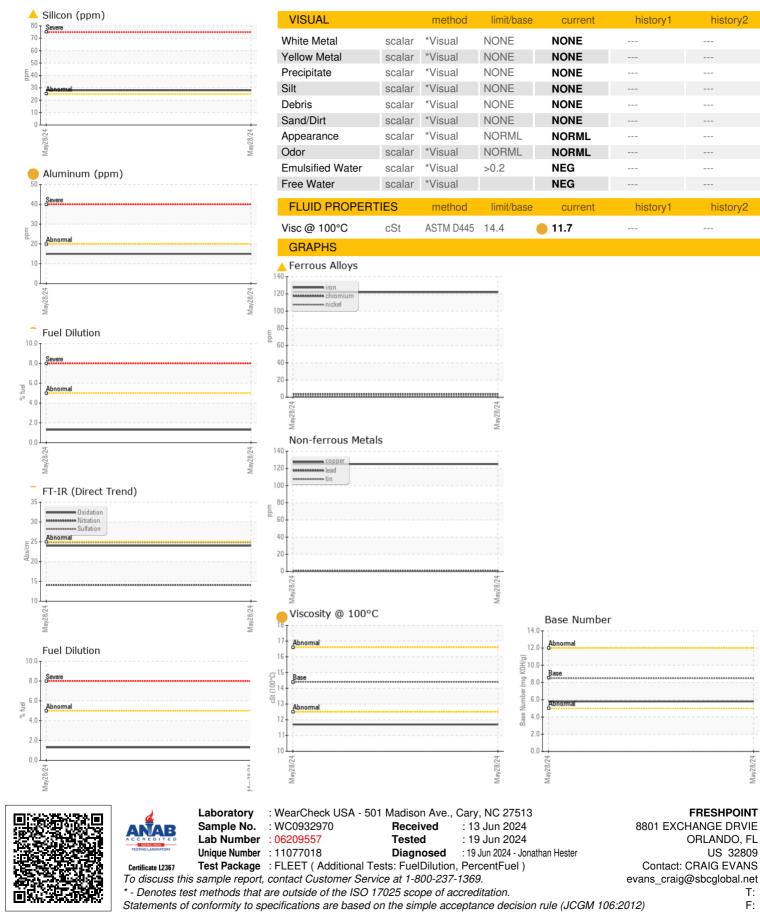

Report Id: FREORL [WUSCAR] 06209557 (Generated: 06/22/2024 06:35:39) Rev: 1

Contact/Location: CRAIG EVANS - FREORL