




FUEL REPORT

Sample Rating Trend

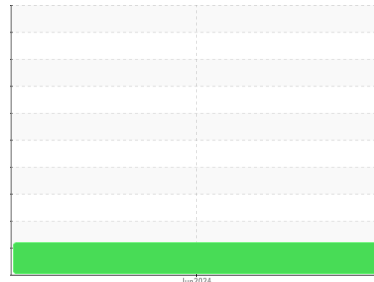

ISO



Machine Id
KIOTI XW86-00033

Component
Diesel Fuel

Fluid
No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)

DIAGNOSIS

Recommendation

We advise that you filter this fluid before use. All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is a moderate amount of particulates present in the fuel. There is no bacteria or fungus (yeast and/or mold) present in the sample. The water content is negligible. There is no indication of any contamination in the fuel.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info | KT0001504 | --- | --- |
| Sample Date | Client Info | 13 Jun 2024 | --- | --- |
| Machine Age | hrs Client Info | 157 | --- | --- |
| Sample Status | | ABNORMAL | --- | --- |

PHYSICAL PROPERTIES

| method | limit/base | current | history1 | history2 |
|----------------------------|---------------------|---------|-------------|----------|
| Fuel Color | text *Visual Screen | Yellow | Red | --- |
| ASTM Color | scalar *ASTM D1500 | | L4.5 | --- |
| Visc @ 40°C | cSt ASTM D445 | 3.0 | 2.26 | --- |
| Pensky-Martens Flash Point | °C *PMCC Calculated | 52 | 61 | --- |

SULFUR CONTENT

| method | limit/base | current | history1 | history2 |
|--------------|-----------------|---------|-----------|----------|
| Sulfur | ppm ASTM D5185m | 10 | 79 | --- |
| Sulfur (UVF) | ppm ASTM D5453 | | 59 | --- |

DISTILLATION

| method | limit/base | current | history1 | history2 |
|------------------------|-------------|---------|------------|----------|
| Initial Boiling Point | °C ASTM D86 | 165 | 172 | --- |
| 5% Distillation Point | °C ASTM D86 | | 193 | --- |
| 10% Distill Point | °C ASTM D86 | 201 | 201 | --- |
| 15% Distillation Point | °C ASTM D86 | | 208 | --- |
| 20% Distill Point | °C ASTM D86 | 216 | 215 | --- |
| 30% Distill Point | °C ASTM D86 | 230 | 228 | --- |
| 40% Distill Point | °C ASTM D86 | 243 | 240 | --- |
| 50% Distill Point | °C ASTM D86 | 255 | 252 | --- |
| 60% Distill Point | °C ASTM D86 | 267 | 264 | --- |
| 70% Distill Point | °C ASTM D86 | 280 | 277 | --- |
| 80% Distill Point | °C ASTM D86 | 295 | 292 | --- |
| 85% Distillation Point | °C ASTM D86 | | 301 | --- |
| 90% Distill Point | °C ASTM D86 | 310 | 311 | --- |
| 95% Distillation Point | °C ASTM D86 | | 328 | --- |
| Final Boiling Point | °C ASTM D86 | 341 | 345 | --- |

IGNITION QUALITY






| method | limit/base | current | history1 | history2 |
|--------------|------------|---------|-----------|----------|
| API Gravity | ASTM D7777 | 37.7 | 36 | --- |
| Cetane Index | ASTM D4737 | <40.0 | 45 | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-------------|-----------------|---------|--------------|----------|
| Silicon | ppm ASTM D5185m | <1.0 | <1 | --- |
| Sodium | ppm ASTM D5185m | <0.1 | 2 | --- |
| Potassium | ppm ASTM D5185m | <0.1 | 3 | --- |
| Water | % ASTM D6304 | <0.05 | 0.003 | --- |
| ppm Water | ppm ASTM D6304 | <500 | 27 | --- |
| % Gasoline | % *In-House | <0.50 | 0.0 | --- |
| % Biodiesel | % *In-House | <20.0 | 0.0 | --- |



FUEL REPORT

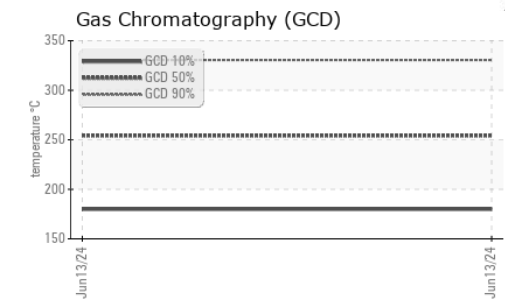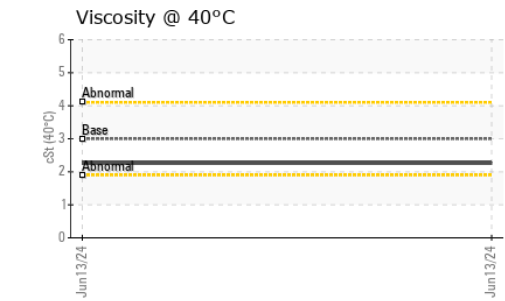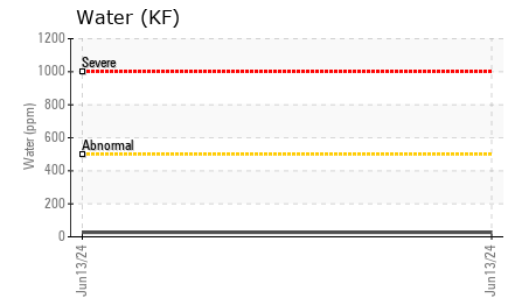
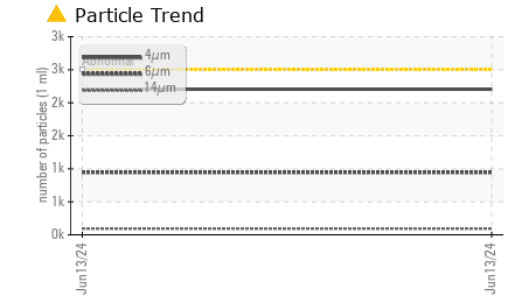
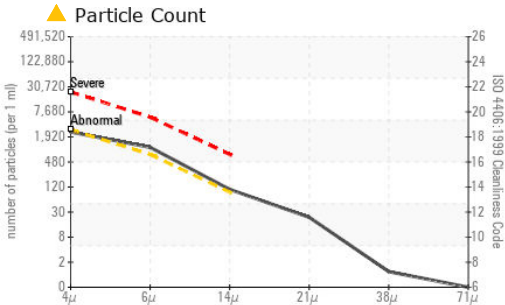


| FLUID CLEANLINESS | method | limit/base | current | history1 | history2 |
|-------------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | >2500 | 2205 | --- | --- |
| Particles >6µm | ASTM D7647 | >640 | ▲ 946 | --- | --- |
| Particles >14µm | ASTM D7647 | >80 | ▲ 93 | --- | --- |
| Particles >21µm | ASTM D7647 | >20 | 20 | --- | --- |
| Particles >38µm | ASTM D7647 | >4 | 1 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >18/16/13 | ▲ 18/17/14 | --- | --- |

| HEAVY METALS | method | limit/base | current | history1 | history2 |
|--------------|--------|------------------|--------------|----------|----------|
| Aluminum | ppm | ASTM D5185m <0.1 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m <0.1 | <1 | --- | --- |
| Lead | ppm | ASTM D5185m <0.1 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m <0.1 | 0 | --- | --- |
| Iron | ppm | ASTM D5185m <0.1 | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m <0.1 | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m <0.1 | 1 | --- | --- |
| Phosphorus | ppm | ASTM D5185m <0.1 | 0 | --- | --- |
| Zinc | ppm | ASTM D5185m <0.1 | 2 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color | | | | | |
| Bottom | | | | | |

GRAPHS

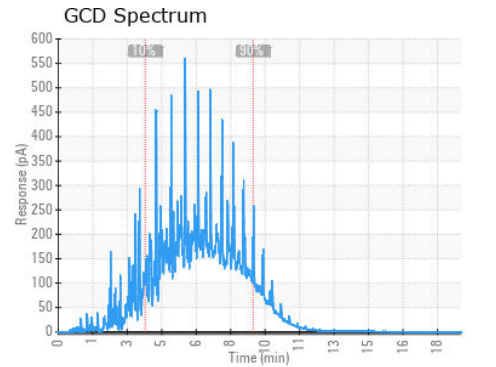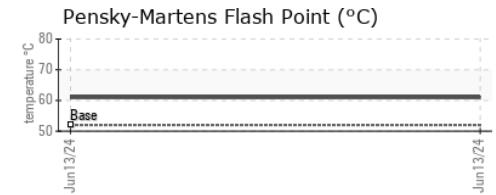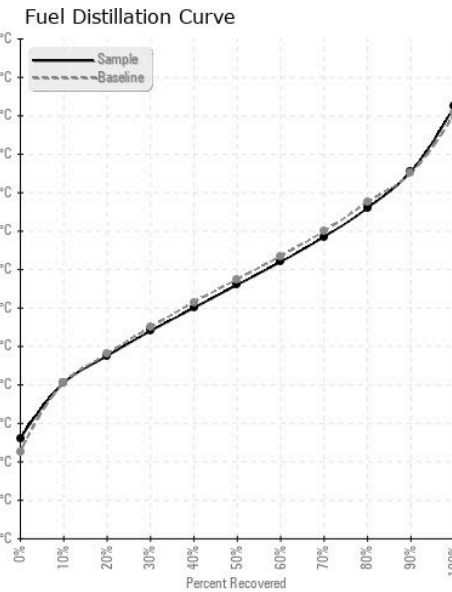

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0001504
Lab Number : **06209634**
Unique Number : 11077095
Test Package : DF-2 (Additional Tests: Fuel, Screen)
Received : 13 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Elizabeth Valachovic

BAKER VEHICLE
 9035 FREEWAY DR
 MACEDONIA, OH
 US 44056

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: P NICHOLS
 P.NICHOLS@BAKERVEHICLE.COM

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: