

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id

015-0064 (S/N 236017) Component Hydraulic System

Hydraulic System Fluid SCHAEFFER 315 SIMPLEX SUPREME (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Hydraulic fluid sample)

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Ppicoco do					
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0868281	WC0815095	WC0814958	
Sample Date		Client Info		10 Jun 2024	02 Oct 2023	18 Jul 2023	
Machine Age	hrs	Client Info		10189	9217	8857	
Oil Age	hrs	Client Info		2205	0	0	
Oil Changed		Client Info		N/A	Not Changd	Not Changd	
Sample Status				NORMAL	ATTENTION	NORMAL	
CONTAMINATION		method	limit/base	current	history1	history2	
Water		WC Method	>0.1	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	4	4	4	
Chromium	ppm	ASTM D5185m	>10	1	1	1	
Nickel	ppm	ASTM D5185m	>10	0	0	0	
Titanium	ppm	ASTM D5185m		0	<1	0	
Silver	ppm	ASTM D5185m		2	2	1	
Aluminum	ppm	ASTM D5185m	>10	2	0	<1	
Lead	ppm	ASTM D5185m	>10	<1	<1	<1	
Copper	ppm	ASTM D5185m	>75	6	6	5	
Tin	ppm	ASTM D5185m	>10	<1	0	<1	
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		<1	<1	<1	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	100	71	64	66	
Barium	ppm	ASTM D5185m		0	<1	0	
Molybdenum	ppm	ASTM D5185m	0	8	8	8	
Manganese	ppm	ASTM D5185m		<1	<1	<1	
Magnesium	ppm	ASTM D5185m	0	19	16	13	
Calcium	ppm	ASTM D5185m	4300	3313	2999	3222	
Phosphorus	ppm	ASTM D5185m	1400	1160	1072	1135	
Zinc	ppm	ASTM D5185m	1700	1396	1249	1348	
Sulfur	ppm	ASTM D5185m	3800	5027	4220	5036	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	9	8	9	
Sodium	ppm	ASTM D5185m		2	0	3	
Potassium	ppm	ASTM D5185m	>20	1	3	1	
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>5000	1595	5516	2155	
Particles >6µm		ASTM D7647	>1300	332	1307	474	
Particles >14µm		ASTM D7647	>160	29	121	39	
Particles >21µm		ASTM D7647	>40	9	33	12	
Particles >38µm		ASTM D7647	>10	1	1	1	
Particles >71µm		ASTM D7647		0	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	20/18/14	18/16/12	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	0.99	1.14	1.23	
I:47:36) Rev: 1 Submitted By: TECH TECHNI							


Report Id: AECCHATN [WUSCAR] 06210029 (Generated: 06/22/2024 04:47:36) Rev: 1


Itted By: IECH TECHNICIAN Page 1 of 2




OIL ANALYSIS REPORT

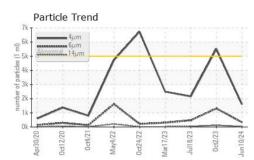


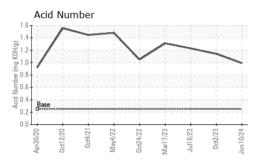





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	59	55.9	54.4	54.2
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						
Bottom						

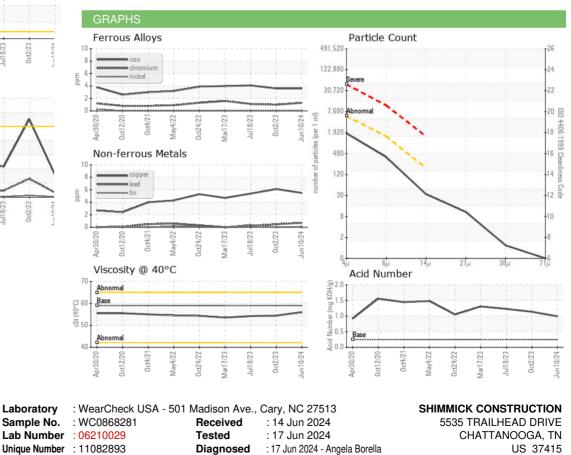



To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : CONST

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: AECCHATN [WUSCAR] 06210029 (Generated: 06/22/2024 04:47:36) Rev: 1

Submitted By: TECH TECHNICIAN

Contact: DANIEL LISELLA

daniel.lisella@shimmick.com

Page 2 of 2

T:

F: