

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id

4478598 (S/N 1162)

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM		method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017924	KCP39427	KCP26842
Sample Date		Client Info		24 May 2024	05 Oct 2021	25 Mar 2020
Machine Age	hrs	Client Info		57824	47894	41535
Oil Age	hrs	Client Info		4000	6000	3000
Oil Changed	1113	Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	SEVERE
				-		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	4
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	<1	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	10	11
Tin	ppm	ASTM D5185m		<1	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	44.11	_	line it //	-	-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	15	<1
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	0	2	4
Calcium	ppm	ASTM D5185m	2	0	0	<1
Phosphorus	ppm	ASTM D5185m		0	4	2
Zinc	ppm	ASTM D5185m		0	9	8
Sulfur	ppm	ASTM D5185m		16943	13969	14313
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	1
Sodium	ppm	ASTM D5185m		1	2	1
Potassium	ppm	ASTM D5185m	>20	3	0	<1
Water	%	ASTM D6304		0.004	0.010	▲ 0.152
ppm Water	ppm	ASTM D6304		40	108.9	▲ 1520
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		309		
Particles >6µm		ASTM D7647 ASTM D7647	>1300	101		
Particles >14µm		ASTM D7647	>80	14		
Particles >21µm		ASTM D7647		4		
Particles >38µm		ASTM D7647 ASTM D7647	>20	4 0		
Particles >30µm		ASTM D7647 ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)				
		13U 4406 (C)	>/17/13	15/14/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.45	0.398	0.393


Report Id: TIMCHA [WUSCAR] 06210160 (Generated: 06/19/2024 13:40:36) Rev: 1


0.45 Contact/Location: Service Manager - TIMCHA Page 1 of 2



OIL ANALYSIS REPORT


0000-	Severe		
8000-			
6000-			
4000.			
2000.	Abcomment		
0-	Abnorma	-	
	Mar25/20	0ct5/2	May24/24



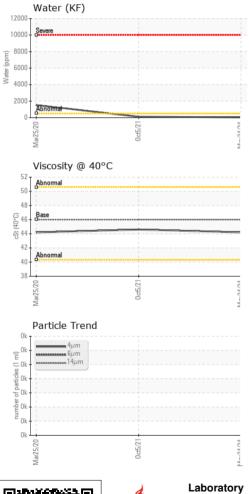



Bottom

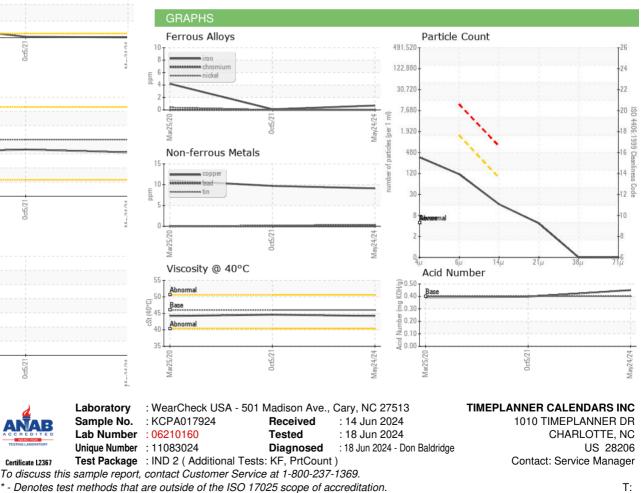

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: Service Manager - TIMCHA Page 2 of 2

F: