<u>Sullivan</u> Palatek

OIL ANALYSIS REPORT

Area PALASYN 45 SULLIVAN PALATEK 21ME002772 - RENA TECH

Component Compressor

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|------------|-------------|-------------|-------------|
| Sample Number | | Client Info | | UCS06210255 | UCS06210266 | UCS06059361 |
| Sample Date | | Client Info | | 08 May 2024 | 21 Feb 2024 | 21 Nov 2023 |
| Machine Age | hrs | Client Info | | 3602 | 2953 | 2215 |
| Oil Age | hrs | Client Info | | 2162 | 1513 | 775 |
| Oil Changed | | Client Info | | Changed | Not Changd | Not Changd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| CONTAMINATION | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 2 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >15 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0.0 | <1 | 993 | 0 |
| Barium | ppm | ASTM D5185m | 0.0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 0.0 | 0 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | 0.0 | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | 966 | 586 | 623 | 638 |
| Zinc | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | 1309 | 988 | 1078 | 1028 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 3 | 2 | 2 |
| Sodium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 0 | 0 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.172 | 0.11 | 0.07 | 0.07 |



OIL ANALYSIS REPORT



| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | LIGHT |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | LIGHT | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 39.9 | 43.0 | 42.2 | 46.9 |
| | | | | | | |
| SAMPLE IMAGES | 6 | method | limit/base | current | history1 | history2 |
| SAMPLE IMAGES | 3 | method | limit/base | current | history1 | history2 |

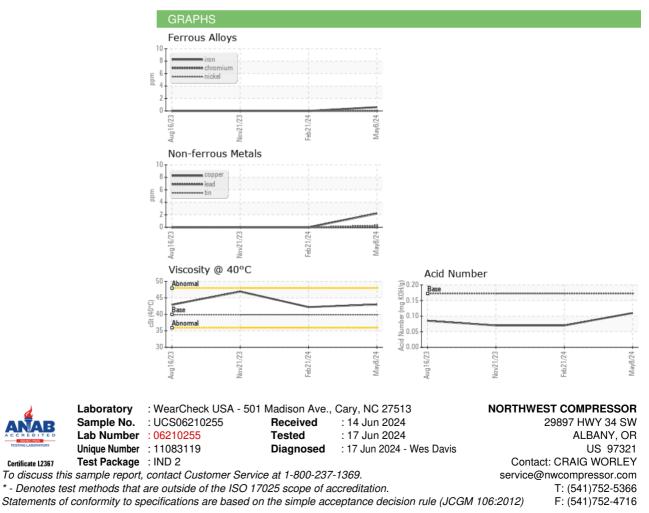

Report Id: UCNORALB [WUSCAR] 06210255 (Generated: 06/17/2024 17:33:51) Rev: 1

Contact/Location: CRAIG WORLEY - UCNORALB