




OIL ANALYSIS REPORT

Sample Rating Trend

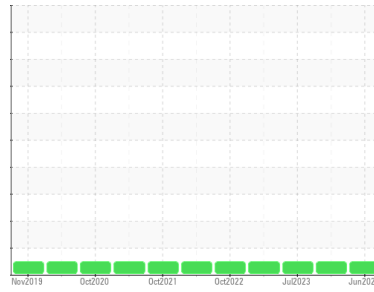

NORMAL



Machine Id
015-0064 (S/N 236017)
 Component
Swing Drive
 Fluid
SCHAEFFER 267 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Swing motor sample)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0868300	WC0815102	WC0814964
Sample Date	Client Info	10 Jun 2024	02 Oct 2023	18 Jul 2023
Machine Age	hrs	10189	9217	8857
Oil Age	hrs	2196	0	0
Oil Changed	Client Info	N/A	Not Changd	Not Changd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >400	11	9	9
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	2	0
Lead	ppm	ASTM D5185m >50	<1	<1	0
Copper	ppm	ASTM D5185m >200	<1	0	0
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	100	103	127
Barium	ppm	ASTM D5185m	2	0	0
Molybdenum	ppm	ASTM D5185m	396	372	407
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1	0	0
Calcium	ppm	ASTM D5185m	37	30	43
Phosphorus	ppm	ASTM D5185m	1093	1051	1226
Zinc	ppm	ASTM D5185m	19	13	2
Sulfur	ppm	ASTM D5185m	21022	19481	26078

CONTAMINANTS


method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >50	6	4	4
Sodium	ppm	ASTM D5185m	1	2	3
Potassium	ppm	ASTM D5185m >20	2	3	2

VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG






OIL ANALYSIS REPORT

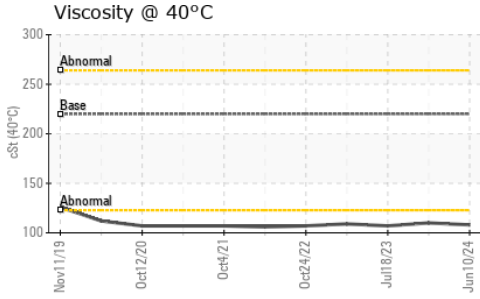

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	108	110	107

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

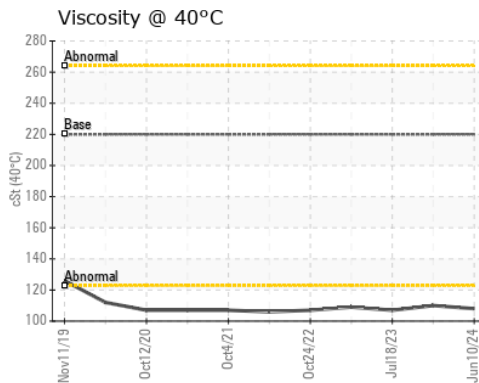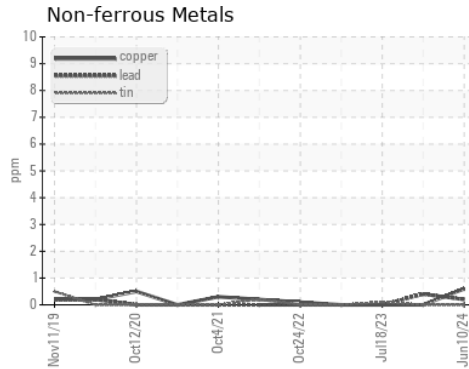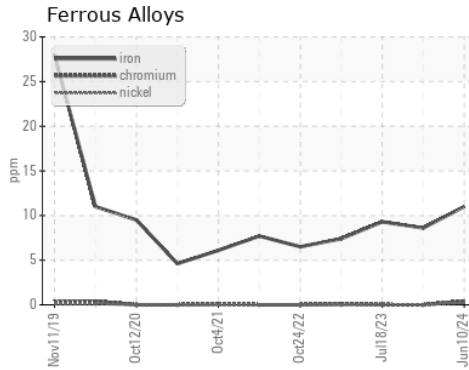

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868300 **Received** : 14 Jun 2024
Lab Number : 06210520 **Tested** : 18 Jun 2024
Unique Number : 11083384 **Diagnosed** : 18 Jun 2024 - Sean Felton
Test Package : CONST

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: