




OIL ANALYSIS REPORT

Sample Rating Trend

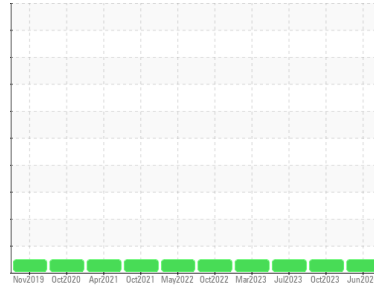

NORMAL



Machine Id
015-0064 (S/N 236017)
 Component
Rear Left Final Drive
 Fluid
SCHAEFFER 267 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Rear left final drive sample)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0868279	WC0815097	WC0814955
Sample Date	Client Info			10 Jun 2024	02 Oct 2023	18 Jul 2023
Machine Age	hrs	Client Info		10189	9217	8857
Oil Age	hrs	Client Info		1121	0	0
Oil Changed	Client Info			N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	41	44	41
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	0	2
Lead	ppm	ASTM D5185m	>25	8	7	7
Copper	ppm	ASTM D5185m	>50	29	28	25
Tin	ppm	ASTM D5185m	>10	2	2	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		34	24	34
Barium	ppm	ASTM D5185m		2	2	0
Molybdenum	ppm	ASTM D5185m		355	336	347
Manganese	ppm	ASTM D5185m		1	1	2
Magnesium	ppm	ASTM D5185m		6	5	<1
Calcium	ppm	ASTM D5185m		11	16	11
Phosphorus	ppm	ASTM D5185m		1092	1117	1193
Zinc	ppm	ASTM D5185m		26	22	7
Sulfur	ppm	ASTM D5185m		23161	22260	27287

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	8	10	9
Sodium	ppm	ASTM D5185m		1	<1	3
Potassium	ppm	ASTM D5185m	>20	3	2	4

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG






OIL ANALYSIS REPORT

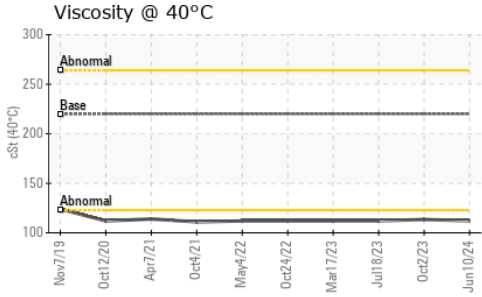

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	220	112	113.5	112

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

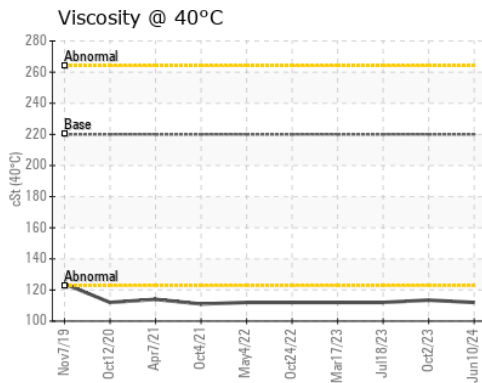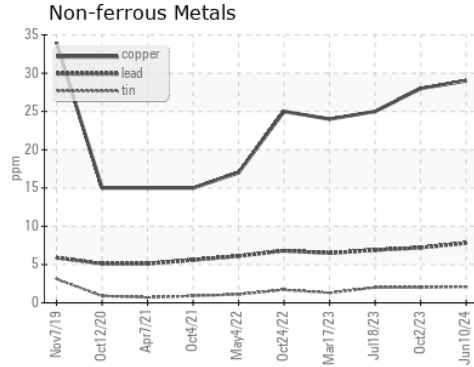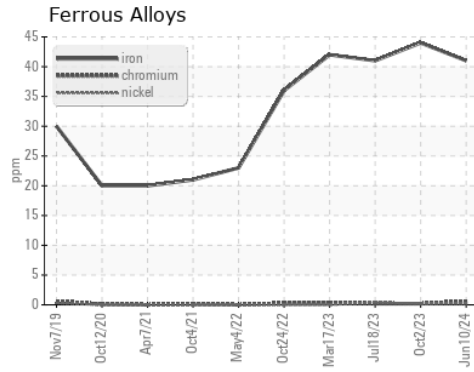

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868279
Lab Number : 06210622
Unique Number : 11083486
Test Package : CONST

Received : 14 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 17 Jun 2024 - Angela Borella

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: