

OIL ANALYSIS REPORT



Machine Id

00014-L02

Hydraulic System Fluid MINERAL OIL ISO VG 46 (600 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.


Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

Viscosity of sample indicates oil is within ISO 68 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



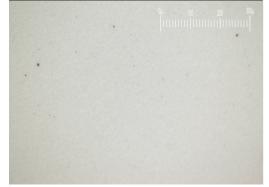

| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|-----------------|-------|--------------|------------|-------------------|----------|----------|
| Sample Number | | Client Info | | PH0001598 | | |
| Sample Date | | Client Info | | 25 Mar 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| CONTAMINATION | l | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.05 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 5 | | |
| Chromium | ppm | ASTM D5185m | >20 | <1 | | |
| Nickel | ppm | ASTM D5185m | >20 | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | | |
| Lead | ppm | ASTM D5185m | >20 | 0 | | |
| Copper | ppm | ASTM D5185m | >20 | 4 | | |
| Tin | ppm | ASTM D5185m | >20 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | <1 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 44 | | |
| Calcium | ppm | ASTM D5185m | | 16 | | |
| Phosphorus | ppm | ASTM D5185m | | 328 | | |
| Zinc | ppm | ASTM D5185m | | 330 | | |
| Sulfur | ppm | ASTM D5185m | | 2795 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 2 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >1300 | 🔺 2578 | | |
| Particles >6µm | | ASTM D7647 | >160 | <u> </u> | | |
| Particles >14µm | | ASTM D7647 | >40 | 31 | | |
| Particles >21µm | | ASTM D7647 | >10 | 7 | | |
| Particles >38µm | | ASTM D7647 | >3 | 0 | | |
| Particles >71µm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >17/14/12 | 19/17/12 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |


Acid Number (AN) mg KOH/g ASTM D8045

0.39

Report Id: IMPPUE [WUSCAR] 06210753 (Generated: 06/20/2024 09:12:55) Rev: 1

Contact/Location: Service Manager - IMPPUE Page 1 of 2

OIL ANALYSIS REPORT

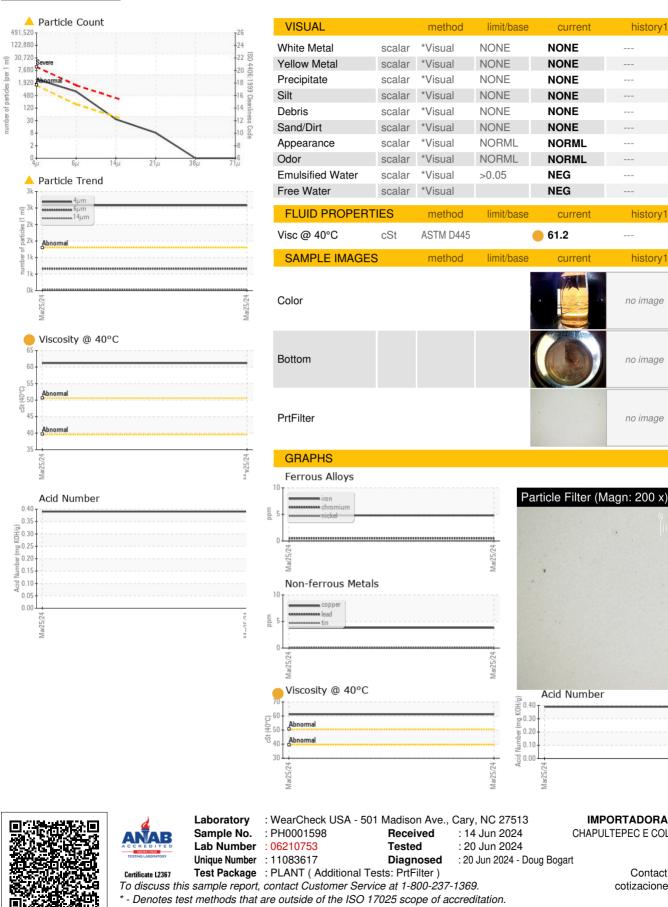

IMPORTADORA RB INDUSTRIAL CHAPULTEPEC E COLEGIO LUZ OBRERA PUEBLA, ZZ MX 72110 Contact: Service Manager cotizaciones@rbindustrial.mx T: F:

history1

history

history1

no image

no image

no image

history2

historv2

history2

no image

no imade

no image

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: IMPPUE [WUSCAR] 06210753 (Generated: 06/20/2024 09:12:55) Rev: 1

Contact/Location: Service Manager - IMPPUE