




OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

Area
BLACKJACK CREEK [200007683]
 Machine Id
39WEA88442 - J-04 (S/N W-122502)
 Component
Wind Turbine Gearbox
 Fluid
FUCHS RENOLIN UNISYN CLP 320 (--- LTR)

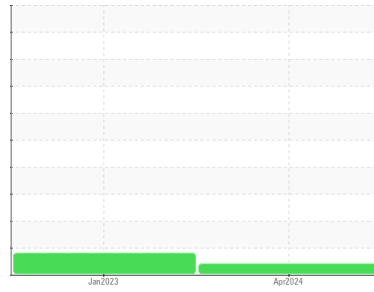

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX015719	NX011501	---
Sample Date	Client Info		15 Apr 2024	23 Jan 2023	---
Machine Age	hrs	Client Info	0	2276	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>40	16	12	---
Iron	ppm	ASTM D5185m	>55	40	19
Chromium	ppm	ASTM D5185m	>2	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	0
Titanium	ppm	ASTM D5185m	>10	<1	0
Silver	ppm	ASTM D5185m		0	0
Aluminum	ppm	ASTM D5185m	>15	2	0
Lead	ppm	ASTM D5185m	>3	2	0
Copper	ppm	ASTM D5185m	>7	<1	0
Tin	ppm	ASTM D5185m	>3	0	0
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		6	4
Barium	ppm	ASTM D5185m		<1	0
Molybdenum	ppm	ASTM D5185m		0	0
Manganese	ppm	ASTM D5185m		1	<1
Magnesium	ppm	ASTM D5185m		<1	0
Calcium	ppm	ASTM D5185m		15	16
Phosphorus	ppm	ASTM D5185m		256	204
Zinc	ppm	ASTM D5185m		15	0
Sulfur	ppm	ASTM D5185m		5422	5155

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	11	7
Sodium	ppm	ASTM D5185m		4	1
Potassium	ppm	ASTM D5185m	>20	2	0
Water	%	ASTM D6304	>0.02	0.002	0.008
ppm Water	ppm	ASTM D6304	>200	23	86.7

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		---	166621	---
Particles >6µm	ASTM D7647	>320	---	▲ 44639	---
Particles >14µm	ASTM D7647	>40	---	156	---
Particles >21µm	ASTM D7647	>10	---	11	---
Particles >38µm	ASTM D7647	>3	---	2	---
Particles >71µm	ASTM D7647	>3	---	1	---
Oil Cleanliness	ISO 4406 (c)	>--/15/12	---	▲ 25/23/14	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.6	0.39	0.37




OIL ANALYSIS REPORT

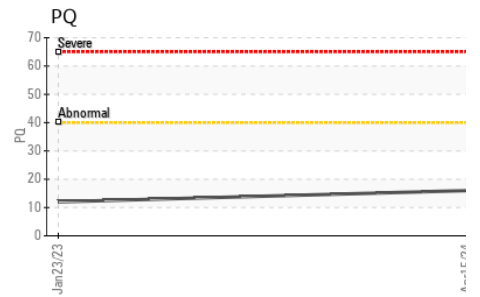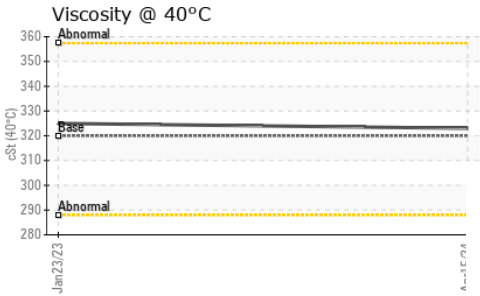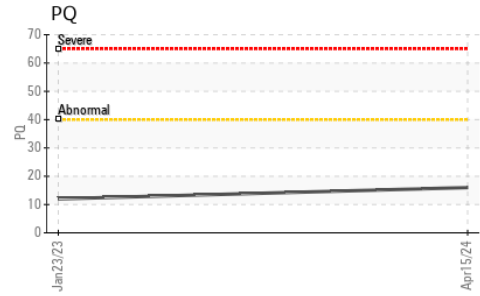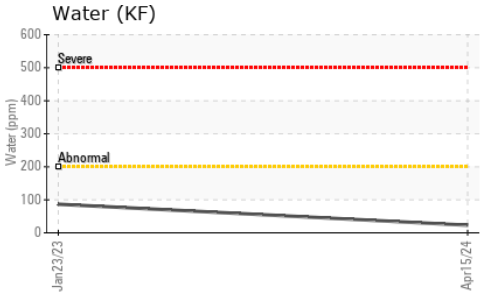





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.02	NEG	NEG
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 320	323	325	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

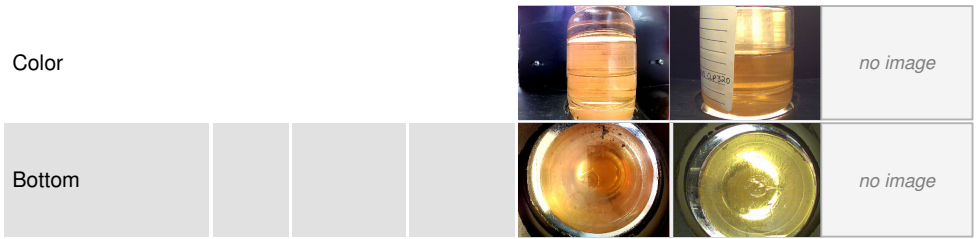

GRAPHS

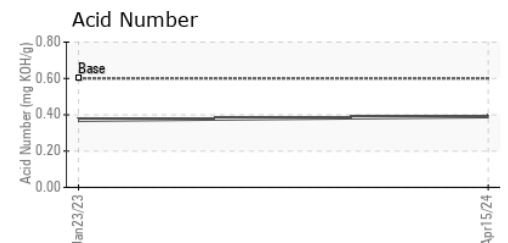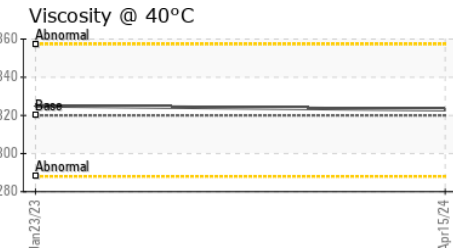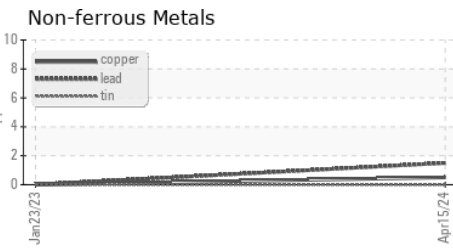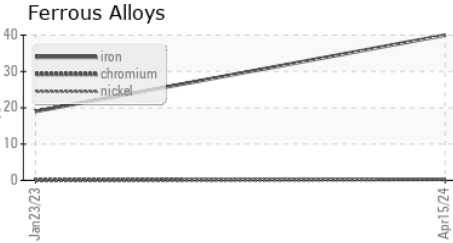

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX015719 **Received** : 14 Jun 2024
Lab Number : **06210766** **Tested** : 19 Jun 2024
Unique Number : 11083630 **Diagnosed** : 19 Jun 2024 - Angela Borella
Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

NORDEX USA - Chicago
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL 60606
 Contact: DEVIN LINEHAN
 DLinehan@nordex-online.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)